

BASE


DECORATIVE, ONE PIECE CORROSION RESISTANT, DURABLE CAST ALUMINUM CONSTRUCTION. MINIMUM .220 WALL THICKNESS. STEPPED FOUR SIDED BASE IS PROVIDED WITH A LARGE HAND HOLE OPENING AND COVER CONTOURED TO BASE DESIGN. HAND HOLE COVER SUPPLIED WITH TAMPER RESISTANT HARDWARE. GROUNDING LUG PROVIDED INSIDE BASE OPPOSITE HAND HOLE.

ANCHORAGE

A 1" CAST ALUMINUM ANCHOR RING IS WELDED 1" ABOVE BOTTOM OF BASE TO ACCEPT (4) FULLY GALVANIZED ANCHOR BOLTS. EACH BOLT SUPPLIED WITH TWO NUTS AND TWO WASHERS. ANCHORAGE IS FASTENED THROUGH HAND HOLE.


FINISH

ELECTROSTATICALLY APPLIED BAKED ON TEXTURED ACRYLIC ENAMEL. (SEE PAGE 5 FOR OPTIONAL FINISH AND COLOR SELECTION)

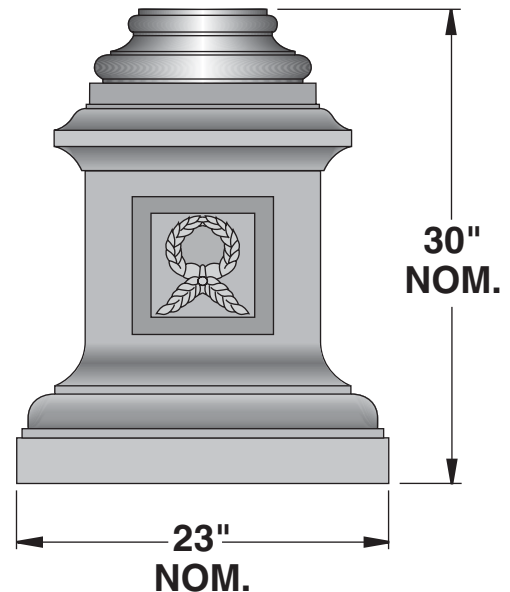



POLE ACCESSORIES (SPECIFY AS SUFFIX TO CAT. NO.)


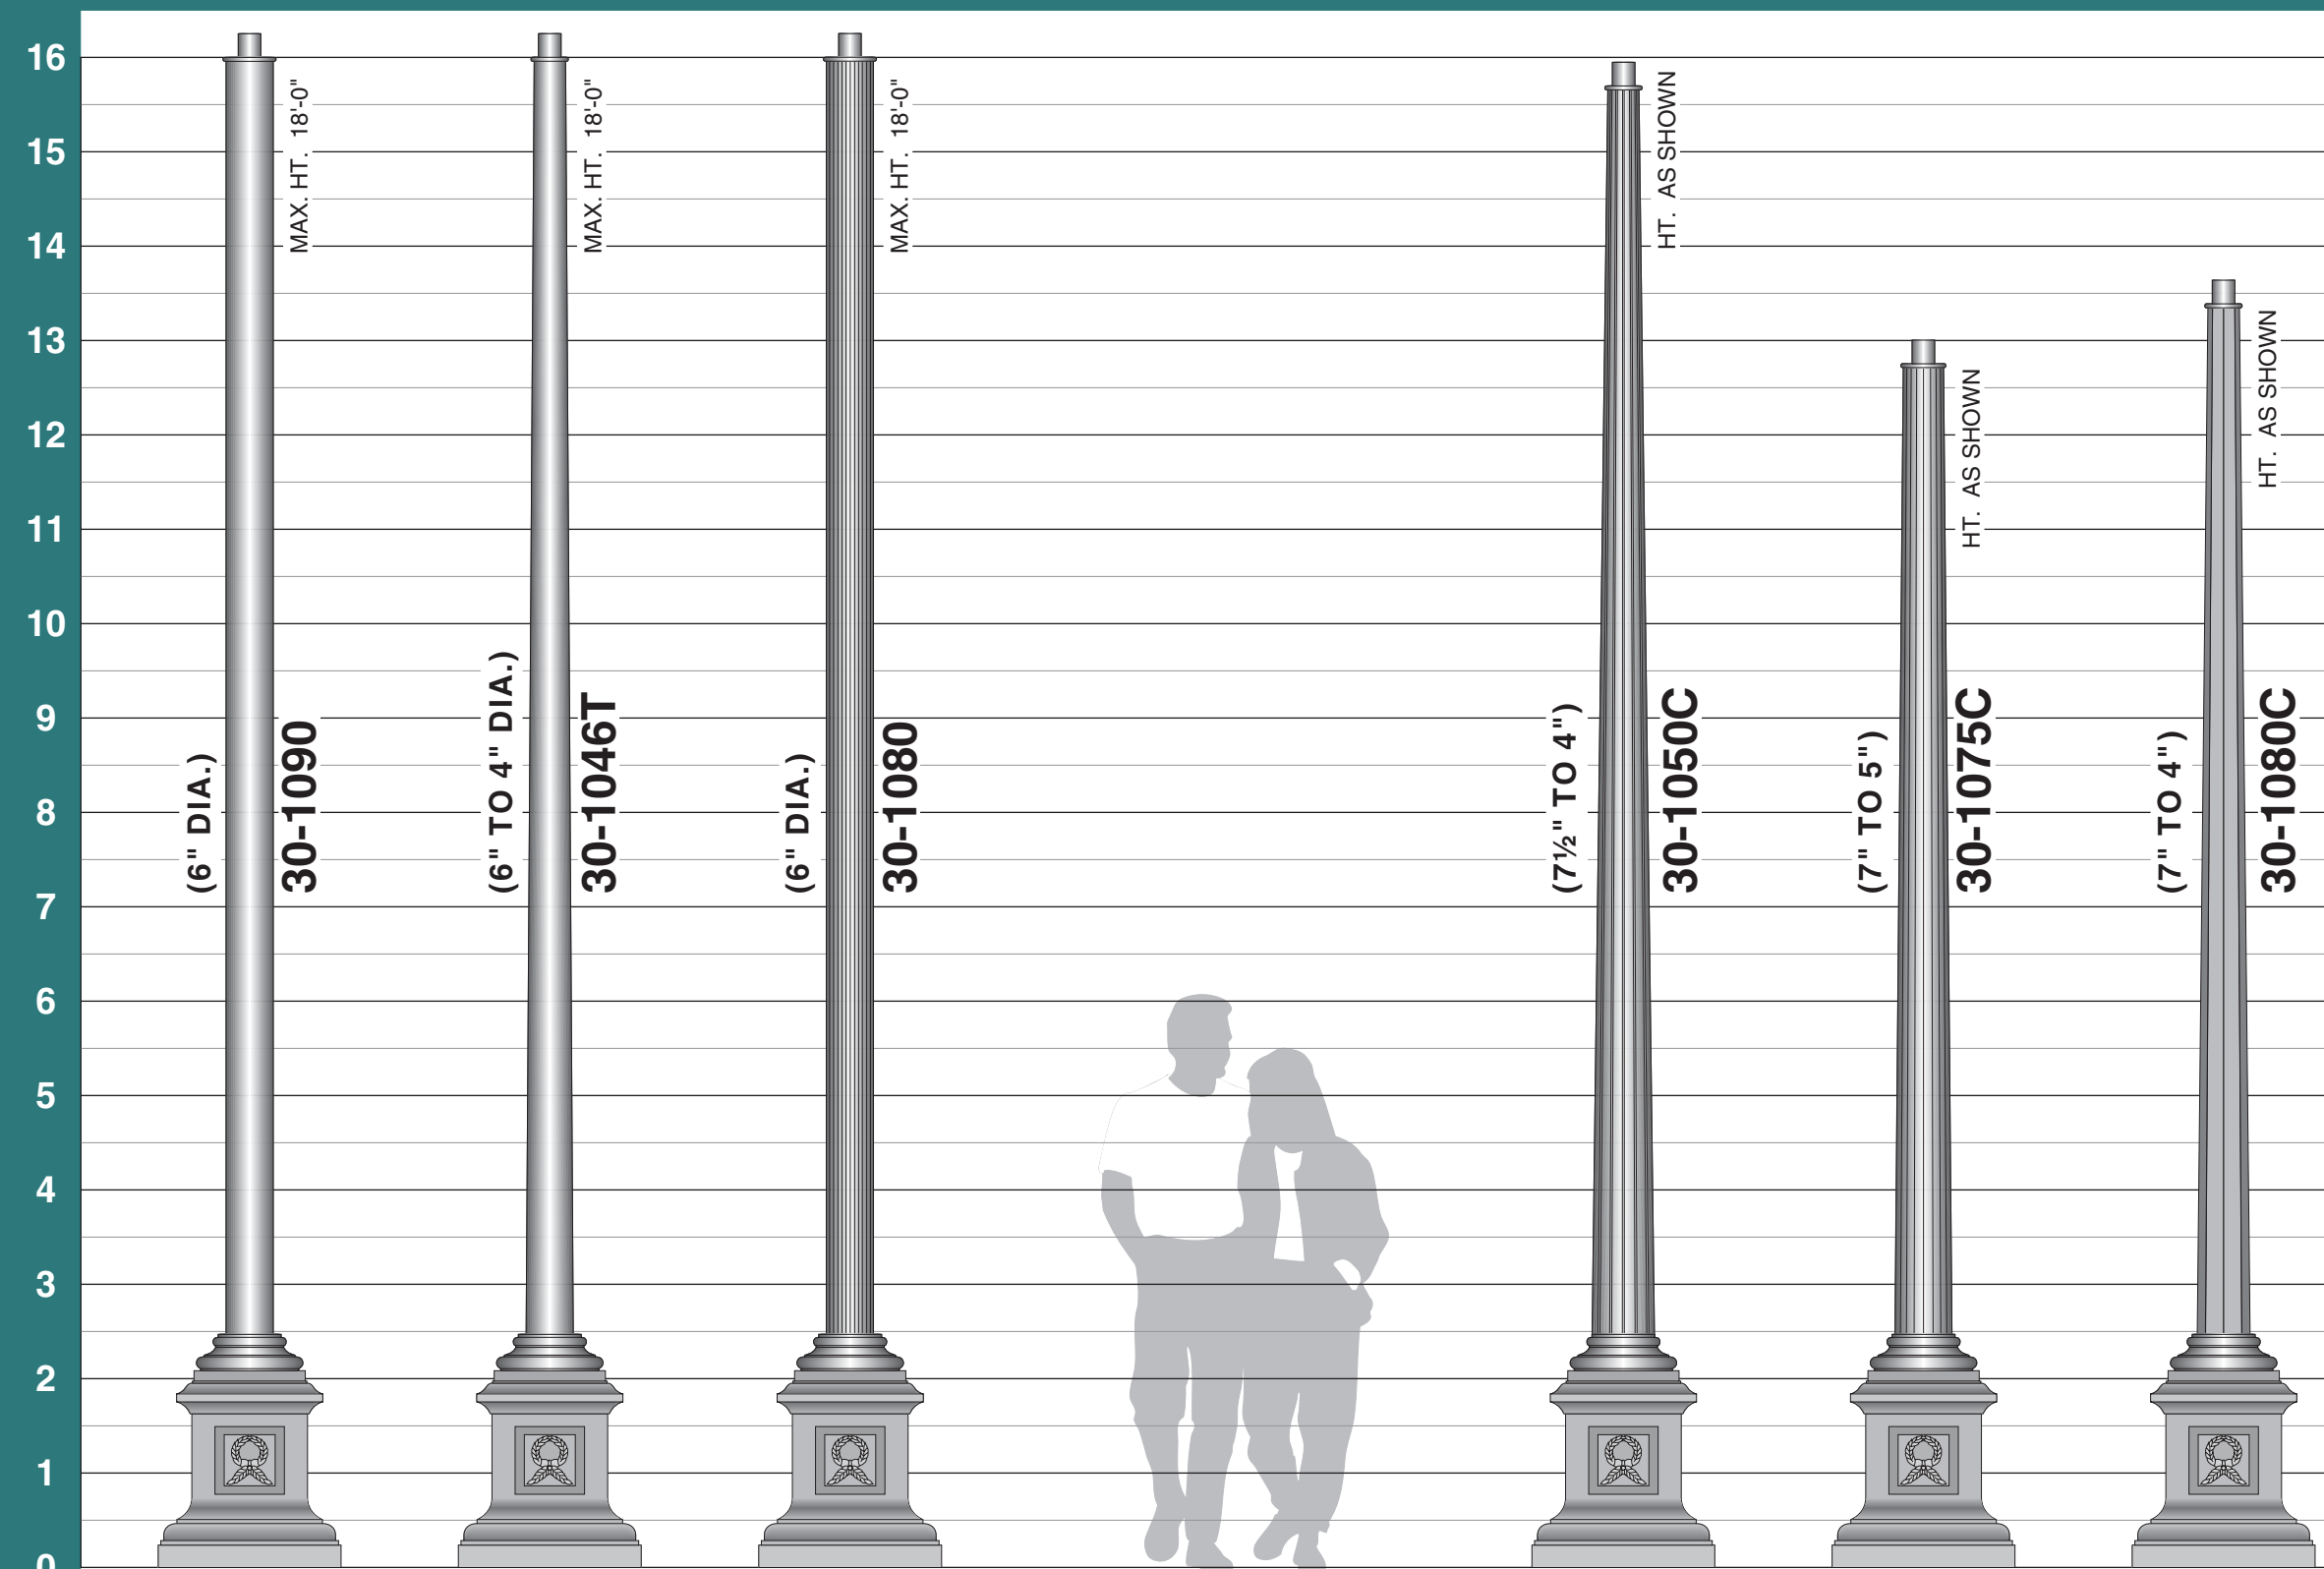


SHAFT IS CIRCUMFERENTIALLY WELDED TO BASE FOR ONE PIECE CONSTRUCTION
SEE SHAFT SECTION FOR SPECIFICATIONS AND ADDITIONAL STYLES


- ### TENONS
- STANDARD: 2 7/8" O.D. **PT23**
 - OPTIONS: 2 3/8" O.D. **PT31**
 - 3 1/2" O.D.
 - DUPLEX OR G.F.I. RECEPTACLE WITH COVER **DUP GFI**
 - FIELD ROTATABLE OR FIXED BANNER ARM **RBA**
 - FBA**
 - BANNER EYE BOLT **BEB**
 - BREAK AWAY BANNER ARM **BBA**
 - FIELD ROTATABLE OR FIXED BASKET HOLDER **RBH**
 - FBH**
 - FIELD ROTATABLE STREET SIGN **RSS**
 - FIELD ROTATABLE LADDER REST **RLR**
 - 20"
 - 1 3/8" I.D.
 - FIELD ROTATABLE OR FIXED FLAG HOLDER **RFH**
 - FFH**

3000 BASE


SUGGESTED LUMINAIRES

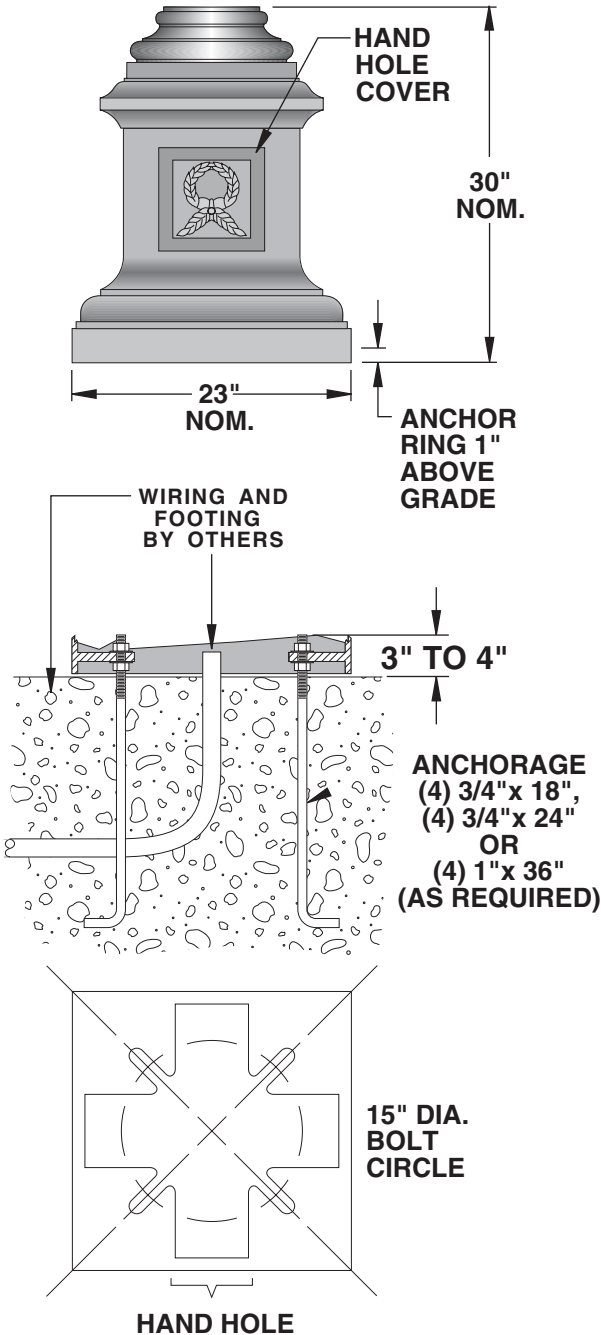


LAA1-YC




LAF1-YA




LCKM1



LCW



LCAD



LG18-YE

SEE LUMINAIRE SECTION FOR ADDITIONAL STYLES