


STRAIGHT TO STRAIGHT

ROUND EXTRUDED FROM 6063 ALLOY ALUMINUM. HEAT TREATED TO PRODUCE A T6 TEMPER. SHAFTS PROVIDED WITH A DECORATIVE CAST ALUMINUM TRANSITION RING.

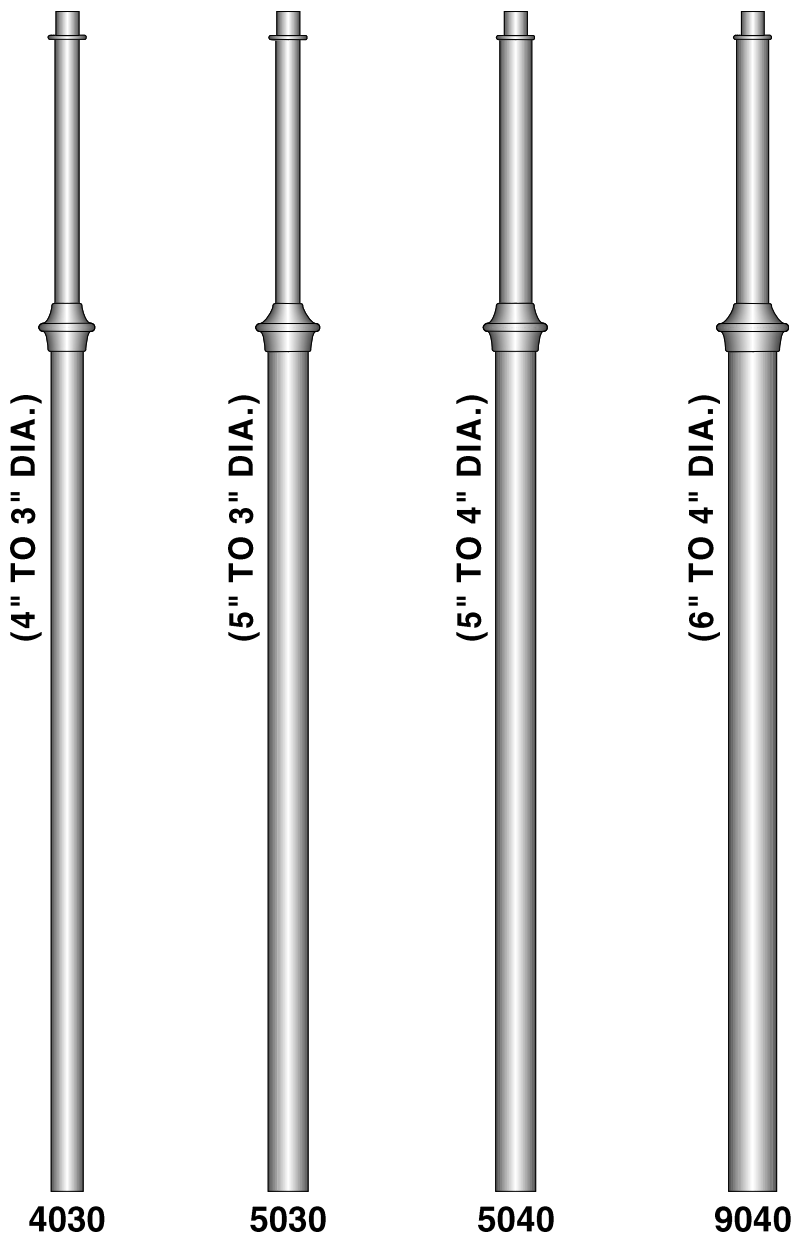

(STRAIGHT TO STRAIGHT ALUMINUM SHAFTS)
 SHAFT WALL THICKNESS .125 OR .188 ENGINEERED TO PROJECT REQUIREMENTS

POLES PROVIDED WITH TENON TOP
 POST TOP (PT): 2 7/8" O.D. X 3"
 MULTIPLE LUMINAIRES: 2 7/8" O.D. X 6"



sun valley
 LIGHTING

660 WEST AVENUE O, PALMDALE, CA 93551
 (661) 233-2000
 FAX (661) 233-2001
www.sunvalleylighting.com