


# STRAIGHT TO STRAIGHT

ROUND EXTRUDED FROM 6063 ALLOY ALUMINUM. HEAT TREATED TO PRODUCE A T6 TEMPER. SHAFTS PROVIDED WITH A DECORATIVE CAST ALUMINUM TRANSITION RING.

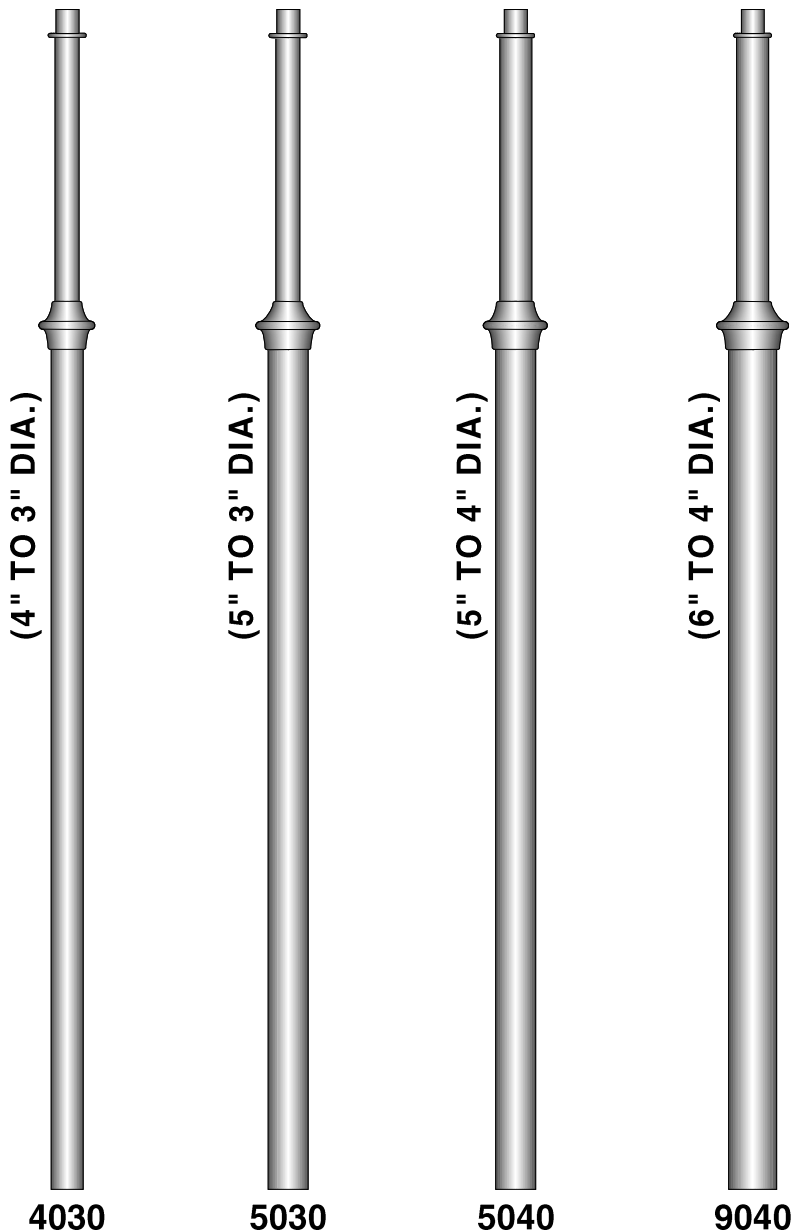

(STRAIGHT TO STRAIGHT ALUMINUM SHAFTS)  
SHAFT WALL THICKNESS .125 OR .188 ENGINEERED TO PROJECT REQUIREMENTS

POLES PROVIDED WITH TENON TOP  
POST TOP (PT): 2 7/8" O.D. X 3"  
MULTIPLE LUMINAIRES: 2 7/8" O.D. X 6"



**sun valley**  
LIGHTING

660 WEST AVENUE O, PALMDALE, CA 93551  
(661) 233-2000  
FAX (661) 233-2001  
[www.sunvalleylighting.com](http://www.sunvalleylighting.com)