
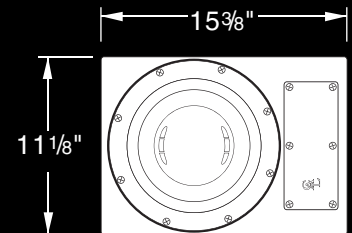
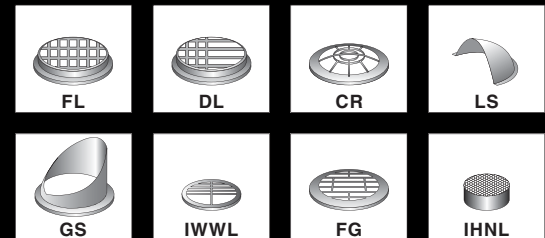


# 4300


## DIRECT BURIAL FIXTURE

### SPECIFICATIONS


- FIXTURE:** **ALUMINUM PRODUCT**-CONSTRUCTED OF PRIMARY 356 CAST ALUMINUM ALLOY. **BRONZE PRODUCT**-CONSTRUCTED OF PRIMARY 844 CAST BRONZE ALLOY.
- LENS:** CLEAR-CONVEX OR FLAT, 1/4" TEMPERED GLASS.  
**OPTIONS:**  
**FWL**-CLEAR FLAT WALKOVER LENS, 3/8" THICK TEMPERED GLASS.  
**PFL**-PRISMATIC FLAT LENS, 1/2" THICK TEMPERED GLASS.
- GASKETING:** **LENS GASKET**-50 S.D.H. "A" SCALE HIGH TEMPERATURE EXTRUDED SILICONE.  
**SPLICE COMPARTMENT GASKET**-60 S.D.H. "A" SCALE-DIE CUT NEOPRENE.
- LAMP HOLDER:** PAR 38/R40 - 4KV PORCELAIN MEDIUM BASE.  
PAR 46 - MEDIUM END PRONG.  
PAR 56 - MOGUL END PRONG.
- LAMP:** (BY OTHERS)-FIELD ADJUSTABLE TO 20° TILT-360° ON AXIS.
- FASTENERS:** 18-8 STAINLESS STEEL OR SILICONE BRONZE.
- WIRING COMPONENTS:** 14 GAUGE 200°C TEMPERATURE RATING. 1/4"-20 GROUNDING LUG PROVIDED.
- SPLICE COMPARTMENT:** SUPPLIED WITH TWO (2) 1/2" OR 3/4" NPT CONDUIT ENTRIES (3/4"-STANDARD). SPLICE COMPARTMENT ISOLATED FROM THE LAMP COMPARTMENT BY AN ANTI-WICKING CHAMBER, SEALED WITH A EPOXY BASED RESIN.
- FINISH:** **ALUMINUM PRODUCT**-3 MIL STGIC THERMOSET EPOXY POWDER COATING.  
**BRONZE PRODUCT**-3 MIL THICK BITUMINOUS COATING APPLIED TO THE EXTERIOR HOUSING.
- TESTING:** FACTORY UNDER WATER POROSITY PRESSURE TEST TO 10 P.S.I.  
  
FACTORY CERTIFIED UNDER WATER LEAK PREVENTION TEST ON 100% OF ALL FINISHED GOODS.
- ETL LISTED FOR WET LOCATION AND CONCRETE POUR APPLICATIONS.

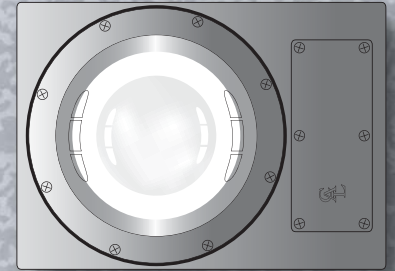

TOP VIEW

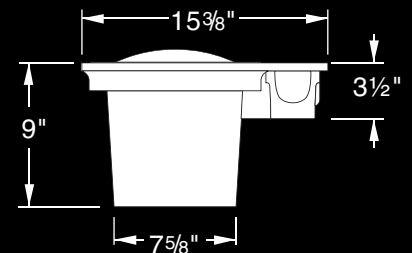

SIDE VIEW

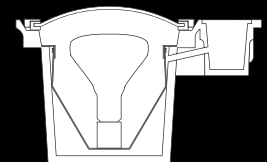


CROSS SECTION

# 4300


## DIRECT BURIAL FIXTURE

TYPE: \_\_\_\_\_


TOP VIEW



SIDE VIEW

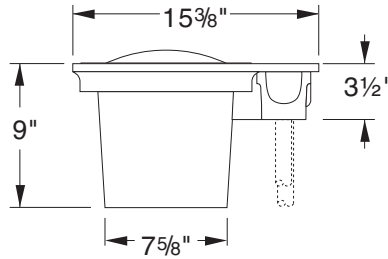

CROSS SECTION



## ORDERING INFORMATION

MODEL NO. :  
4300

MODEL NO. :

4  
3  
0  
0

PART NUMBERS

### PART NUMBERS

- 4300-INC., PAR 38, 150W
- 4300-INC., R- 40, 300W
- 4300-QTZ., PAR 38, 250W
- 4300-INC., PAR 46, 200W
- 4300-INC., PAR 56, 300W
- 4300-QTZ., PAR 56, 500W

FINISH

### FINISH

- DARK BRONZE. . . . DB  
(STANDARD COLOR)
- BLACK. . . . .BK
- WHITE. . . . .WT
- ALUMINUM. . . . .AL

OPTIONS

### OPTIONS

- ALUMINUM. . . . . "A"
- BRONZE. . . . . "B"
- CONVEX LENS. . . . . "C"
- FLAT LENS. . . . . "F"
- FULL LOUVER. . . . . "FL"
- DIRECTIONAL LOUVER. . . . . "DL"
- CONVEX ROCKGUARD. . . . . "CR"
- LIGHT SHIELD. . . . . "LS"
- GLARE SHIELD. . . . . "GS"
- FLAT GRILL. . . . . "FG"
- FLAT WALKOVER LENS. . . . . "FWL"
- PRISMATIC FLAT LENS. . . . . "PFL"
- INTERNAL WALL WASH LOUVER. . . . . "IWWL"
- INTERNAL HONEYCOMB LOUVER. . . . . "IHNL"
- WALL WASH SYSTEM. . . . . "WWS"

US ARCHITECTURAL. RESERVES THE RIGHT TO MAKE CONTINUED PRODUCT DESIGN AND CONSTRUCTION IMPROVEMENTS WHICH MAY AFFECT THE PRODUCT ILLUSTRATED

