

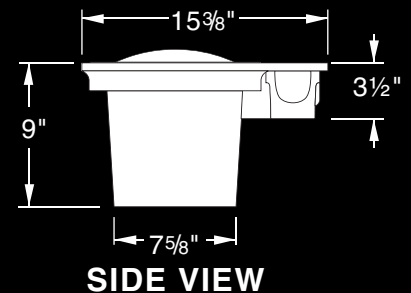
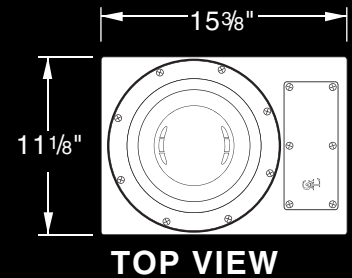
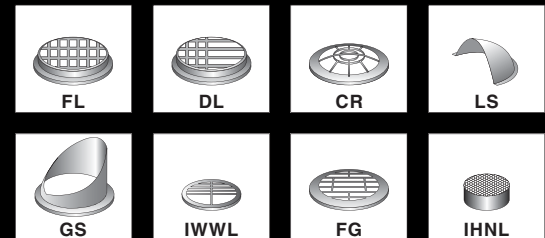


4300

DIRECT BURIAL FIXTURE

SPECIFICATIONS

- FIXTURE:** **ALUMINUM PRODUCT**-CONSTRUCTED OF PRIMARY 356 CAST ALUMINUM ALLOY. **BRONZE PRODUCT**-CONSTRUCTED OF PRIMARY 844 CAST BRONZE ALLOY.
- LENS:** CLEAR-CONVEX OR FLAT, 1/4" TEMPERED GLASS.
- OPTIONS:**
FWL-CLEAR FLAT WALKOVER LENS, 3/8" THICK TEMPERED GLASS.
PFL-PRISMATIC FLAT LENS, 1/2" THICK TEMPERED GLASS.
- GASKETING:** **LENS GASKET**-50 S.D.H. "A" SCALE HIGH TEMPERATURE EXTRUDED SILICONE. **SPLICE COMPARTMENT GASKET**-60 S.D.H. "A" SCALE-DIE CUT NEOPRENE.
- LAMP HOLDER:** PAR 38/R40 - 4KV PORCELAIN MEDIUM BASE. PAR 46 - MEDIUM END PRONG. PAR 56 - MOGUL END PRONG.
- LAMP:** (BY OTHERS)-FIELD ADJUSTABLE TO 20° TILT-360° ON AXIS.
- FASTENERS:** 18-8 STAINLESS STEEL OR SILICONE BRONZE.
- WIRING COMPONENTS:** 14 GAUGE 200°C TEMPERATURE RATING. 1/4"-20 GROUNDING LUG PROVIDED.
- SPLICE COMPARTMENT:** SUPPLIED WITH TWO (2) 1/2" OR 3/4" NPT CONDUIT ENTRIES (3/4"-STANDARD). SPLICE COMPARTMENT ISOLATED FROM THE LAMP COMPARTMENT BY AN ANTI-WICKING CHAMBER, SEALED WITH A EPOXY BASED RESIN.
- FINISH:** **ALUMINUM PRODUCT**-3 MIL STGIC THERMOSET EPOXY POWDER COATING. **BRONZE PRODUCT**-3 MIL THICK BITUMINOUS COATING APPLIED TO THE EXTERIOR HOUSING.
- TESTING:** FACTORY UNDER WATER POROSITY PRESSURE TEST TO 10 P.S.I.
FACTORY CERTIFIED UNDER WATER LEAK PREVENTION TEST ON 100% OF ALL FINISHED GOODS.
- ETL LISTED FOR WET LOCATION AND CONCRETE POUR APPLICATIONS.

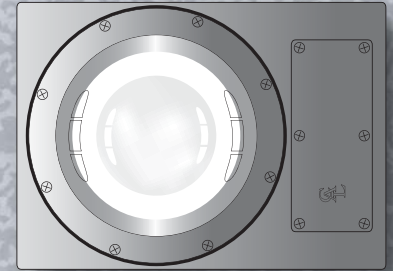


4300


DIRECT BURIAL FIXTURE

TYPE: _____


TOP VIEW



SIDE VIEW

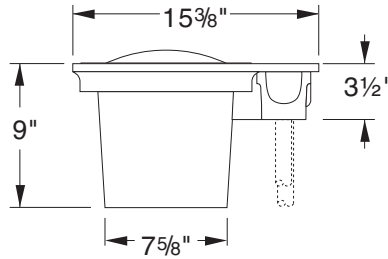

CROSS SECTION



ORDERING INFORMATION

MODEL NO. :
4300

PART NUMBERS

FINISH

OPTIONS

MODEL NO. :

PART NUMBERS

FINISH

OPTIONS

4
3
0
0

- 4300-INC., PAR 38, 150W
- 4300-INC., R- 40, 300W
- 4300-QTZ., PAR 38, 250W
- 4300-INC., PAR 46, 200W
- 4300-INC., PAR 56, 300W
- 4300-QTZ., PAR 56, 500W

- DARK BRONZE. . . . DB
(STANDARD COLOR)
- BLACK.BK
- WHITE.WT
- ALUMINUM.AL

- ALUMINUM. "A"
- BRONZE. "B"
- CONVEX LENS. "C"
- FLAT LENS. "F"
- FULL LOUVER. "FL"
- DIRECTIONAL LOUVER. "DL"
- CONVEX ROCKGUARD. "CR"
- LIGHT SHIELD. "LS"
- GLARE SHIELD. "GS"
- FLAT GRILL. "FG"
- FLAT WALKOVER LENS. "FWL"
- PRISMATIC FLAT LENS. "PFL"
- INTERNAL WALL WASH LOUVER. "IWWL"
- INTERNAL HONEYCOMB LOUVER. "IHNL"
- WALL WASH SYSTEM. "WWS"

US ARCHITECTURAL. RESERVES THE RIGHT TO MAKE CONTINUED PRODUCT DESIGN AND CONSTRUCTION IMPROVEMENTS WHICH MAY AFFECT THE PRODUCT ILLUSTRATED

