




BRA

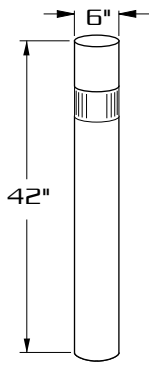

BRA6
[75 WATT MAX.]

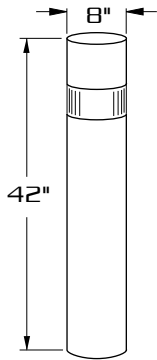

BRA8
[100 WATT MAX.]

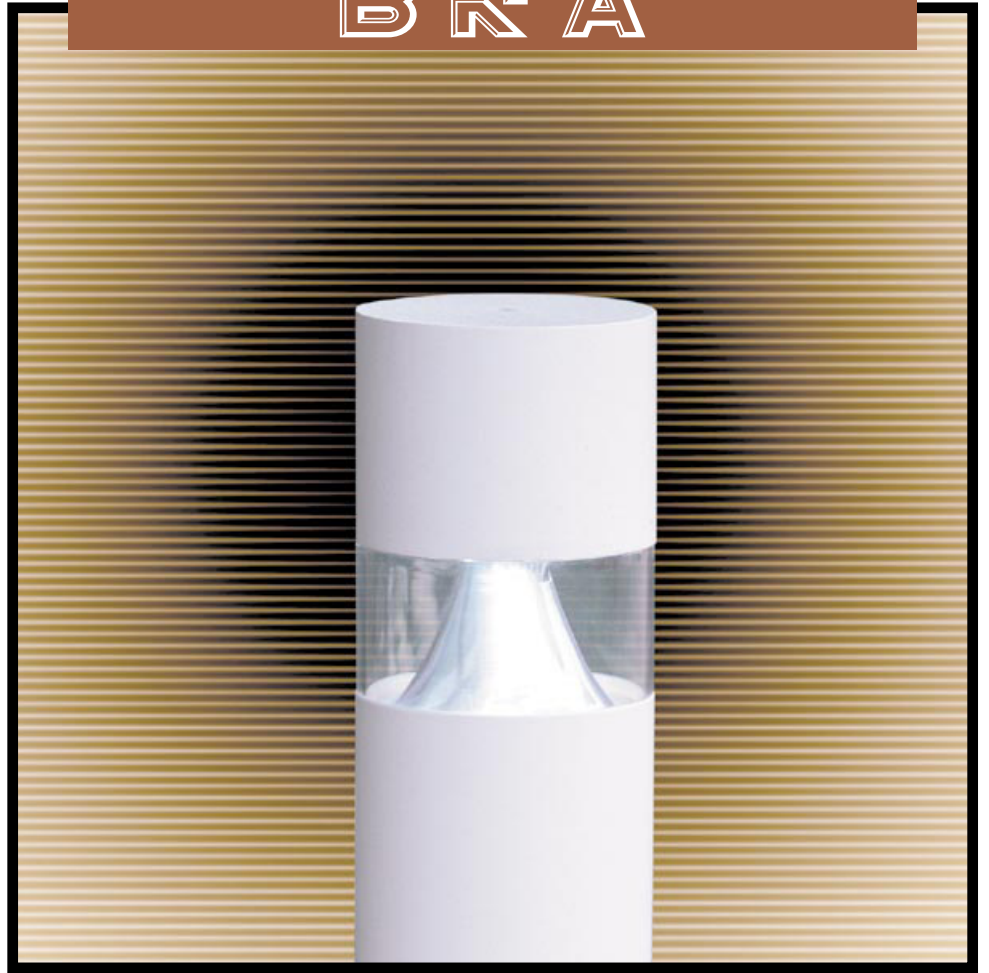

TWIN REFLECTOR



INTERNAL LOUVER



CAST LOUVER



PRIS. GLASS
REFRACTOR



OPAL DIFFUSER

SPECIFICATIONS

HOUSING: HEAVY WALL EXTRUDED ALUMINUM CONSTRUCTION.

TOP CAP: DURABLE, CORROSION RESISTANT CAST ALUMINUM CONSTRUCTION.

OPTICAL TRAIN: [TR] INJECTION MOLDED ACRYLIC LENS, 1/4" WALL THICKNESS. LENS SURROUNDS CLEAR ANODIZED TWIN REFLECTOR SYSTEM.

OPTIONS:

[IL] CLEAR ACRYLIC LENS SURROUNDS ANODIZED ALUMINUM LOUVER TRAIN.

[CL] DURABLE, CORROSION RESISTANT CAST ALUMINUM LOUVER SYSTEM PROVIDES 30° CUT-OFF FOR BRIGHTNESS CONTROL. INTERNAL CLEAR GLASS CYLINDER SURROUNDS LAMP.

[PG] CLEAR ACRYLIC LENS SURROUNDS PRISMATIC GLASS REFRACTOR.

[WA] OPAL ACRYLIC LENS.

GASKETING: CLOSED CELL SILICONE.

LAMP HOLDER: MEDIUM BASE PORCELAIN.

LAMP: [BY OTHERS]

BALLAST: H.P.F./C.W.A. AUTOTRANSFORMER, -20° STARTING TEMPERATURE. ELECTRICAL COMPONENTS ARE MOUNTED TO REMOVABLE BALLAST TRAY FOR MAINTENANCE EASE. BALLAST EQUIPPED WITH FACTORY INSTALLED QUICK DISCONNECT PLUG.

BASE PLATE: PRECISE ONE PIECE CAST ALUMINUM CONSTRUCTION. ANCHOR PLATE IS MECHANICALLY FASTENED TO HOUSING.


ANCHORAGE: [4] 3/8"X10" FULLY GALVANIZED ANCHOR BOLTS EACH SUPPLIED WITH TWO NUTS AND TWO WASHERS.

FINISH: POLYESTER POWDER COAT-STATE OF THE ART 20 PSI PRESSURE POWER WASH AT 140° TEMPERATURE INCORPORATES FOUR STEP IRON PHOSPHATE PROCESS TO CLEANSE AND PRETREAT THE METAL SURFACE FOR MAXIMUM PAINT ADHESION. ELECTROSTATICALLY APPLIED TEXTURED POLYESTER POWDER TOPCOAT IS BAKED AT 400° TEMPERATURE FOR MAXIMUM HARDNESS AND EXTERIOR DURABILITY.



STANDARD:

OPTICS



(TR)
TWIN REFLECTOR
SUPPLIED WITH
CLEAR ACRYLIC LENS

OPTIONS:



(IL)
INTERNAL LOUVER
SUPPLIED WITH
CLEAR ACRYLIC LENS



(CL)
CAST LOUVER
H.I.D. UNITS
SUPPLIED WITH
INTERNAL GLASS DIFFUSER

FLUORESCENT UNITS
SUPPLIED WITH INTERNAL
POLYCARBONATE DIFFUSER




(PG)
PRISMATIC GLASS
SUPPLIED WITH
CLEAR ACRYLIC LENS




(WA)
OPAL ACRYLIC

**WALL MOUNT
STYLE**

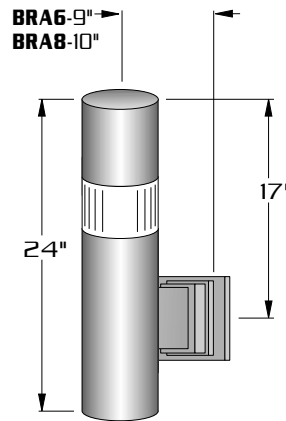


EXTRUDED ALUMINUM ARM AND
CAST ALUMINUM WALL BRACKET
ASSEMBLY PROVIDED WITH BUILT
IN GASKETED WIRE ACCESS FOR
FIXTURE/SUPPLY WIRE CONNECTION.


WALL PLATE



**LAMP SIZE:
13 - 100 WATT**

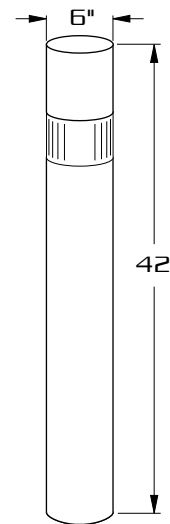

BRAG
[75 W. MAX.]

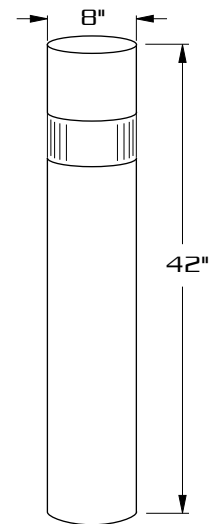

BRAB
[100 W. MAX.]

EXTRUDED ALUMINUM
CONSTRUCTION.

CAST ALUMINUM TOP.

CAST ALUMINUM BALLAST
HOUSING.

ORDERING INFORMATION

| MODEL NO.: | OPTICS | WATTAGE TYPE VOLTAGE | MOUNTING | FINISH | OPTIONS |
|------------|--------|----------------------|----------|--------|---------|
| BRA | | | | | |

| MODEL NO.: | OPTICS | LAMP | MOUNTING | FINISH | OPTIONS |
|----------------------|---|---|--|--|--|
| B R A | <p>STANDARD:</p> <input type="checkbox"/> TWIN REFLECTOR TR | <p>WATTAGE TYPE VOLTAGE</p> <input type="checkbox"/> 100* <input type="checkbox"/> HPS <input type="checkbox"/> 120 <input type="checkbox"/> 75 <input type="checkbox"/> MH <input type="checkbox"/> 277 <input type="checkbox"/> 70 <input type="checkbox"/> MV <input type="checkbox"/> MT <input type="checkbox"/> 50 <input type="checkbox"/> PL <input type="checkbox"/> 42 <input type="checkbox"/> INC <input type="checkbox"/> 35 <input type="checkbox"/> 26 <input type="checkbox"/> 18 <input type="checkbox"/> 13 | <p>GROUND INSTALLATION</p> <p>6" DIA. BOLLARD</p> <p>4" DIA. BOLT CIRCLE</p> <p>8" DIA. BOLLARD</p> <p>6" DIA. BOLT CIRCLE</p> <p>ANCHOR BOLT (4) 3/8" X 10"</p> | <p>STANDARD TEXTURED FINISH</p> <input type="checkbox"/> BLACK RAL-9005-T <input type="checkbox"/> WHITE RAL-9003-T <input type="checkbox"/> GREY RAL-7004-T <input type="checkbox"/> DRK BRONZE RAL-8019-T <input type="checkbox"/> GREEN RAL-6005-T <p>FOR SMOOTH FINISH REMOVE SUFFIX "T" (EXAMPLE: RAL-9500) SEE WEBSITE FOR ADDITIONAL COLORS</p> | <input type="checkbox"/> HOUSE SIDE SHIELD 90° HS 90° 135° HS 135° 180° HS 180° <input type="checkbox"/> DUPLEX RECEPTACLE DUP <input type="checkbox"/> GROUND FAULT RECEPTACLE GFI <input type="checkbox"/> SINGLE FUSE (120V., 277V) SF <input type="checkbox"/> DOUBLE FUSE (208V., 240V) DF <input type="checkbox"/> WALL MOUNT WM <p>OPTIONAL HEIGHTS:</p> <input type="checkbox"/> 30" <input type="checkbox"/> 36" |
| | <p>OPTIONS:</p> <input type="checkbox"/> INTERNAL LOUVER IL <input type="checkbox"/> CAST ALUMINUM LOUVER CL <input type="checkbox"/> PRISMATIC GLASS TYPE V PG-V <input type="checkbox"/> PRISMATIC GLASS TYPE III PG-III <input type="checkbox"/> OPAL ACRYLIC WA | <p>*AVAILABLE WITH 8" BOLLARD ONLY</p> | | | |