



**BSA6**  
[75 WATT MAX.]



**BSA8**  
[100 WATT MAX.]

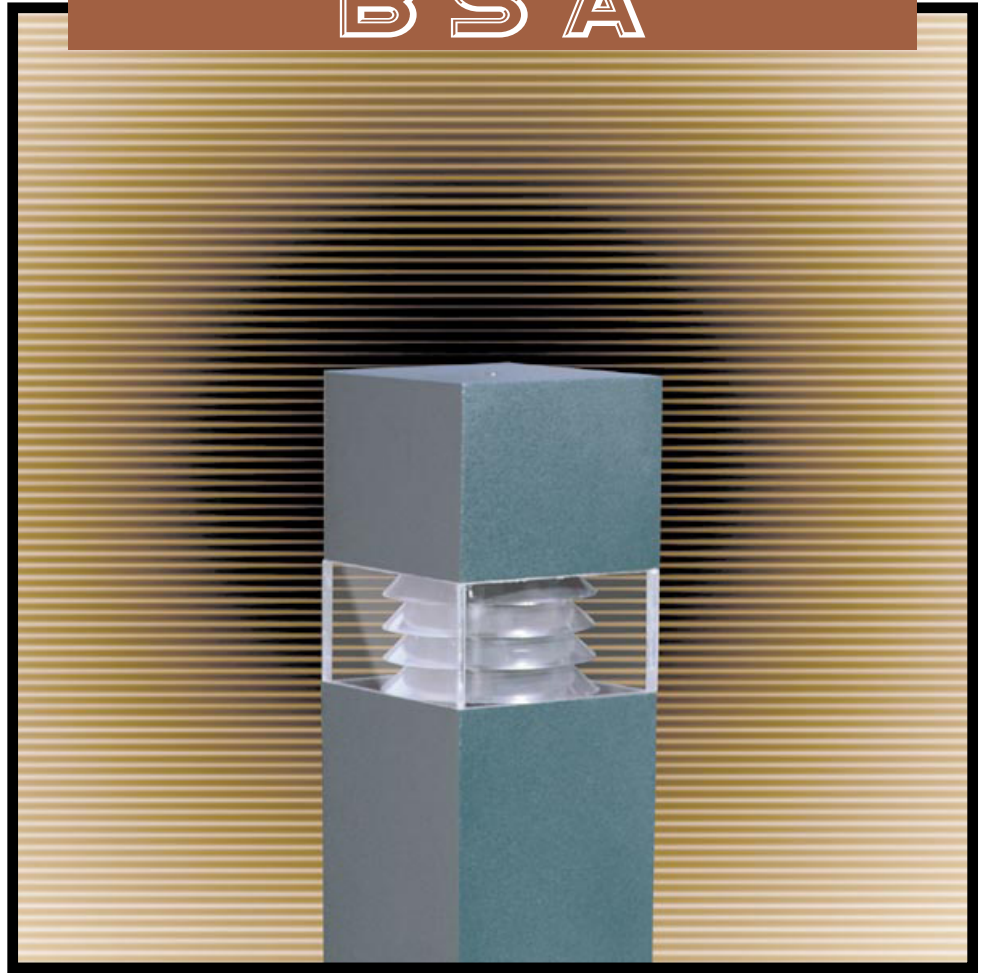

TWIN REFLECTOR



INTERNAL LOUVER



CAST LOUVER



PRIS. GLASS REFRACTOR



OPAL DIFFUSER

## SPECIFICATIONS

**HOUSING:** HEAVY WALL EXTRUDED ALUMINUM CONSTRUCTION.

**TOP CAP:** DURABLE, CORROSION RESISTANT CAST ALUMINUM CONSTRUCTION.

**OPTICAL TRAIN:** [TR] CLEAR ACRYLIC LENS, 1/4" MINIMUM WALL THICKNESS. LENS SURROUNDS CLEAR ANODIZED TWIN REFLECTOR SYSTEM.

**OPTIONS:**

[IL] CLEAR ACRYLIC LENS SURROUNDS ANODIZED ALUMINUM LOUVER TRAIN.

[CL] DURABLE, CORROSION RESISTANT CAST ALUMINUM LOUVER SYSTEM PROVIDES 30° CUT-OFF FOR BRIGHTNESS CONTROL. INTERNAL CLEAR GLASS CYLINDER SURROUNDS LAMP.

[PG] CLEAR ACRYLIC LENS SURROUNDS PRISMATIC GLASS REFRACTOR.

[WA] OPAL ACRYLIC LENS.

**GASKETING:** CLOSED CELL SILICONE.

**LAMP HOLDER:** MEDIUM BASE PORCELAIN.

**LAMP:** [BY OTHERS]

**BALLAST:** H.P.F./C.W.A. AUTOTRANSFORMER, -20° STARTING TEMPERATURE. ELECTRICAL COMPONENTS ARE MOUNTED TO REMOVABLE BALLAST TRAY FOR MAINTENANCE EASE. BALLAST EQUIPPED WITH FACTORY INSTALLED QUICK DISCONNECT PLUG.

**BASE PLATE:** PRECISE ONE PIECE CAST ALUMINUM CONSTRUCTION. ANCHOR PLATE IS MECHANICALLY FASTENED TO HOUSING.


**ANCHORAGE:** [4] 3/8"X10" FULLY GALVANIZED ANCHOR BOLTS EACH SUPPLIED WITH TWO NUTS AND TWO WASHERS.

**FINISH:** POLYESTER POWDER COAT-STATE OF THE ART 20 PSI PRESSURE POWER WASH AT 140° TEMPERATURE INCORPORATES FOUR STEP IRON PHOSPHATE PROCESS TO CLEANSE AND PRETREAT THE METAL SURFACE FOR MAXIMUM PAINT ADHESION. ELECTROSTATICALLY APPLIED TEXTURED POLYESTER POWDER TOPCOAT IS BAKED AT 400° TEMPERATURE FOR MAXIMUM HARDNESS AND EXTERIOR DURABILITY.




STANDARD:

**OPTICS**




(TR)  
**TWIN REFLECTOR**  
SUPPLIED WITH  
CLEAR ACRYLIC LENS


OPTIONS:




(IL)  
**INTERNAL LOUVER**  
SUPPLIED WITH  
CLEAR ACRYLIC LENS



(CL)  
**CAST LOUVER**  
H.I.D. UNITS  
SUPPLIED WITH  
INTERNAL GLASS DIFFUSER  
FLUORESCENT UNITS  
SUPPLIED WITH INTERNAL  
POLYCARBONATE DIFFUSER




(PG)  
**PRISMATIC GLASS**  
SUPPLIED WITH  
CLEAR ACRYLIC LENS




(WA)  
**OPAL ACRYLIC**

**WALL MOUNT  
STYLE**

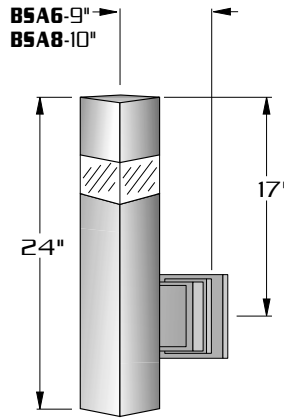


EXTRUDED ALUMINUM ARM AND  
CAST ALUMINUM WALL BRACKET  
ASSEMBLY PROVIDED WITH BUILT  
IN GASKETED WIRE ACCESS FOR  
FIXTURE/SUPPLY WIRE CONNECTION.


**WALL PLATE**



**LAMP SIZE:  
13 - 100 WATT**

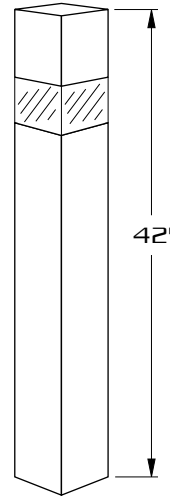

**BSA6**  
[75 W. MAX.]

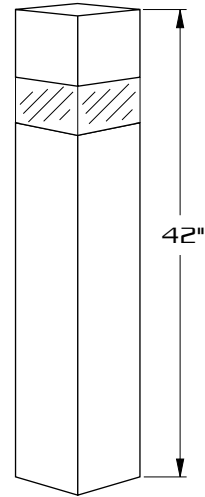



**BSA8**  
[100 W. MAX.]

EXTRUDED ALUMINUM  
CONSTRUCTION.

CAST ALUMINUM TOP.

INTEGRAL CAST ALUMINUM  
BALLAST HOUSING.

**ORDERING INFORMATION**

MODEL NO.:	OPTICS	WATTAGE TYPE VOLTAGE	MOUNTING	FINISH	OPTIONS
<b>BSA</b>					
MODEL NO.:	OPTICS	LAMP	MOUNTING	FINISH	OPTIONS
<b>B S A</b>	<b>STANDARD:</b> <input type="checkbox"/> TWIN REFLECTOR <b>TR</b>	<b>WATTAGE TYPE VOLTAGE</b> <input type="checkbox"/> 100* <input type="checkbox"/> HPS <input type="checkbox"/> 120 <input type="checkbox"/> 75 <input type="checkbox"/> MH <input type="checkbox"/> 277 <input type="checkbox"/> 70 <input type="checkbox"/> MV <input type="checkbox"/> MT <input type="checkbox"/> 50 <input type="checkbox"/> PL <input type="checkbox"/> 42 <input type="checkbox"/> INC <input type="checkbox"/> 35 <input type="checkbox"/> 26 <input type="checkbox"/> 18 <input type="checkbox"/> 13	<b>GROUND INSTALLATION</b> <b>6" SQ. BOLLARD</b> 4" DIA. BOLT CIRCLE  <b>8" SQ. BOLLARD</b> 6" DIA. BOLT CIRCLE  ANCHOR BOLT (4) 3/8" X 10"	<b>STANDARD TEXTURED FINISH</b> <input type="checkbox"/> BLACK RAL-9005-T <input type="checkbox"/> WHITE RAL-9003-T <input type="checkbox"/> GREY RAL-7004-T <input type="checkbox"/> DRK BRONZE RAL-8019-T <input type="checkbox"/> GREEN RAL-6005-T  FOR SMOOTH FINISH REMOVE SUFFIX "T" (EXAMPLE: RAL-9500) SEE WEBSITE FOR ADDITIONAL COLORS	<input type="checkbox"/> HOUSE SIDE SHIELD 90° ..... <b>HS 90°</b> 135° ..... <b>HS 135°</b> 180° ..... <b>HS 180°</b>  <input type="checkbox"/> DUPLEX RECEPTACLE ..... <b>DUP</b> <input type="checkbox"/> GROUND FAULT RECEPTACLE ..... <b>GFI</b> <input type="checkbox"/> SINGLE FUSE (120V., 277V) ..... <b>SF</b> <input type="checkbox"/> DOUBLE FUSE (208V., 240V) ..... <b>DF</b> <input type="checkbox"/> WALL MOUNT ..... <b>WM</b>  <b>OPTIONAL HEIGHTS:</b> <input type="checkbox"/> 30" <input type="checkbox"/> 36"
	<b>OPTIONS:</b> <input type="checkbox"/> INTERNAL LOUVER <b>IL</b> <input type="checkbox"/> CAST ALUMINUM LOUVER <b>CL</b> <input type="checkbox"/> PRISMATIC GLASS TYPE V <b>PG-V</b> <input type="checkbox"/> PRISMATIC GLASS TYPE III <b>PG-III</b> <input type="checkbox"/> OPAL ACRYLIC <b>WA</b>	<p>*AVAILABLE WITH 8" BOLLARD ONLY</p>			