



DFL1014

[250 WATT MAX.]



SIDE VIEW



FRONT VIEW




SPECIFICATIONS:

- LUMINAIRE:** ONE PIECE UNITIZED HEAVY WALL ALUMINUM HOUSING. DURABLE CORROSION RESISTANT CAST ALUMINUM DOOR FRAME. LUMINAIRE YOKE PERMITS 180° FIELD ROTATION.
- OPTICS:** SMOOTH "COILZAK" REFLECTOR COMBINES WITH (3/16") TEMPERED GLASS LENS TO PRODUCE WIDE ILLUMINATION. LENS IS ENCLOSED IN DURABLE CAST ALUMINUM DOOR FRAME, AND SEALED WITH HIGH TEMPERATURE, WATER RESISTANT SILICONE SEALANT.
- GASKETING:** CLOSED CELL EPDM GASKETING COMPRESSED BETWEEN DOOR AND HOUSING SEALS OPTICAL CHAMBER.
- LAMP HOLDER:** MEDIUM OR MOGUL BASE PORCELAIN WITH LAMP LOCKING SHELL.
- LAMP:** [BY OTHERS]
- BALLAST:** HPF, CWA AUTOTRANSFORMER, -20° STARTING TEMPERATURE.
- BALLAST HOUSING:** HEAVY WALL, ALUMINUM CONSTRUCTION. BALLAST DOOR SEALED TO BALLAST ENCLOSURE WITH NEOPRENE GASKETING.
- FINISH:** POLYESTER POWDER COAT-STATE OF THE ART 20 PSI PRESSURE POWER WASH AT 140° TEMPERATURE INCORPORATES FOUR STEP IRON PHOSPHATE PROCESS TO CLEANSE AND PRETREAT THE METAL SURFACE FOR MAXIMUM PAINT ADHESION. ELECTROSTATICALLY APPLIED TEXTURED POLYESTER POWDER TOP COAT IS BAKED AT 400° TEMPERATURE FOR MAXIMUM HARDNESS AND EXTERIOR DURABILITY.



[250 WATT MAX.]

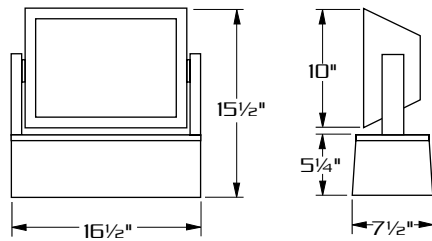

**SEPARATE BALLAST HOUSING
FOR EASY BALLAST ACCESS**

180° LUMINAIRE ROTATION.

ORDERING INFORMATION

MODEL NO. :	WATTAGE TYPE VOLTAGE	FINISH	OPTIONS		
DFL1014					
MODEL NO. :	LAMP			FINISH	OPTIONS
DFL1014	WATTAGE	TYPE	VOLTAGE	STANDARD TEXTURED FINISH	<input type="checkbox"/> SINGLE FUSE (120V., 277V)..... SF
	<input type="checkbox"/> 250	<input type="checkbox"/> HPS	<input type="checkbox"/> 120	<input type="checkbox"/> BLACK RAL-9005-T	<input type="checkbox"/> DOUBLE FUSE (208V., 240V)..... DF
	<input type="checkbox"/> 200	<input type="checkbox"/> MH	<input type="checkbox"/> 208	<input type="checkbox"/> WHITE RAL-9003-T	<input type="checkbox"/> PHOTO CELL + VOLTAGE (EXAMPLE)..... PC+V
	<input type="checkbox"/> 175	<input type="checkbox"/> MV	<input type="checkbox"/> 240	<input type="checkbox"/> GREY RAL-7004-T	
	<input type="checkbox"/> 150		<input type="checkbox"/> 277	<input type="checkbox"/> DRK BRONZE RAL-8019-T	
	<input type="checkbox"/> 100		<input type="checkbox"/> 480	<input type="checkbox"/> GREEN RAL-6005-T	
		<input type="checkbox"/> MT		FOR SMOOTH FINISH REMOVE SUFFIX "T" (EXAMPLE: RAL-9500)	
				SEE WEBSITE FOR ADDITIONAL COLORS	