



[250 WATT MAX.]



**SIDE VIEW**



**TOP VIEW**



E.P.A.= 1.57



WM



1



2-180



2-90



3-90



3-120



4-90

## SPECIFICATIONS

**HOUSING:** ONE PIECE HEAVY WALL SPUN ALUMINUM HOUSING. MOLDED WHITE TRANSLUSCENT ACRYLIC DOME WITH INTERNAL GLASS DIFFUSER PROVIDES SOFT UNIFORM UPLIGHT.

**LENS ASSEMBLY:** ONE PIECE HINGED HEAVY WALL DIE FORMED ALUMINUM DOOR FRAME SURROUNDS 3/16" CLEAR TEMPERED GLASS LENS. GLASS IS SEALED TO DOOR WITH HIGH TEMPERATURE SILICONE SEAL. CAPTIVE THUMB SCREW DISENGAGES LENS ASSEMBLY AND ACTIVATES ACCUHINGE™ HINGE TO ALLOW LENS ASSEMBLY TO HINGE AWAY FROM HOUSING FOR LUMINAIRE ACCESS WITHOUT THE USE OF TOOLS.

**OPTICS:** COMPUTER DESIGNED ONE PIECE SEMI SPECULAR HYDROFORMED REFLECTOR. COMBINES WITH CLEAR TEMPERED GLASS LENS TO PRODUCE A HIGHLY EFFICIENT, SHARP CUTOFF, IMPACT RESISTANT ACRYLIC DOME SURROUNDS INTERNAL OPAL GLASS DIFFUSER TO PROVIDE SOFT UNIFORM UPLIGHT.

**GASKETING:** CLOSED CELL EPDM GASKETING COMPRESSED BETWEEN DOOR AND HOUSING WORKS IN COMBINATION WITH ACCUHINGE™ HINGE TO PRESSURE SEAL OPTICAL CHAMBER.


**LAMP HOLDER:** MOGUL BASE PORCELAIN.

**LAMP:** (BY OTHERS)



**BALLAST:** H.P.F./C.W.A. AUTOTRANSFORMER, -20° STARTING TEMPERATURE. ELECTRICAL COMPONENTS ARE MOUNTED TO REMOVABLE TRAY.

**ARM:** HEAVY WALL CORROSION RESISTANT CAST ALUMINUM CONSTRUCTION. CONTOURED CAST ALUMINUM ARM HOUSES ELECTRICAL COMPONENTS AND HAS REMOVABLE GASKETED CAST ALUMINUM TOP FOR ACCESS TO ELECTRICAL COMPONENTS.


**FINISH:** POLYESTER POWDER COAT-STATE OF THE ART 20 PSI PRESSURE POWER WASH AT 140° TEMPERATURE INCORPORATES FOUR STEP IRON PHOSPHATE PROCESS TO CLEANSE AND PRETREAT THE METAL SURFACE FOR MAXIMUM PAINT ADHESION. ELECTROSTATICALLY APPLIED TEXTURED POLYESTER POWDER TOPCOAT IS BAKED AT 400° TEMPERATURE FOR MAXIMUM HARDNESS AND EXTERIOR DURABILITY.



**POLE DRILLING TEMPLATE**




**WALL MOUNT**

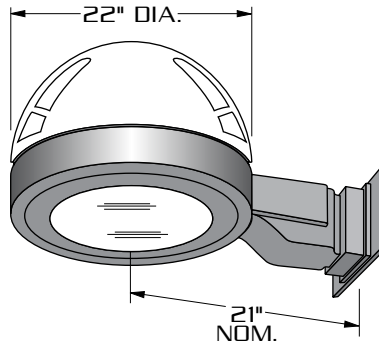


CORROSION RESISTANT CAST ALUMINUM CONSTRUCTION. ARM IS SUPPLIED WITH REMOVABLE CAST ALUMINUM TOP CAP FOR EASY ACCESS TO ELECTRICAL COMPONENTS.

**WALL PLATE**



**LAMP SIZE:  
70 - 250 WATT**

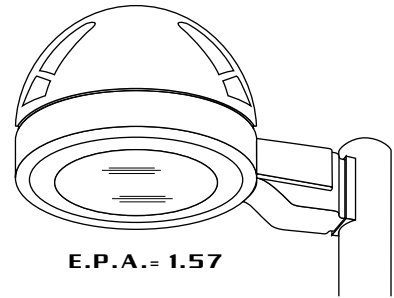

**DECORATIVE CAST ALUMINUM ARM. HOUSES ELECTRICAL COMPONENTS.**

**OPTICAL SYSTEMS ENCLOSED IN IMPACT RESISTANT TEMPERED GLASS DIFFUSER.**

**SOFT UNIFORM UPLIGHT.**

**ORDERING INFORMATION**

MODEL NO. : <b>GSB</b>	OPTICS	WATTAGE TYPE VOLTAGE	MOUNTING	FINISH	OPTIONS
MODEL NO. :	<b>OPTICS</b>	<b>LAMP</b>	<b>MOUNTING</b>	<b>FINISH</b>	<b>OPTIONS</b>
<b>GSB</b>	<input type="checkbox"/> TYPE III <b>III</b> . . . . . (hydroform)	<input type="checkbox"/> 250 <input type="checkbox"/> HPS <input type="checkbox"/> 120 <input type="checkbox"/> 200 <input type="checkbox"/> MH <input type="checkbox"/> 208 <input type="checkbox"/> 175 <input type="checkbox"/> MV <input type="checkbox"/> 240 <input type="checkbox"/> 150 <input type="checkbox"/> <input type="checkbox"/> 277 <input type="checkbox"/> 100 <input type="checkbox"/> <input type="checkbox"/> 480 <input type="checkbox"/> 75 <input type="checkbox"/> <input type="checkbox"/> MT <input type="checkbox"/> 70	<input type="checkbox"/> 1 . . . . . <input type="checkbox"/> WM . . . . .	STANDARD TEXTURED FINISH <input type="checkbox"/> BLACK RAL-9005-T <input type="checkbox"/> WHITE RAL-9003-T <input type="checkbox"/> GREY RAL-7004-T <input type="checkbox"/> DRK BRONZE RAL-8019-T <input type="checkbox"/> GREEN RAL-6005-T  FOR SMOOTH FINISH REMOVE SUFFIX "T" (EXAMPLE: RAL-9500)  SEE WEBSITE FOR ADDITIONAL COLORS	<input type="checkbox"/> CLEAR POLYCARBONATE DIFFUSER . . . . . <b>LEX</b> <input type="checkbox"/> HOUSE SIDE SHIELD . . . . . <b>HS</b> <input type="checkbox"/> PHOTO CELL + VOLTAGE (EXAMPLE: PC120V) . . . . . <b>PC+V</b> <input type="checkbox"/> TWIST LOCK PHOTO CELL+VOLTAGE (EXAMPLE TPC120V) . . . . . <b>TPC+V</b> <input type="checkbox"/> TWIST LOCK RECEPTACLE ONLY . . . . . <b>TPR</b> <input type="checkbox"/> SINGLE FUSE (120V. , 277V) . . . . . <b>SF</b> <input type="checkbox"/> DOUBLE FUSE (208V. , 240V) . . . . . <b>DF</b> <input type="checkbox"/> TAMPER PROOF . . . . . <b>TP</b>
	<input type="checkbox"/> TYPE IV (FORWARD THROW) <b>IV</b> . . . . . (segmented)	<input type="checkbox"/> TYPE V <b>V</b> . . . . .	<b>METAL HALIDE UNITS ONLY</b> USE ED28 LAMP FOR 400 W. USE MEDIUM BASE LAMP FOR 100 W.	SEE ARM SECTION FOR ADDITIONAL ARMS	