


(SPECIFY AS SUFFIX TO LUMINAIRE NO.)

## PRISMATIC POLYCARBONATE REFRACTOR PROVIDED WITH CAST ALUMINUM FITTER

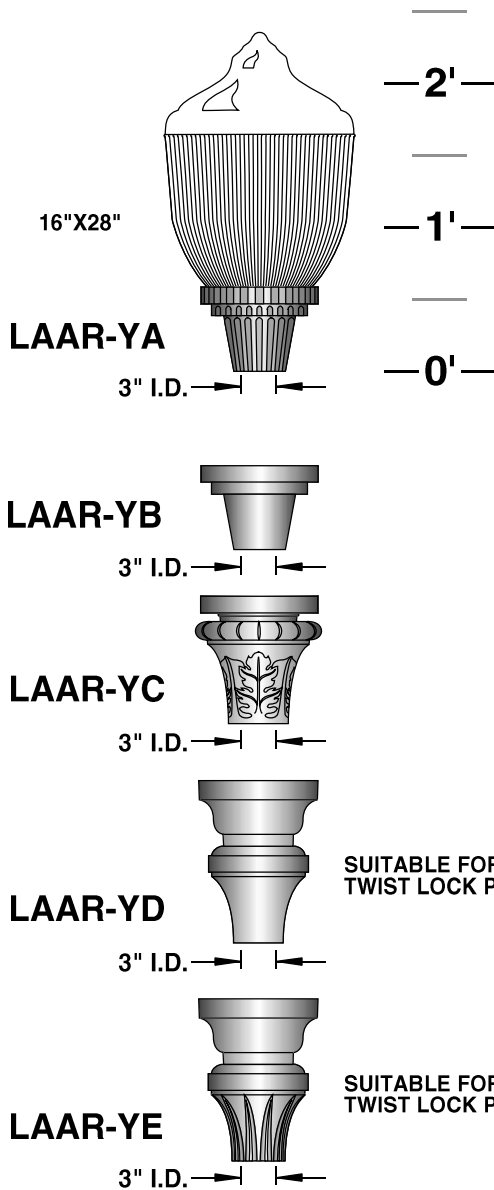

BALLASTS ARE H.P.F. / C.W.A. AUTOTRANSFORMER, -20° STARTING TEMPERATURE

METAL HALIDE	HIGH PRESSURE SODIUM	MERCURY VAPOR	INC. TO 200W.	FOR FLUOR. LAMPS CONSULT FACTORY
50W.	50W.	50W.		
70W.	70W.	75W.		
100W.	100W.	100W.		
175W.	150W.	175W.		
250W.	250W.	250W.		

YD" AND "YE" FITTERS ONLY

UL U.L. Listed for wet location

BRASS FINIAL




BF

ORNAMENTAL FINIAL



PF

HOUSE SIDE SHIELD  
90°, 135°, 180°



HS90°  
HS135°  
HS180°

STANDARD REFRACTOR:  
CLEAR PRISMATIC POLYCARBONATE.....CP

TYPE III LIGHT DISTRIBUTION.....III

TYPE V LIGHT DISTRIBUTION.....V

### OPTIONS:

CLEAR PRISMATIC ACRYLIC.....CA

TYPE III LIGHT DISTRIBUTION.....III

TYPE V LIGHT DISTRIBUTION.....V

REFLECTOR WITH UPLIGHT GLOW.....RDU

PHOTO CELL + VOLTAGE  
(EXAMPLE: PC120V).....PC+V

TWIST LOCK  
PHOTO CELL + VOLTAGE  
(EXAMPLE: TPC120V).....TPC+V  
(YD & YE FITTERS ONLY)

SINGLE FUSE (120V., 277V.).....SF


DOUBLE FUSE (208V., 240V., 480V.).....DF

SCALE: 1/4"=1'-0"


14  
13  
12  
11  
10  
9  
8  
7  
6  
5  
4  
3  
2  
1  
0



A




B



C




D




E


16  
15  
14  
13  
12  
11  
10  
9  
8  
7  
6  
5  
4  
3  
2  
1  
0

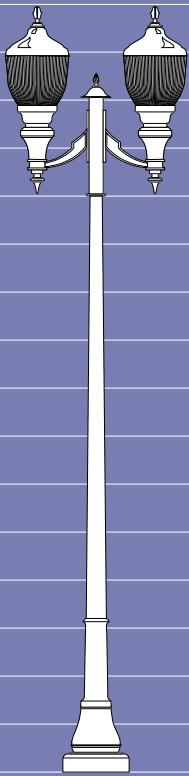


F

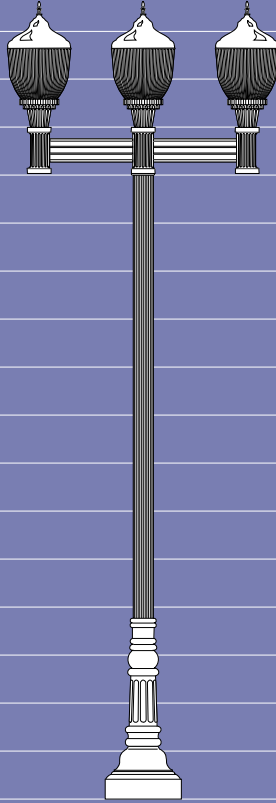

G

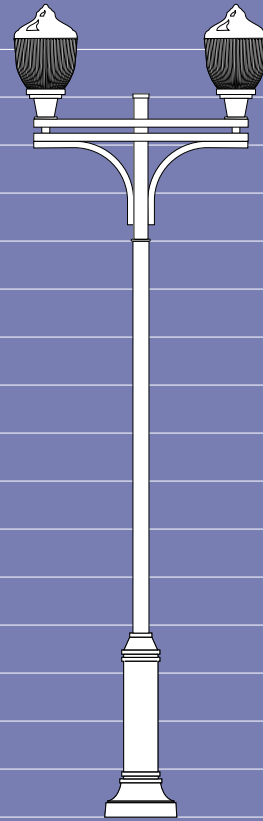

H



I

FT.

- A. 25-9040-12'/LAAR-YD-V-PF/PT/BALLAST/ACCESSORIES/FINISH
- B. 14-1050C-10"/LAAR-YC-III/PT/BALLAST/ACCESSORIES/FINISH
- C. 21-1070-11'/LAAR-YE-V-BF/PT/BALLAST/ACCESSORIES/FINISH
- D. 31-1030C-9'-6"/LAAR-YA-V/PT/BALLAST/ACCESSORIES/FINISH
- E. WS/LAAR-YB-III-PF/XAO-WM/BALLAST/ACCESSORIES/FINISH

- F. 85-1035T-12'/LAAR-YD-III-PF/XAZ-DN-2-180/BALLAST/ACCESSORIES/FINISH
- G. 12-1070-13'/LAAR-YA-III-BF/XAX-4-90/BALLAST/ACCESSORIES/FINISH
- H. 43-1040-11'/LAAR-YE-III/XBT-2-180/BALLAST/ACCESSORIES/FINISH
- I. WS/LAAR-YE-V/XAV-WM/BALLAST/ACCESSORIES/FINISH