


(SPECIFY AS SUFFIX TO LUMINAIRE NO.)

### PRISMATIC POLYCARBONATE REFRACTOR PROVIDED WITH CAST ALUMINUM FITTER

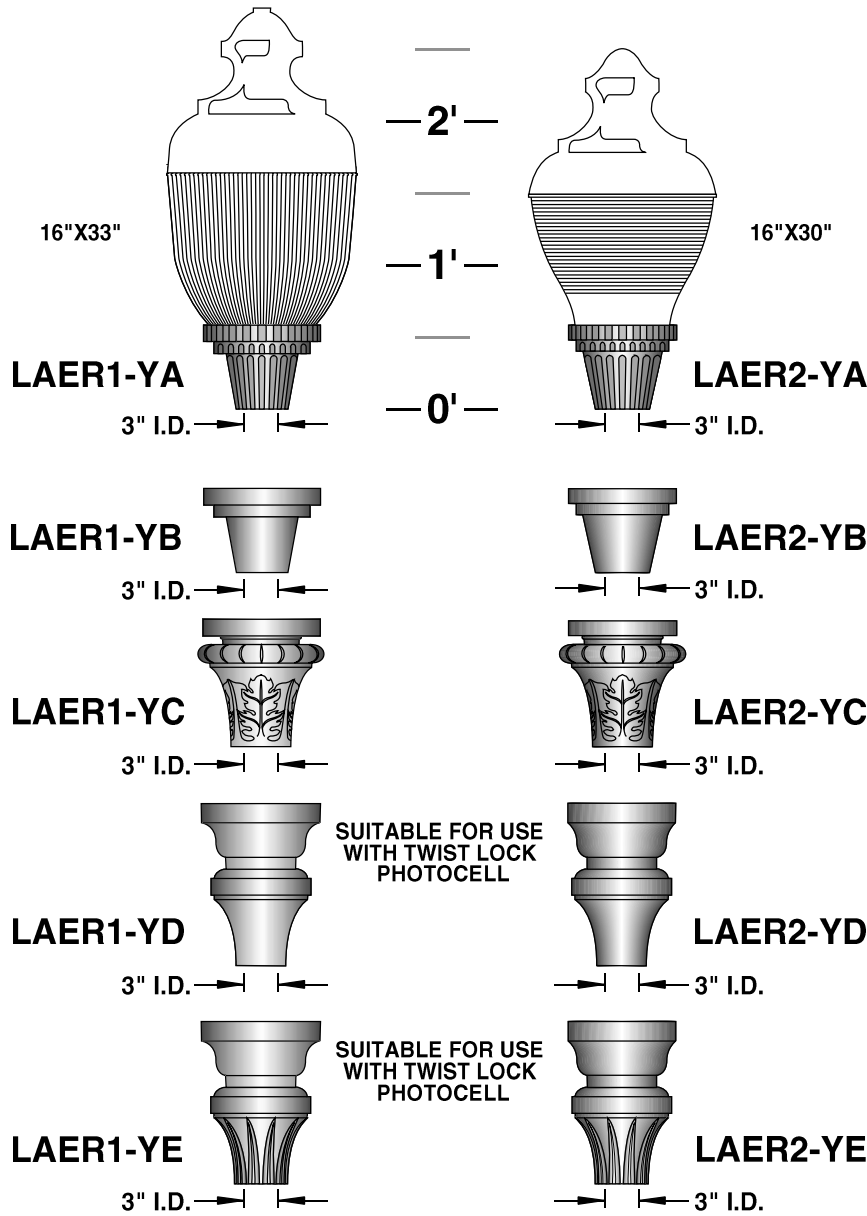


BALLASTS ARE H.P.F. / C.W.A. AUTOTRANSFORMER, -20° STARTING TEMPERATURE

		METAL HALIDE	HIGH PRESSURE SODIUM	MERCURY VAPOR	INC. TO 200W.	FOR FLUOR. LAMPS CONSULT FACTORY
LAER1	LAER2	50W.	50W.	50W.		
		70W.	70W.	75W.		
		100W.	100W.	100W.		
		175W.	150W.	175W.		
		250W.	250W.	250W.		



BRASS FINIAL  BF

ORNAMENTAL FINIAL  PF

HOUSE SIDE SHIELD  HS90°  
90°, 135°, 180° HS135°  
HS180°

STANDARD REFRACTOR: CLEAR PRISMATIC POLYCARBONATE.....CP

TYPE II LIGHT DISTRIBUTION.....II (LAER2 ONLY)

TYPE III LIGHT DISTRIBUTION.....III (LAER1 ONLY)

TYPE V LIGHT DISTRIBUTION.....V

OPTIONS: CLEAR PRISMATIC ACRYLIC.....CA

TYPE II LIGHT DISTRIBUTION.....II (LAER2 ONLY)

TYPE III LIGHT DISTRIBUTION.....III (LAER1 ONLY)

TYPE V LIGHT DISTRIBUTION.....V

REFLECTOR WITH UPLIGHT GLOW.....RDU

PHOTO CELL + VOLTAGE (EXAMPLE: PC120V).....PC+V

TWIST LOCK PHOTO CELL + VOLTAGE (EXAMPLE: TPC120V).....TPC+V (YD & YE FITTERS ONLY)

SINGLE FUSE (120V., 277V.).....SF

DOUBLE FUSE (208V., 240V., 480V.).....DF

SCALE: 1/4"=1'-0"


14  
13  
12  
11  
10  
9  
8  
7  
6  
5  
4  
3  
2  
1  
0



A




B



C




D




E


16  
15  
14  
13  
12  
11  
10  
9  
8  
7  
6  
5  
4  
3  
2  
1  
0

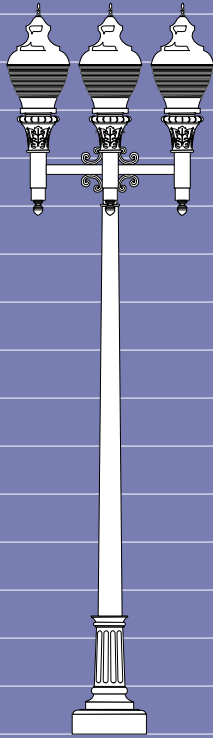


F

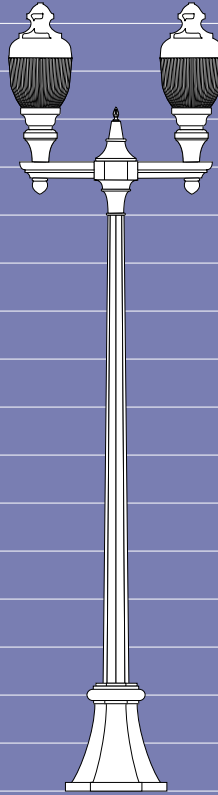

G

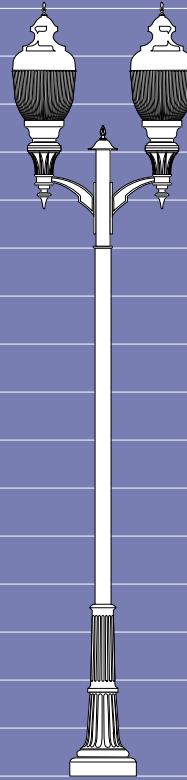

H



I

FT.

- A. 43-1030T-12/LAER2-YD-V/PT/BALLAST/ACCESSORIES/FINISH
- B. 31-9040-10/LAER1-YB-III/PT/BALLAST/ACCESSORIES/FINISH
- C. 16-1060-11/LAER2-YA-V-BF/PT/BALLAST/ACCESSORIES/FINISH
- D. 75-1030C-10/LAER1-YE-V-BF/PT/BALLAST/ACCESSORIES/FINISH
- E. WS/LAER2-YD-III-PF/XAO-WM/BALLAST/ACCESSORIES/FINISH

- F. 13-1046T-11/LAER2-YC-III-BF/XAJ-4-90/BALLAST/ACCESSORIES/FINISH
- G. 22-1080C-12/LAER1-YD-III/XBW-2-180/BALLAST/ACCESSORIES/FINISH
- H. 3-1040-11/LAER1-YE-III-BF/XAZ-UP-2-180/BALLAST/ACCESSORIES/FINISH
- I. WS/LAER1-YB-V/XBT-WM/BALLAST/ACCESSORIES/FINISH