

SOLID STATE AREA LIGHTING

LCK SERIES-LED

SPECIFICATIONS

LUMINAIRE

High Impact clear polycarbonate diffusing lenses provided with durable corrosion resistant cast aluminum housing. Top is hinged for access. Luminaire base has 3" I.D. opening for tenon. All hardware is stainless steel.

LED POWER ARRAY™

Three-dimensional array of individual LED Tubes fastened to a retaining plate. Each LED Tube consists of circuit board populated with a multiple of LED's and is mechanically fastened to a radial aluminum heat sink. An acrylic Lens and end cap protects the LED Tube's internal components.

ANGLED POWER ARRAY™: Micro-Reflectors mounted around each LED control the raw light output. LED Tubes are uniquely aimed horizontally and vertically and combined to produce highly efficient IES Distribution Types II, III, IV and V. Used in conjunction with a clear patterned diffusing lenses.

VERTICAL POWER ARRAY™ WITH GLASS REFRACTOR: LED Tubes are aligned vertically and arranged radially to produce an even raw light distribution that simulates standard light sources. Array is secured within a 6" Prismatic Glass Refractor which provides the optical control. Used in conjunction with clear smooth or clear patterned diffusing lenses.

VERTICAL POWER ARRAY™: LED Tubes are aligned vertically and arranged radially to produce an even raw light distribution that simulates standard light sources. Produces a minimal glare, symmetric diffuse light distribution. Used in conjunction with opal diffusing lenses.

LED EMITTERS

High Output LED's are driven at 350mA for nominal 1 Watt output each. LED's are available in standard Neutral White (4000K), or optional Cool White (5000K) or Warm White (3000K). Consult Factory for other LED options.

LED DRIVER



UL and CUL recognized High Power Factor, Constant Current LED drivers operate on input voltages from 120-277VAC, 50/60hz. Consult Factory for 347-480VAC. Driver is mechanically fastened to a retaining bracket. Main power quick disconnect provided. Driver has a minimum 4KV of internal surge protection, 10KV & 20KV Surge Protector optional. Dimming and High-Low Driver options available.

FINISH

Polyester powder coat incorporates four step iron phosphate process to pretreat metal surface for maximum adhesion. Top coat is baked at 400°F for maximum hardness and exterior durability.

PROJECT NAME: _____



PROJECT TYPE: _____



LCK-YK

PATENT PENDING

FIXTURE	A	B
LCK1-YK	20.5" 521mm	42" 1067mm
LCK2-YK	17" 432mm	37" 940mm



LCK1-YJ

PATENT PENDING




2013216


LCK SERIES - LED

S P E C I F I C A T I O N S

WALL MOUNT

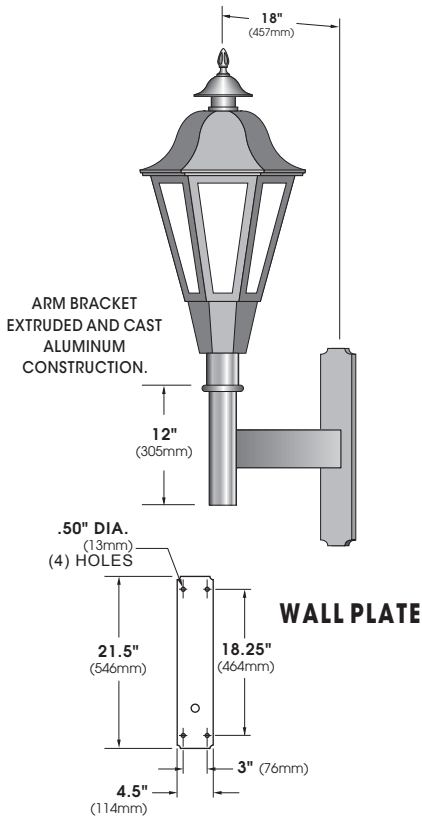

LED POWER ARRAY™ MODULES

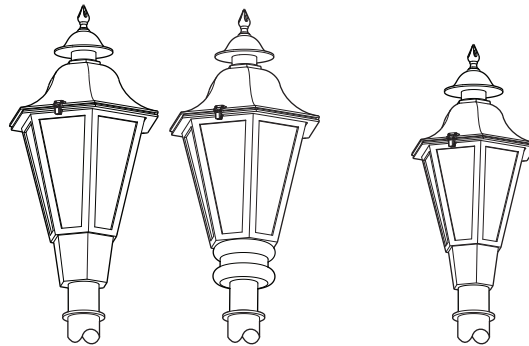

LCK1-YK-LED E.P.A.= 2.00
LCK1-YJ-LED E.P.A.= 2.00

ANGLED ARRAY
Available in:
10 Array 80 LED Max.

**GLASS REFRACTOR w/
VERTICAL ARRAY**
Available in:
6 Array 36 LED Max.


VERTICAL ARRAY
Available in:
8 Array 64 LED Max.
10 Array 80 LED Max.

LCK2-YK-LED2 E.P.A.= 1.42


ANGLED ARRAY
Available in:
8 Array 48 LED Max.

**GLASS REFRACTOR w/
VERTICAL ARRAY**
Available in:
6 Array 36 LED Max.


VERTICAL ARRAY
Available in:
6 Array 48 LED Max.
8 Array 64 LED Max.



APA - Angled Array
Base mount



GRV - Glass Refractor
w/ Vertical Array
Base mount



VPA - Vertical Array
Base mount

(Specifications subject to change without prior notice.)

PATENT PENDING

O R D E R I N G I N F O R M A T I O N

LUMINAIRE	OPTICS	# of LED's	COLOR	VOLTAGE	MOUNTING	FINISH	OPTIONS
LUMINAIRE	OPTICS	LED			MOUNTING	FINISH	OPTIONS
<input type="checkbox"/> LCK1-YK-LED	<input type="checkbox"/> APA - II	No. LEDs	COLOR		ARM MOUNT	STANDARD TEXTURED FINISH	LENS OPTIONS:
<input type="checkbox"/> LCK1-YJ-LED	<input type="checkbox"/> APA - III	LCK1	LCK2	<input type="checkbox"/> NW (4000K)* *STANDARD	<input type="checkbox"/> 1	<input type="checkbox"/> BLACK RAL-9005-T	<input type="checkbox"/> CLEAR PATTERNED POLYCARBONATE ... CPP (STANDARD LENS)
<input type="checkbox"/> LCK2-YK-LED	<input type="checkbox"/> APA - IV	<input type="checkbox"/> 80LED (89 Watts)	<input type="checkbox"/> 48LED (53 Watts)	<input type="checkbox"/> CW (5000K)	<input type="checkbox"/> 2-180	<input type="checkbox"/> WHITE RAL-9003-T	<input type="checkbox"/> CLEAR SMOOTH POLYCARBONATE ... CP
	<input type="checkbox"/> APA - V	<input type="checkbox"/> 60LED (67 Watts)	<input type="checkbox"/> 32LED (36 Watts)	<input type="checkbox"/> WW (3000K)	<input type="checkbox"/> 2-90	<input type="checkbox"/> GREY RAL-7004-T	<input type="checkbox"/> OPAL SMOOTH ACRYLIC ... WA
		<input type="checkbox"/> 40LED (45 Watts)		OTHER LED COLORS AVAILABLE CONSULT FACTORY	<input type="checkbox"/> 3-90	<input type="checkbox"/> DARK BRONZE RAL-8019-T	<input type="checkbox"/> CLEAR PATTERNED ACRYLIC ... CPA
	GLASS REFRACTOR (CLEAR PATTERNED OR CLEAR SMOOTH LENS)	LCK1		VOLTAGE	<input type="checkbox"/> 3-120	<input type="checkbox"/> GREEN RAL-6005-T	<input type="checkbox"/> CLEAR SMOOTH ACRYLIC ... CA
	<input type="checkbox"/> GRV - III	<input type="checkbox"/> 36LED (41 Watts)	<input type="checkbox"/> 36LED (41 Watts)	<input type="checkbox"/> 120	<input type="checkbox"/> 4-90		<input type="checkbox"/> OPAL SMOOTH POLYCARBONATE ... WP
	<input type="checkbox"/> GRV - V	LCK2		<input type="checkbox"/> 208			<input type="checkbox"/> HOUSE SIDE SHIELD ... HS
		<input type="checkbox"/> 80LED (89 Watts)	<input type="checkbox"/> 64LED (72 Watts)	<input type="checkbox"/> 240	WALL MOUNT		<input type="checkbox"/> DIMMABLE DRIVER(S) (0-10V) ... DIM
	VERTICAL POWER ARRAY (OPAL LENS)	<input type="checkbox"/> 64LED (72 Watts)	<input type="checkbox"/> 48LED (53 Watts)	<input type="checkbox"/> 277	<input type="checkbox"/> WM		<input type="checkbox"/> HIGH-LOW DIMMING FOR HARDWIRED SWITCHING OR NON-INTEGRATED MOTION SENSOR ... HLSW
	<input type="checkbox"/> VPA - SYM	<input type="checkbox"/> 48LED (53 Watts)	<input type="checkbox"/> 36LED (41 Watts)	<input type="checkbox"/> 347	POST TOP		<input type="checkbox"/> PHOTO CELL + VOLTAGE (EXAMPLE: PC120V) ... PC+V
		LCK2		<input type="checkbox"/> 480	<input type="checkbox"/> PT		<input type="checkbox"/> 10KV SURGE PROTECTOR ... 10SP
		<input type="checkbox"/> 80LED (89 Watts)	<input type="checkbox"/> 64LED (72 Watts)				<input type="checkbox"/> 20KV SURGE PROTECTOR (277V & 480V Only) ... 20SP