



[400 WATT MAX.]

LG

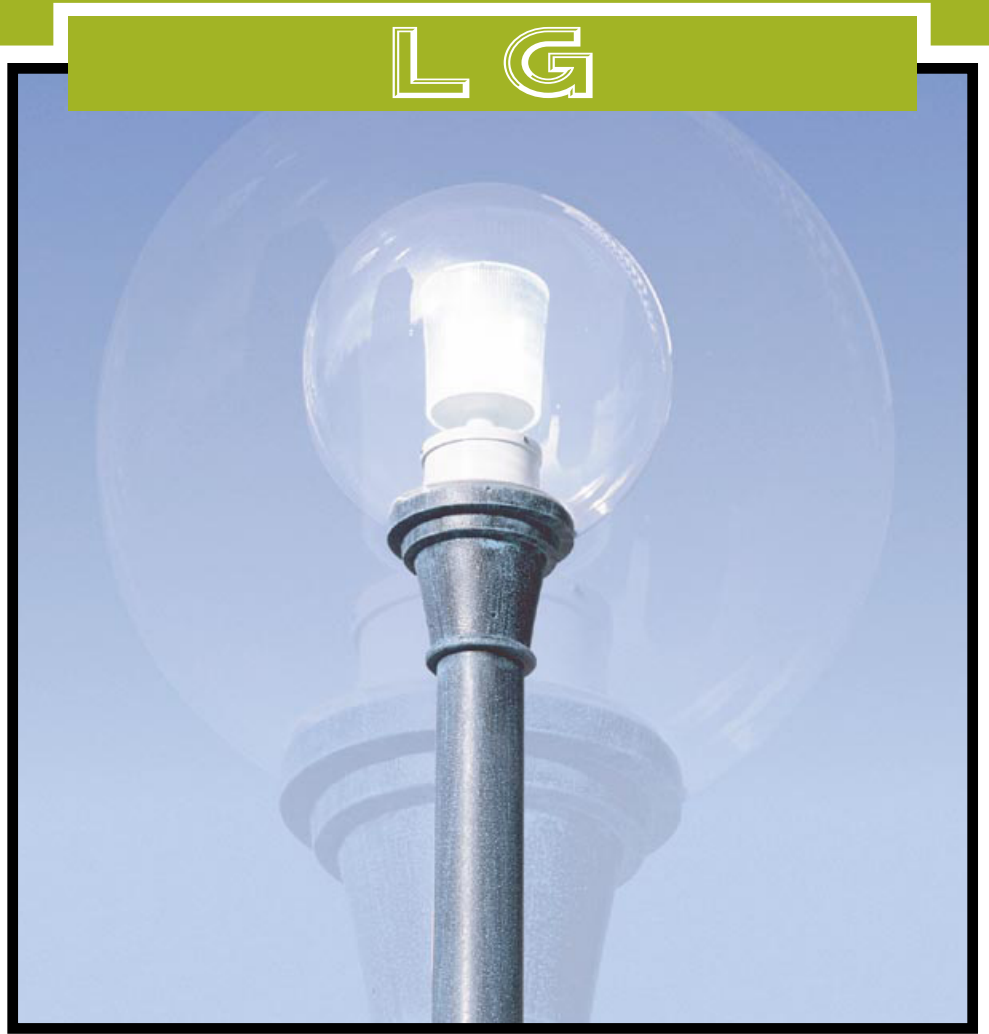

CAT. NO.	DIA.	HEIGHT	E.P.A.
<b>L614</b>	14"	19 1/2"	.88
<b>L616</b>	16"	22"	1.11
<b>L618</b>	18"	24"	1.37
<b>L622</b>	22"	28 1/2"	1.98
<b>L624</b>	24"	33"	2.33



### SPECIFICATIONS

**HOUSING:** ONE PIECE DURABLE, CORROSION RESISTANT, CAST ALUMINUM CONSTRUCTION.

**OPTIONS:** **L614**-14" DIA. SPHERE, **L616**-16" DIA. SPHERE, **L618**-18" DIA. SPHERE, **L622**-22" DIA. SPHERE, **L624**-24" DIA. SPHERE. ONE PIECE SEAMLESS OPAL ACRYLIC SPHERE.  
**OPTIONS:** ONE PIECE SEAMLESS CLEAR ACRYLIC, SURROUNDS TYPE II OR TYPE V REFRACTOR.

**LAMP HOLDER:** MEDIUM OR MOGUL BASE PORCELAIN.

**LAMP:** (BY OTHERS)


**BALLAST:** H.P.F./C.W.A. AUTOTRANSFORMER, -20° STARTING TEMPERATURE. ELECTRICAL COMPONENTS ARE MOUNTED TO A REMOVABLE BALLAST TRAY. BALLAST IS EQUIPPED WITH FACTORY INSTALLED QUICK DISCONNECT PLUG.

**MOUNTING:** HEAVY WALL EXTRUDED ALUMINUM CONSTRUCTION.


**FINISH:** POLYESTER POWDER COAT-STATE OF THE ART 20 PSI PRESSURE POWER WASH AT 140° TEMPERATURE INCORPORATES FOUR STEP IRON PHOSPHATE PROCESS TO CLEANSE AND PRETREAT THE METAL SURFACE FOR MAXIMUM PAINT ADHESION. ELECTROSTATICALLY APPLIED TEXTURED POLYESTER POWDER TOPCOAT IS BAKED AT 400° TEMPERATURE FOR MAXIMUM HARDNESS AND EXTERIOR DURABILITY.



**LUMINAIRE ACCESSORIES AND FITTER OPTIONS**

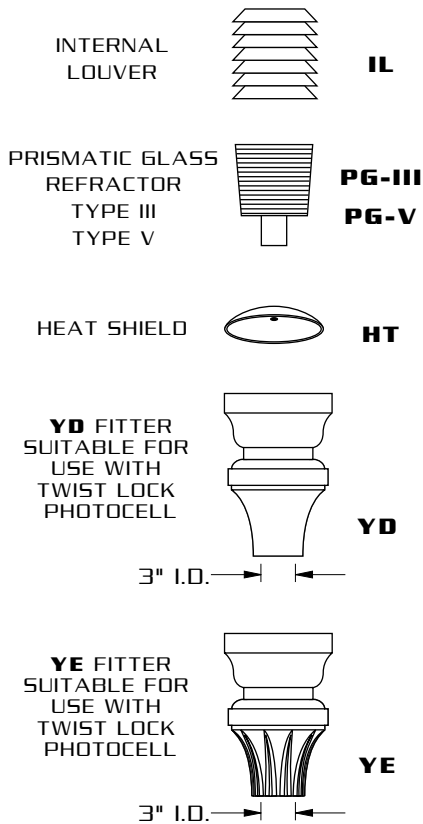


**WALL MOUNT**

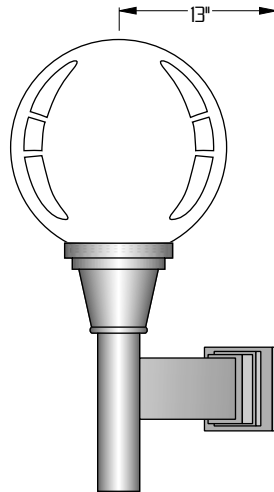


EXTRUDED ALUMINUM ARM AND CAST ALUMINUM WALL BRACKET ASSEMBLY PROVIDED WITH BUILT IN GASKETED WIRE ACCESS FOR FIXTURE/SUPPLY WIRE CONNECTION.

**WALL PLATE**



**LAMP SIZE:**

<b>L614</b>	100 WATT. MAX.
<b>L616</b>	100 WATT. MAX.
<b>L618</b>	175 WATT. MAX.
<b>L622</b>	250 WATT. MAX.
<b>L624</b>	400 WATT. MAX.



**LG**

CAT. NO.	GLOBE	E.P.A.
<b>L614</b>	14" DIA.	.88
<b>L616</b>	16" DIA.	1.11
<b>L618</b>	18" DIA.	1.37
<b>L622</b>	22" DIA.	1.98
<b>L624</b>	24" DIA.	2.33

**ALL CAST ALUMINUM CONSTRUCTION.**

**SEAMLESS ACRYLIC OR POLYCARBONATE.**

**ORDERING INFORMATION**

MODEL NO.:	OPTICS	WATTAGE TYPE VOLTAGE	MOUNTING	FINISH	OPTIONS
<b>LG</b>					
MODEL NO.:	OPTICS	LAMP	MOUNTING	FINISH	OPTIONS
<b>L G</b>	<b>STANDARD:</b> <input type="checkbox"/> OPAL ACRYLIC..... <b>WA</b> <b>DIFFUSER OPTIONS:</b> <input type="checkbox"/> CLEAR ACRYLIC..... <b>CA</b> <input type="checkbox"/> CLEAR POLYCARBONATE.. <b>CP</b> <input type="checkbox"/> OPAL POLYCARBONATE.. <b>WP</b> <b>PRISMATIC GLASS REFRACTOR</b> <input type="checkbox"/> TYPE III..... <b>PG-III</b> <input type="checkbox"/> TYPE V..... <b>PG-V</b> SPECIFY AFTER DIFFUSER OPTION (EX: CA-PG-III) <input type="checkbox"/> INTERNAL LOUVER.. <b>IL</b> SPECIFY AFTER DIFFUSER OPTION (EX: CA-IL) <input type="checkbox"/> WIDE ANGLE LOUVER..... <b>OPT</b> (RCGD22 ONLY) SPECIFY AFTER DIFFUSER OPTION (EX: CP-OPT) <input type="checkbox"/> HEAT SHIELD..... <b>HT</b>	<b>WATTAGE TYPE VOLTAGE</b> <input type="checkbox"/> 400 <input type="checkbox"/> HPS <input type="checkbox"/> 120 <input type="checkbox"/> 250 <input type="checkbox"/> MH <input type="checkbox"/> 208 <input type="checkbox"/> 175 <input type="checkbox"/> MV <input type="checkbox"/> 240 <input type="checkbox"/> 150 <input type="checkbox"/> 277 <input type="checkbox"/> 100 <input type="checkbox"/> 480 <input type="checkbox"/> 75 <input type="checkbox"/> MT <input type="checkbox"/> 70 <input type="checkbox"/> 50 (400 W. BALLAST REQUIRES FITTER YD OR YE)	<input type="checkbox"/> <b>PT</b> ..... ● <input type="checkbox"/> <b>WM</b> ..... ●	<b>STANDARD TEXTURED FINISH</b> <input type="checkbox"/> BLACK RAL-9005-T <input type="checkbox"/> WHITE RAL-9003-T <input type="checkbox"/> GREY RAL-7004-T <input type="checkbox"/> DRK BRONZE RAL-8019-T <input type="checkbox"/> GREEN RAL-6005-T  FOR SMOOTH FINISH REMOVE SUFFIX "T" (EXAMPLE: RAL-9500)  SEE WEBSITE FOR ADDITIONAL COLORS	<input type="checkbox"/> YD FITTER..... <b>YD</b> <input type="checkbox"/> YE FITTER..... <b>YE</b> <input type="checkbox"/> HEAT SHIELD..... <b>HT</b> <input type="checkbox"/> HOUSE SIDE SHIELD 90°..... <b>HS 90°</b> 135°..... <b>HS 135°</b> 180°..... <b>HS 180°</b> <input type="checkbox"/> PHOTO CELL + VOLTAGE (EXAMPLE: PC120V)..... <b>PC+V</b> <input type="checkbox"/> SINGLE FUSE (120V., 277V)..... <b>SF</b> <input type="checkbox"/> DOUBLE FUSE (208V., 240V)..... <b>DF</b>
				SEE ARM SECTION FOR ADDITIONAL ARMS	