



# LUMENATOR-F

[400 WATT MAX.]



**SIDE VIEW**



**FRONT VIEW**



## SPECIFICATIONS

**HOUSING:** PRECISE. CORROSION RESISTANT RADIUSED CAST ALUMINUM CONSTRUCTION.

**LENS ASS'Y:** PRECISE. CORROSION RESISTANT CAST ALUMINUM DOOR FRAME SURROUNDS 3/16" CLEAR TEMPERED GLASS LENS. GLASS IS SEALED TO DOOR WITH HIGH TEMPERATURE SILICONE SEAL.

**OPTICS:** COMPUTER DESIGNED SEMI SPECULAR SEGMENTED REFLECTOR COMBINES WITH CLEAR TEMPERED LENS TO PRODUCE WIDE LIGHT DISTRIBUTION WITH SHARP CUTOFF.

**GASKETING:** CLOSED CELL EPDM GASKETING COMPRESSED BETWEEN DOOR AND HOUSING SEALS OPTICAL CHAMBER.


**LAMP HOLDER:** MOGUL BASE PORCELAIN.

**LAMP:** [BY OTHERS]



**BALLAST:** H.P.F./C.W.A. AUTOTRANSFORMER. -20° STARTING TEMPERATURE.

**FINISH:** POLYESTER POWDER COAT-STATE OF THE ART 20 PSI PRESSURE POWER WASH AT 140° TEMPERATURE INCORPORATES FOUR STEP IRON PHOSPHATE PROCESS TO CLEANSE AND PRETREAT THE METAL SURFACE FOR MAXIMUM PAINT ADHESION. ELECTROSTATICALLY APPLIED TEXTURED POLYESTER POWDER TOP COAT IS BAKED AT 400° TEMPERATURE FOR MAXIMUM HARDNESS AND EXTERIOR DURABILITY.



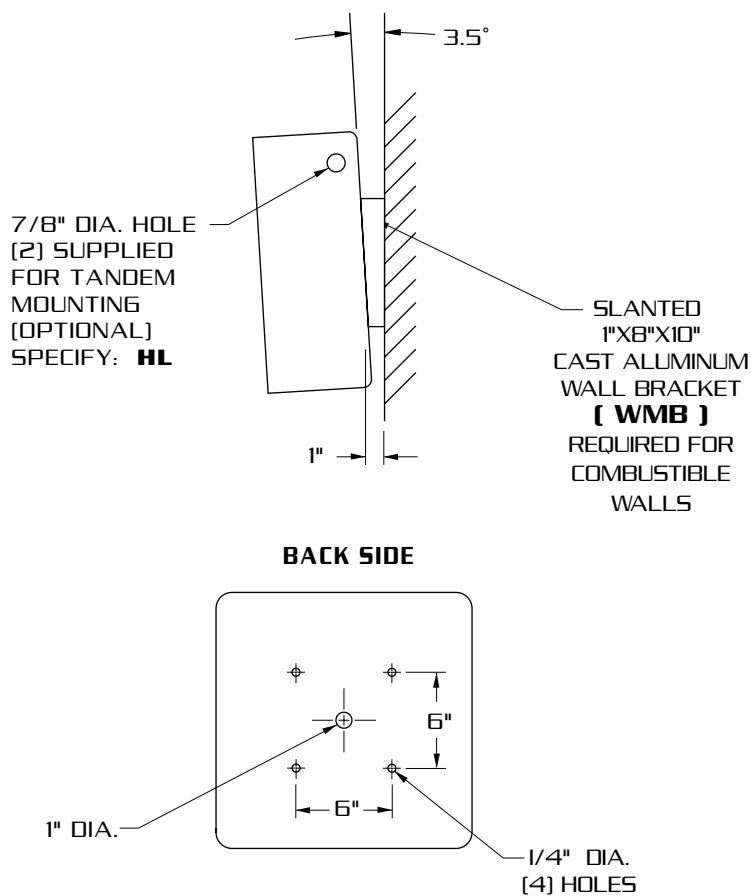

**LAMP SIZE:  
100 - 400 WATT**




**PRECISE COMPUTER DESIGNED,  
SEGMENTED SHARP CUTOFF  
OPTICS.**

**IMPACT RESISTANT TEMPERED  
GLASS LENS.**

**RADIUSED CORNER HOUSING  
DESIGN.**

## ORDERING INFORMATION

MODEL NO. : <b>LUM-F</b>	OPTICS	WATTAGE TYPE VOLTAGE	FINISH	OPTIONS
<b>LUM-F</b>	<b>OPTICS</b>	<b>LAMP</b>	<b>FINISH</b>	<b>OPTIONS</b>
	<input type="checkbox"/> TYPE IV (FORWARD THROW) IV..... 	<b>WATTAGE TYPE VOLTAGE</b> <input type="checkbox"/> 400 <input type="checkbox"/> HPS <input type="checkbox"/> 120 <input type="checkbox"/> 250 <input type="checkbox"/> MH <input type="checkbox"/> 208 <input type="checkbox"/> 200 <input type="checkbox"/> MV <input type="checkbox"/> 240 <input type="checkbox"/> 175 <input type="checkbox"/> 277 <input type="checkbox"/> 150 <input type="checkbox"/> 480 <input type="checkbox"/> 100 <input type="checkbox"/> MT  <b>METAL HALIDE UNITS ONLY</b> USE ED28 LAMP FOR 400 W. USE MEDIUM BASE LAMP FOR 100 W.	<b>STANDARD TEXTURED FINISH</b> <input type="checkbox"/> BLACK RAL-9005-T <input type="checkbox"/> WHITE RAL-9003-T <input type="checkbox"/> GREY RAL-7004-T <input type="checkbox"/> DRK BRONZE RAL-8019-T <input type="checkbox"/> GREEN RAL-6005-T  FOR SMOOTH FINISH REMOVE SUFFIX "T" (EXAMPLE: RAL-9500)  SEE WEBSITE FOR ADDITIONAL COLORS	<input type="checkbox"/> CLEAR POLYCARBONATE DIFFUSER ..... <b>LEX</b> <input type="checkbox"/> SINGLE FUSED (120V., 277V) ..... <b>SF</b> <input type="checkbox"/> DOUBLE FUSE (208V., 240V) ..... <b>DF</b> <input type="checkbox"/> QUARTZ RESTRIKE ..... <b>QTZ</b> <input type="checkbox"/> PHOTO CELL + VOLTAGE (EXAMPLE: PC120V) ..... <b>PC+V</b> <input type="checkbox"/> TWIST LOCK PHOTO CELL+VOLTAGE (EXAMPLE TPC120V) ..... <b>TPC+V</b> <input type="checkbox"/> TWIST LOCK RECEPTACLE ONLY ..... <b>TPR</b> <input type="checkbox"/> CAST ALUMINUM WALL BRACKET ..... <b>WMB</b> <input type="checkbox"/> TAMPER PROOF HARDWARE ..... <b>TP</b> <input type="checkbox"/> 7/8 DIA. HOLE ..... <b>HL</b>