



MURALUX-T®


[175 WATT MAX.]




SIDE VIEW



FRONT VIEW



TOP VIEW

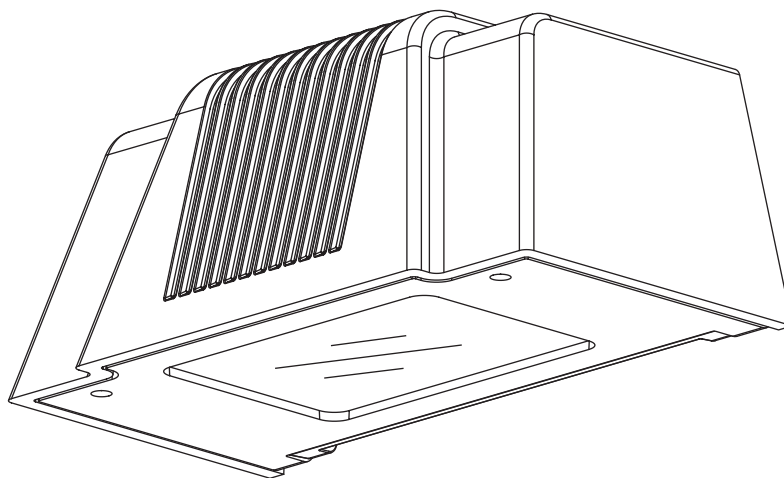

EPA=0.78



SPECIFICATIONS

HOUSING: PRECISE CAST ALUMINUM CONSTRUCTION. RIBBED HOUSING DETAILS AND FINNED BACKPLATE DISSIPATE HEAT FROM LUMINAIRE INTERIOR TO INCREASE BOTH BALLAST AND LAMP LIFE.

LENS ASS'Y: PRECISE, ONE PIECE CAST ALUMINUM CONSTRUCTION. DOOR FRAME ENCASES 3/16" CLEAR TEMPERED GLASS LENS SEALED TO DOOR FRAME WITH HIGH TEMPERATURE EPDM GASKET TO COMPLETELY SEAL DOOR FRAME FROM CONTAMINANTS.

OPTICS: COMPUTER DESIGNED PRECISION SPECULAR SEGMENTED OPTICS PROVIDE FULL CUTOFF DISTRIBUTIONS AND ARE DARK-SKY COMPLIANT WHEN USED WITHOUT UPLIGHT OPTIONS. WALL-SIDE GLARE SHIELD OPTION MINIMIZES WALL BRIGHTNESS DUE TO LAMP PROXIMITY.

UPLIGHT: OPTIONAL BEAM OR ACCENT/FLOOD UPLIGHT. BEAM OPTION AVAILABLE FOR H.I.D. LAMPS ONLY (SEE OPTIONS)

GASKETING: CLOSED CELL EPDM GASKETING COMPRESSED BETWEEN DOOR AND HOUSING.

LAMP HOLDER: MEDIUM BASE PORCELAIN OR G12 PORCELAIN FOR H.I.D. LAMPS. FLUORESCENT LAMPHOLDER VARIES. LAMPHOLDER EQUIPPED WITH FACTORY INSTALLED QUICK DISCONNECT PLUG.

LAMP: (BY OTHERS)


BALLAST: **HID-** H.P.F./C.W.A. AUTOTRANSFORMER. -20° STARTING TEMPERATURE.
CFL- FLUORESCENT RAPID START H.P.F. -20° STARTING TEMPERATURE.

MOUNTING PLATE: HEAVY GAUGE ALUMINUM WALL MOUNTING PLATE IS PROVIDED FOR ATTACHMENT TO WALL AND JUNCTION BOX. FIXTURE IS SECURED TO PLATE USING INTEGRATED STAINLESS STEEL CAP SCREWS.


HARDWARE: ALL EXPOSED HARDWARE IS STAINLESS STEEL.

FINISH: POLYESTER POWDER COAT-STATE OF THE ART 20 PSI PRESSURE POWER WASH AT 140° TEMPERATURE INCORPORATES FOUR STEP IRON PHOSPHATE PROCESS TO CLEANSE AND PRETREAT THE METAL SURFACE FOR MAXIMUM PAINT ADHESION. ELECTROSTATICALLY APPLIED TEXTURED POLYESTER POWDER TOP COAT IS BAKED AT 400° TEMPERATURE FOR MAXIMUM HARDNESS AND EXTERIOR DURABILITY.







HR FULL-CUTOFF OPTICS




BEAM UP OPTION-BU




ACCENT/FLOOD UP OPTION-AU

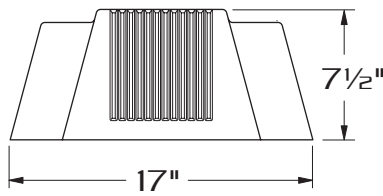

WALL MOUNTING BRACKET

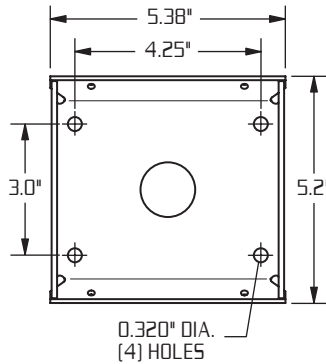

LAMP SIZE: 175 WATT MAX

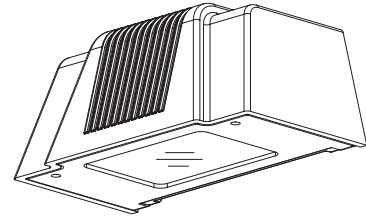

EPA=0.78

PRECISE CAST ALUMINUM HOUSING AND DOOR FRAME.

OPTICAL SYSTEM ENCLOSED IN IMPACT RESISTANT TEMPERED GLASS LENS.





THREE LIGHT DISTRIBUTIONS AVAILABLE.

FULL-CUTOFF OPTICS FOR DARK-SKY COMPLIANCE.

BEAM OR ACCENT UPLIGHTING OPTIONS.

ORDERING INFORMATION

MODEL NO. : MLXT	OPTICS	WATTAGE	TYPE	VOLTAGE	FINISH	OPTIONS
---------------------	--------	---------	------	---------	--------	---------

MODEL NO. : MLXT	OPTICS	LAMP	FINISH	OPTIONS																											
	HID OPTICS <input type="checkbox"/> TYPE II HR-II  (segmented) <input type="checkbox"/> TYPE III HR-III  (segmented) <input type="checkbox"/> TYPE IV HR-IV  (segmented) CFL OPTICS <input type="checkbox"/> TYPE IV FT-CFL  (segmented)	<table border="0"> <tr> <td><input type="checkbox"/> 175</td> <td><input type="checkbox"/> HPS</td> <td><input type="checkbox"/> 120</td> </tr> <tr> <td><input type="checkbox"/> 150</td> <td><input type="checkbox"/> MH</td> <td><input type="checkbox"/> 208</td> </tr> <tr> <td><input type="checkbox"/> 100</td> <td><input type="checkbox"/> PSMH</td> <td><input type="checkbox"/> 240</td> </tr> <tr> <td><input type="checkbox"/> 85</td> <td><input type="checkbox"/> SEMH</td> <td><input type="checkbox"/> 277</td> </tr> <tr> <td><input type="checkbox"/> 70</td> <td><input type="checkbox"/> CFL</td> <td><input type="checkbox"/> 480</td> </tr> <tr> <td><input type="checkbox"/> 60</td> <td></td> <td><input type="checkbox"/> MT</td> </tr> <tr> <td><input type="checkbox"/> 42</td> <td></td> <td><input type="checkbox"/> OTHER (SPECIFY)</td> </tr> <tr> <td><input type="checkbox"/> 35</td> <td></td> <td></td> </tr> <tr> <td><input type="checkbox"/> OTHER (SPECIFY)</td> <td></td> <td></td> </tr> </table> <p>USE MEDIUM BASE LAMP ONLY FOR MH, PSMH, & HPS.</p> <p>SINGLE ENDED MH LAMPS (SEMh) ARE G12 BASE ONLY.</p>	<input type="checkbox"/> 175	<input type="checkbox"/> HPS	<input type="checkbox"/> 120	<input type="checkbox"/> 150	<input type="checkbox"/> MH	<input type="checkbox"/> 208	<input type="checkbox"/> 100	<input type="checkbox"/> PSMH	<input type="checkbox"/> 240	<input type="checkbox"/> 85	<input type="checkbox"/> SEMH	<input type="checkbox"/> 277	<input type="checkbox"/> 70	<input type="checkbox"/> CFL	<input type="checkbox"/> 480	<input type="checkbox"/> 60		<input type="checkbox"/> MT	<input type="checkbox"/> 42		<input type="checkbox"/> OTHER (SPECIFY)	<input type="checkbox"/> 35			<input type="checkbox"/> OTHER (SPECIFY)			STANDARD TEXTURED FINISH <input type="checkbox"/> BLACK RAL-9005-T <input type="checkbox"/> WHITE RAL-9003-T <input type="checkbox"/> GREY RAL-7004-T <input type="checkbox"/> DRK BRONZE RAL-8019-T <input type="checkbox"/> GREEN RAL-6005-T FOR SMOOTH FINISH REMOVE SUFFIX "T" (EXAMPLE: RAL-9500) SEE WEBSITE FOR ADDITIONAL COLORS	<input type="checkbox"/> CLEAR POLYCARBONATE DIFFUSER LEX <input type="checkbox"/> WALL SIDE GLARE SHIELD GS <input type="checkbox"/> PHOTO CELL + VOLTAGE (EX: PC120V) PC+V <input type="checkbox"/> SINGLE FUSE (120V , 277V) SF <input type="checkbox"/> DOUBLE FUSE (208V. , 240V) DF UPLIGHT OPTIONS <input type="checkbox"/> BEAM UP (HID LAMPS ONLY) BU <input type="checkbox"/> ACCENT/FLOOD UP AU
<input type="checkbox"/> 175	<input type="checkbox"/> HPS	<input type="checkbox"/> 120																													
<input type="checkbox"/> 150	<input type="checkbox"/> MH	<input type="checkbox"/> 208																													
<input type="checkbox"/> 100	<input type="checkbox"/> PSMH	<input type="checkbox"/> 240																													
<input type="checkbox"/> 85	<input type="checkbox"/> SEMH	<input type="checkbox"/> 277																													
<input type="checkbox"/> 70	<input type="checkbox"/> CFL	<input type="checkbox"/> 480																													
<input type="checkbox"/> 60		<input type="checkbox"/> MT																													
<input type="checkbox"/> 42		<input type="checkbox"/> OTHER (SPECIFY)																													
<input type="checkbox"/> 35																															
<input type="checkbox"/> OTHER (SPECIFY)																															