


RAP22
[400 WATT MAX.]



RAP14
[250 WATT MAX.]

E.P.A. **RAP22**- 3.76
RAP14- 1.69



WM



1



2-180



3-120



3-180



4-120



4-90



5-90

SPECIFICATIONS

LUMINAIRE: ONE PIECE. UNITIZED HEAVY WALL ALUMINUM HOUSING WITH 1/4" CLEAR ACRYLIC LENS.

OPTICS: COMPUTER DESIGNED ONE PIECE SYMMETRIC SPECULAR UPPER REFLECTOR. COMBINES WITH CLEAR SPECULAR LOWER DISTRIBUTING REFLECTOR TO PRODUCE WIDE EFFICIENT, LIGHT DISTRIBUTION.

OPTION: ASYMMETRIC DISTRIBUTION. ASY

MOUNTING: RUGGED TWO PIECE CAST ALUMINUM FITTER HAS ATTACHED INTERNAL SLIP FITTER WHICH SLIPS INSIDE POLE AND IS FIXED TO POLE WITH FOUR STAINLESS STEEL SET SCREWS.

LAMP HOLDER: MEDIUM OR MOGUL BASE PORCELAIN.


LAMP: [BY OTHERS]

BALLAST: H.P.F./C.W.A. AUTOTRANSFORMER. -20° STARTING TEMPERATURE. ELECTRICAL COMPONENTS ARE MOUNTED TO A REMOVABLE BALLAST TRAY. BALLAST IS EQUIPPED WITH FACTORY INSTALLED QUICK DISCONNECT PLUG.


FINISH: POLYESTER POWDER COAT-STATE OF THE ART 20 PSI PRESSURE POWER WASH AT 140° TEMPERATURE INCORPORATES FOUR STEP IRON PHOSPHATE PROCESS TO CLEANSE AND PRETREAT THE METAL SURFACE FOR MAXIMUM PAINT ADHESION. ELECTROSTATICALLY APPLIED TEXTURED POLYESTER POWDER TOPCOAT IS BAKED AT 400° TEMPERATURE FOR MAXIMUM HARDNESS AND EXTERIOR DURABILITY.



MOUNTING STYLES



PTA




PTB

PTB27-TO FIT OVER 2 7/8" O.D. TENON.

PTB23-TO FIT OVER 2 3/8" O.D. TENON.


WALL MOUNT

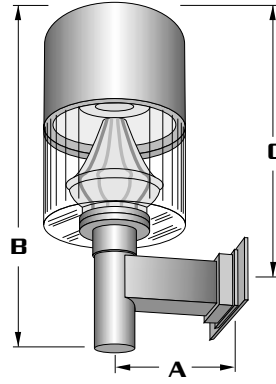


LUM.	A	B	C
RAP22	18"	44 1/2"	37 1/2"
RAP14	12"	34 1/2"	27 1/2"

EXTRUDED ALUMINUM ARM AND CAST ALUMINUM WALL BRACKET ASSEMBLY PROVIDED WITH BUILT IN GASKETED WIRE ACCESS FOR FIXTURE/SUPPLY WIRE CONNECTION.

WALL PLATE




**LAMP SIZE:
250 - 400 WATT**



E.P.A.= 3.76

RAP22
[400 W. MAX.]



E.P.A.= 1.69

RAP14
[250 W. MAX.]

HEAVY WALL ALUMINUM HOUSING.

SYMMETRIC OR ASYMMETRIC LIGHT DISTRIBUTION.

ORDERING INFORMATION

MODEL NO.:	OPTICS	WATTAGE TYPE VOLTAGE	MOUNTING	FINISH	OPTIONS
RAP					
MODEL NO.:	OPTICS	LAMP	MOUNTING	FINISH	OPTIONS
R A P	<input type="checkbox"/> SYMMETRIC SYM <input type="checkbox"/> ASYMMETRIC ASY	WATTAGE TYPE VOLTAGE <input type="checkbox"/> 400 <input type="checkbox"/> HPS <input type="checkbox"/> 120 <input type="checkbox"/> 250 <input type="checkbox"/> MH <input type="checkbox"/> 208 <input type="checkbox"/> 200 <input type="checkbox"/> MV <input type="checkbox"/> 240 <input type="checkbox"/> 175 <input type="checkbox"/> 277 <input type="checkbox"/> 150 <input type="checkbox"/> 480 <input type="checkbox"/> 100 <input type="checkbox"/> MT RAP14- 250 W. MAX.	 <input type="checkbox"/> PTA <input type="checkbox"/> PTB23 (TO FIT 2 3/8" O.D.) <input type="checkbox"/> PTB27 (TO FIT 2 7/8" O.D.) WALL MOUNT <input type="checkbox"/> WM	STANDARD TEXTURED FINISH <input type="checkbox"/> BLACK RAL-9005-T <input type="checkbox"/> WHITE RAL-9003-T <input type="checkbox"/> GREY RAL-7004-T <input type="checkbox"/> DRK BRONZE RAL-8019-T <input type="checkbox"/> GREEN RAL-6005-T FOR SMOOTH FINISH REMOVE SUFFIX "T" (EXAMPLE: RAL-9500) SEE WEBSITE FOR ADDITIONAL COLORS	<input type="checkbox"/> CLEAR POLYCARBONATE DIFFUSER LEX <input type="checkbox"/> HOUSE SIDE SHIELD 90° HS 90° 135° HS 135° 180° HS 180° <input type="checkbox"/> SINGLE FUSE (120V., 277V) SF <input type="checkbox"/> DOUBLE FUSE (208V., 240V) DF