SAP



SAP20
(400 W. MAX.)



SAP12
(250 W. MAX.)

E.P.A. SAP20= 5.49
SAP12= 2.12

SPECIFICATIONS

LUMINAIRE: ONE PIECE, UNITIZED HEAVY WALL ALUMINUM HOUSING WITH 1/4" CLEAR ACRYLIC LENS.

OPTICS: COMPUTER DESIGNED ONE PIECE SYMMETRIC SPECULAR UPPER REFLECTOR, COMBINES WITH CLEAR SPECULAR LOWER DISTRIBUTING REFLECTOR TO PRODUCE WIDE EFFICIENT, LIGHT DISTRIBUTION.
OPTION: ASYMMETRIC DISTRIBUTION. . . . . ASY

MOUNTING: RUGGED TWO PIECE CAST ALUMINUM FITTER HAS ATTACHED INTERNAL SLIP FITTER WHICH SLIPS INSIDE POLE AND IS FIXED TO POLE WITH FOUR STAINLESS STEEL SET SCREWS.

LAMP HOLDER: MEDIUM OR MOGUL BASE PORCELAIN.

LAMP: (BY OTHERS)

BALLAST: H.P.F./C.W.A. AUTOTRANSFORMER, -20° STARTING TEMPERATURE. ELECTRICAL COMPONENTS ARE MOUNTED TO A REMOVABLE BALLAST TRAY. BALLAST IS EQUIPPED WITH FACTORY INSTALLED QUICK DISCONNECT PLUG.

FINISH: POLYESTER POWDER COAT-STATE OF THE ART 20 PSI PRESSURE POWER WASH AT 140° TEMPERATURE INCORPORATES FOUR STEP IRON PHOSPHATE PROCESS TO CLEANSE AND PRETREAT THE METAL SURFACE FOR MAXIMUM PAINT ADHESION. ELECTROSTATICALLY APPLIED TEXTURED POLYESTER POWDER TOPCOAT IS BAKED AT 400° TEMPERATURE FOR MAXIMUM HARDNESS AND EXTERIOR DURABILITY.

U.L. Listed for wet location

U.S. ARCHITECTURAL LIGHTING
660 WEST AVENUE O, PALMDALE, CA. 93551
(661) 233-2000
FAX NO. (661) 233-2001
www.usaltg.com

MOUNTING STYLES



☐ PTA



☐ PTB

PTB27-TO FIT OVER 2 7/8"O.D. TENON.

PTB23-TO FIT OVER 2 3/8" O.D. TENON.

WALL MOUNT

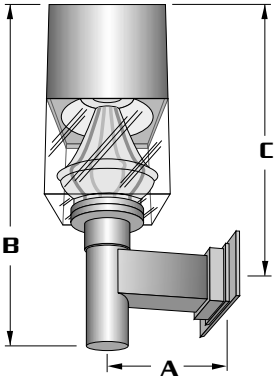

LUM.	A	B	C
SAP20	18"	44½"	37½"
SAP12	12"	32½"	25½"

EXTRUDED ALUMINUM ARM AND CAST ALUMINUM WALL BRACKET ASSEMBLY PROVIDED WITH BUILT IN GASKETED WIRE ACCESS FOR FIXTURE/SUPPLY WIRE CONNECTION.

WALL PLATE



LAMP SIZE: 100 - 400 WATT



E.P.A.= 5.49

SAP20
(400 W. MAX.)



E.P.A.= 2.12

SAP12
(250 W. MAX.)

HEAVY WALL ALUMINUM HOUSING.

SYMMETRIC OR ASYMMETRIC LIGHT DISTRIBUTION.

ORDERING INFORMATION

MODEL NO. : SAP	OPTICS	WATTAGE TYPE VOLTAGE	MOUNTING	FINISH	OPTIONS

MODEL NO. :	OPTICS	LAMP	MOUNTING	FINISH	OPTIONS
S A P	☐ SYMMETRIC **SYM** ☐ ASYMMETRIC **ASY**	WATTAGE TYPE VOLTAGE ☐ **400** ☐ **HPS** ☐ **120** ☐ **250** ☐ **MH** ☐ **208** ☐ **200** ☐ **MV** ☐ **240** ☐ **175** ☐ **277** ☐ **150** ☐ **480** ☐ **100** ☐ **MT** **SAP12-** 250 W. MAX.	 ☐ **PTA** ☐ **PTB23** (TO FIT 2 3/8" O.D.) ☐ **PTB27** (TO FIT 2 7/8" O.D.) **WALL MOUNT** ☐ **W M**	**STANDARD TEXTURED FINISH** ☐ BLACK **RAL-9005-T** ☐ WHITE **RAL-9003-T** ☐ GREY **RAL-7004-T** ☐ DRK BRONZE **RAL-8019-T** ☐ GREEN **RAL-6005-T** FOR SMOOTH FINISH REMOVE SUFFIX "T" (EXAMPLE: RAL-9500) SEE WEBSITE FOR ADDITIONAL COLORS	☐ CLEAR POLYCARBONATE DIFFUSER . . . . . **LEX** ☐ HOUSE SIDE SHIELD 90° . . . . . **HS 90°** 135° . . . . . **HS 135°** 180° . . . . . **HS 180°** ☐ SINGLE FUSE (120V. , 277V) . . . . . **SF** ☐ DOUBLE FUSE (208V. , 240V) . . . . . **DF**

U.S. ARCHITECTURAL LIGHTING
660 WEST AVENUE O, PALMDALE, CA. 93551
(661) 233-2000
FAX NO. (661) 233-2001
www.usaltg.com