



# STEALTH


[400 WATT MAX.]

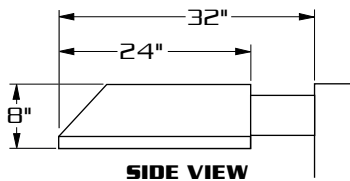

**SIDE VIEW**




**FRONT VIEW**

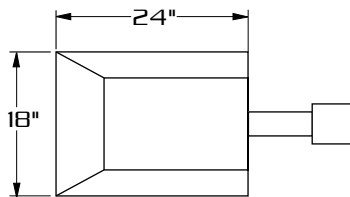

**TOP VIEW**

E.P.A.= 1.57

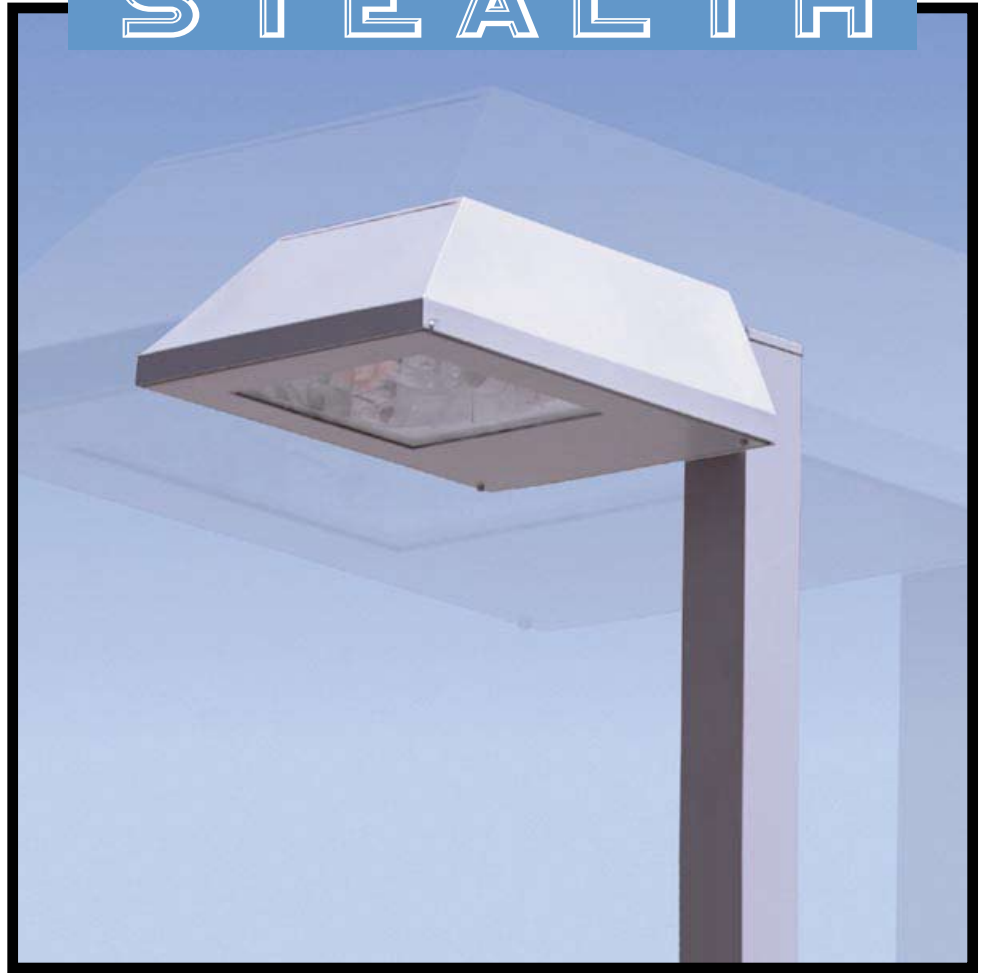

WM



1



2-180



2-90



3-90



3-120



4-90

## SPECIFICATIONS

**HOUSING:** ONE PIECE HEAVY GAUGE DIE FORMED ALUMINUM CONSTRUCTION WITH SEPARATE BALLAST COMPARTMENT.

**LENS ASS'Y:** ONE PIECE HINGED HEAVY GAUGE DIE FORMED ALUMINUM DOOR FRAME SURROUNDS 3/16" CLEAR TEMPERED GLASS LENS. GLASS IS SEALED TO DOOR WITH HIGH TEMPERATURE SILICONE SEAL. TWO CAPTIVE THUMB SCREWS DISENGAGE LENS ASSEMBLY FROM HOUSING WITHOUT THE USE OF TOOLS.

**OPTICS:** COMPUTER DESIGNED ONE PIECE SEMI SPECULAR HYDROFORMED REFLECTOR COMBINES WITH LENS TO PRODUCE A HIGHLY EFFICIENT, SHARP CUTOFF. OPTICS ARE FIELD ROTATABLE.

**GASKETING:** CLOSED CELL EPDM GASKETING COMPRESSED BETWEEN DOOR AND HOUSING SEALS OPTICAL CHAMBER.

**LAMP HOLDER:** MO6UL BASE PORCELAIN.

**LAMP:** [BY OTHERS]



**BALLAST:** H.P.F./C.W.A. AUTOTRANSFORMER, -20° STARTING TEMPERATURE. ELECTRICAL COMPONENTS ARE MOUNTED TO HINGED REMOVABLE TRAY FOR EASY ACCESS.

**ARM:** 3"X5"X8" LONG HEAVY WALL EXTRUDED ALUMINUM. ARM IS SECURED TO HOUSING AND TO POLE WITH STAINLESS STEEL RODS.



**FINISH:** POLYESTER POWDER COAT-STATE OF THE ART 20 PSI PRESSURE POWER WASH AT 140° TEMPERATURE INCORPORATES FOUR STEP IRON PHOSPHATE PROCESS TO CLEANSE AND PRETREAT THE METAL SURFACE FOR MAXIMUM PAINT ADHESION. ELECTROSTATICALLY APPLIED TEXTURED POLYESTER POWDER TOP COAT IS BAKED AT 400° TEMPERATURE FOR MAXIMUM HARDNESS AND EXTERIOR DURABILITY.



**POLE DRILLING TEMPLATE**




**WALL MOUNT**




EXTRUDED ALUMINUM ARM AND CAST ALUMINUM WALL BRACKET ASSEMBLY PROVIDED WITH BUILT IN GASKETED WIRE ACCESS FOR FIXTURE/SUPPLY WIRE CONNECTION.

**WALL PLATE**



**LAMP SIZE:  
100 - 400 WATT**



E.P.A. = 1.57

**RECTILINEAR HEAVY WALL ALUMINUM HOUSING.**

**FIVE OPTICAL SYSTEMS ENCLOSED IN IMPACT RESISTANT TEMPERED GLASS LENS.**

**HINGED REMOVABLE BALLAST TRAY, WITH QUICK DISCONNECT PLUG FOR EASY ACCESS TO ELECTRICAL COMPONENTS.**

**ORDERING INFORMATION**

MODEL NO. : <b>STL</b>	OPTICS	WATTAGE TYPE VOLTAGE	MOUNTING	FINISH	OPTIONS
MODEL NO. :	OPTICS	LAMP	MOUNTING	FINISH	OPTIONS
<b>S T L</b>	<input type="checkbox"/> TYPE I <b>I</b> ..... (hydroform)	<input type="checkbox"/> 400 <input type="checkbox"/> HPS <input type="checkbox"/> 120	<input type="checkbox"/> 1 .....	STANDARD TEXTURED FINISH	<input type="checkbox"/> CLEAR POLYCARBONATE DIFFUSER ..... <b>LEX</b>
	<input type="checkbox"/> TYPE II <b>II</b> ..... (hydroform)	<input type="checkbox"/> 250 <input type="checkbox"/> MH <input type="checkbox"/> 208	<b>STREET LIGHTING ARM MOUNT</b>	<input type="checkbox"/> BLACK RAL-9005-T	<input type="checkbox"/> HOUSE SIDE SHIELD ..... <b>HS</b>
	<input type="checkbox"/> TYPE III <b>III</b> ..... (hydroform)	<input type="checkbox"/> 200 <input type="checkbox"/> MV <input type="checkbox"/> 240	<input type="checkbox"/> <b>ST 23</b> ..... (TO FIT OVER 2 3/8" O.D. ARM)	<input type="checkbox"/> WHITE RAL-9003-T	<input type="checkbox"/> PHOTO CELL + VOLTAGE (EXAMPLE: PC120V) ..... <b>PC+V</b>
	<input type="checkbox"/> TYPE IV (FORWARD THROW) <b>IV</b> ..... (segmented)	<input type="checkbox"/> 175 <input type="checkbox"/> 277	<b>ADJUSTABLE KNUCKLE</b>	<input type="checkbox"/> GREY RAL-7004-T	<input type="checkbox"/> TWIST LOCK PHOTO CELL+VOLTAGE (EXAMPLE TPC120V) ..... <b>TPC+V</b>
	<input type="checkbox"/> TYPE V <b>V-SQ</b> ..... (segmented)	<input type="checkbox"/> 150 <input type="checkbox"/> 480 <input type="checkbox"/> MT	<input type="checkbox"/> <b>NKLE23</b> ..... (TO FIT OVER 2 3/8" O.D. )	<input type="checkbox"/> DRK BRONZE RAL-8019-T	<input type="checkbox"/> TWIST LOCK RECEPTACLE ONLY ..... <b>TPR</b>
		<b>METAL HALIDE UNITS ONLY</b> USE ED28 LAMP FOR 400 W. USE MEDIUM BASE LAMP FOR 100 W.	<b>WALL MOUNT</b> <input type="checkbox"/> <b>WM</b> .....	<input type="checkbox"/> GREEN RAL-6005-T	<input type="checkbox"/> SINGLE FUSE (120V., 277V) ..... <b>SF</b>
			SEE ACCESSORIES SECTION FOR <b>ST23</b> AND <b>NKLE</b> DETAILS	FOR SMOOTH FINISH REMOVE SUFFIX "T" (EXAMPLE: RAL-9500)	<input type="checkbox"/> DOUBLE FUSE (208V., 240V) ..... <b>DF</b>
				SEE WEBSITE FOR ADDITIONAL COLORS	<input type="checkbox"/> TAMPER PROOF ..... <b>TP</b>