

SOLID STATE AREA LIGHTING

TRILUX™ WALLMOUNT SERIES-LED

S P E C I F I C A T I O N S

HOUSING & BRACKET ARM ASSEMBLY
Precision cast aluminum construction.

LUMINAIRE
Heavy wall, precisely machined aluminum construction.

GASKETING
Silicone o-ring provided between housing and lens to prevent contaminants and moisture.

LENS
Clear Borosilicate tempered glass lens is standard. (Frosted lens is optional)

LED EMITTERS
Luxeon-S emitters available in 80CRI 2700K, 3000K, 3500K, and 4000K(standard) color temps. 90 CRI in 3000K only. Emitters are mechanically fastened to rear heat sink and are field replaceable. Emitters are driven @350mA for a nominal wattage of 9 Watts per LED.

LED DRIVER
Constant Current LED Driver is sealed in housing base. Driver accepts input voltages from 100-277Vac. Drivers are IP66 rated. 0-10V dimming optional.

OPTICS
Mold injected, aluminum coated polycarbonate Reflectors provided with a clear protective lacquer available in 12, 28, 45, and 56 degree beam spreads. Optics click into LED base for precise alignment.

MOUNTING
2.5" O.D. and 4.5" O.D. units to mount to 3" junction box. (By others) 5.5" O.D. units to mount to 4" junction box.(By others)

FINISH
Polyester powder coat incorporates four step iron phosphate process to cleanse and treat the metal surface for maximum paint adhesion. Electrostatically applied textured polyester powder topcoat is baked at 400°F for maximum hardness and exterior durability.



PROJECT NAME: _____




PROJECT TYPE: _____



TLW

LED technology has been added to Trilux™. These handsome, quality wall luminaires have been optically designed and engineered for maximum light output and maximum light distribution.

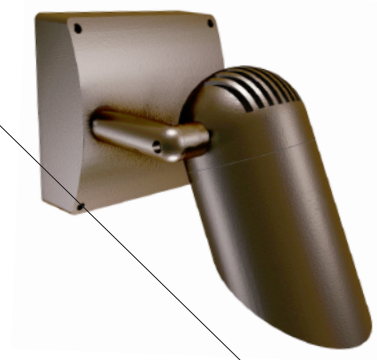
Three styles and three sizes listed below.

	Diameter -	2.5"	4.5"	5.5"
 Flush Lens	Model -	TLW-LF-209	TLW-LF-427	TLW-LF-536
	Max Watt -	9W	27W	36W
 Recess Lens	Model -	TLW-LR-209	TLW-LR-427	TLW-LR-536
	Max Watt -	9W	27W	36W
 Angled Lens	Model -	TLW-LA-209	TLW-LA-427	TLW-LA-536
	Max Watt -	9W	27W	36W

2014303

S P E C I F I C A T I O N S

	TLW-LF FLUSH LENS	TLW-LR RECESS LENS	TLW-LA ANGLED LENS	HOUSING AND BRACKET	
9W 2.5" O.D.	 TLW-LF-209	 TLW-LR-209	 TLW-LA-209	6.25" 7"	3.5" 3"
27W 4.5" O.D.	 TLW-LF-427	 TLW-LR-427	 TLW-LA-427	6.25" 7"	7"
36W 5.5" O.D.	 TLW-LF-536	 TLW-LR-536	 TLW-LA-536	6.25" 7"	3"



S P E C / O R D E R I N G I N F O R M A T I O N

MODEL / LENS	NO. LEDs	COLOR	BEAM ANGLE	FINISH	OPTIONS
MODEL/LENS	LED MODE	OPTICS	FINISH	OPTIONS	OPTIONS