




VNDL

[400 WATT MAX.]



E.P.A. VNDL= 1.65
VNDLF=1.65

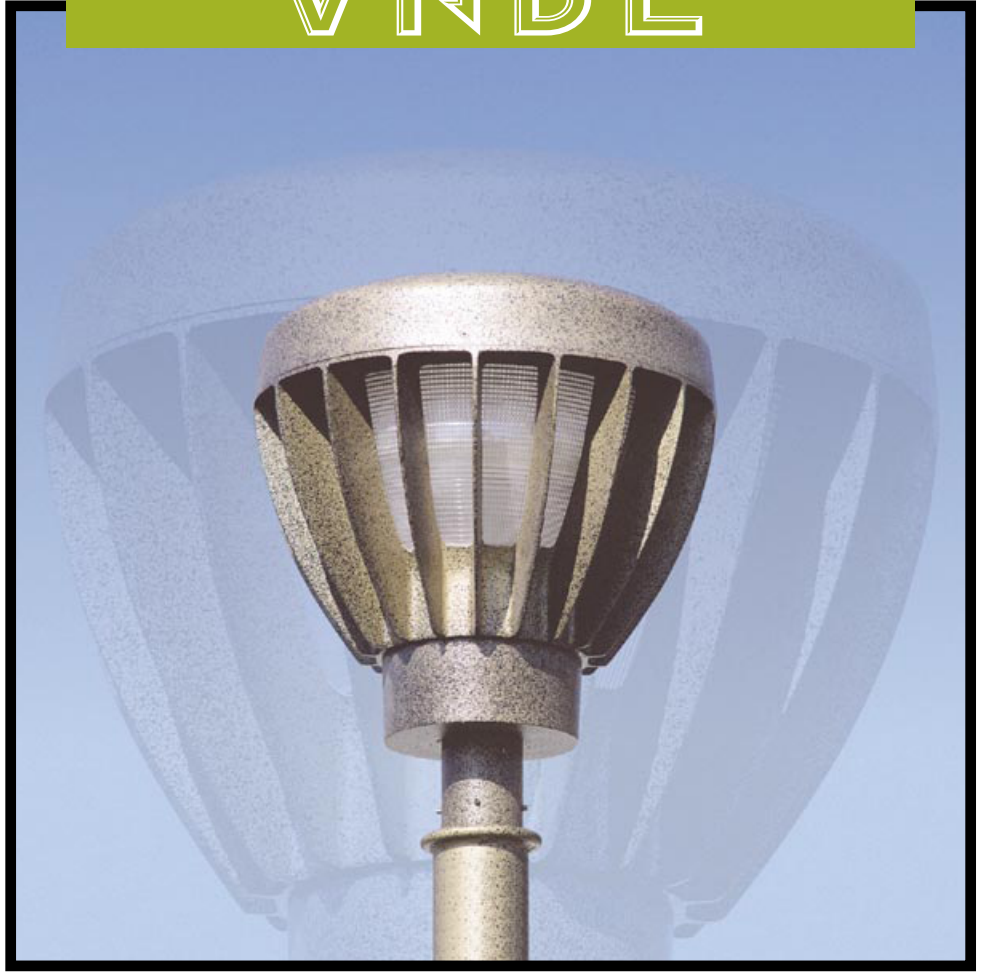

WM



1



2-180



3-180



3-120



4-120



4-90



5-90

SPECIFICATIONS

LUMINAIRE: HOUSING AND HOOD ALL HEAVY WALL DURABLE. CORROSION RESISTANT. CAST ALUMINUM CONSTRUCTION.

OPTICS: CLEAR POLYCARBONATE PRISMATIC REFRACTOR PROVIDES TYPE II OR TYPE V LIGHT DISTRIBUTION.

LAMP HOLDER: MEDIUM OR MOGUL BASE PORCELAIN WITH LAMP LOCKING SHELL.



LAMP: (BY OTHERS)

BALLAST: H.P.F./C.W.A. AUTOTRANSFORMER. -20° STARTING TEMPERATURE. ELECTRICAL COMPONENTS ARE MOUNTED TO A REMOVABLE BALLAST TRAY. BALLAST IS EQUIPPED WITH FACTORY INSTALLED QUICK DISCONNECT PLUG.

FINISH: POLYESTER POWDER COAT-STATE OF THE ART 20 PSI PRESSURE POWER WASH AT 140° TEMPERATURE INCORPORATES FOUR STEP IRON PHOSPHATE PROCESS TO CLEANSE AND PRETREAT THE METAL SURFACE FOR MAXIMUM PAINT ADHESION. ELECTROSTATICALLY APPLIED TEXTURED POLYESTER POWDER TOPCOAT IS BAKED AT 400° TEMPERATURE FOR MAXIMUM HARDNESS AND EXTERIOR DURABILITY.




MOUNTING STYLES



PTB27-TO FIT OVER 2 7/8" O.D. TENON.


PTB23-TO FIT OVER 2 3/8" O.D. TENON.

WALL MOUNT


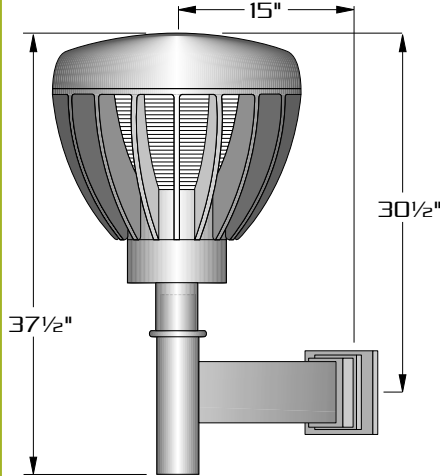


EXTRUDED ALUMINUM ARM AND CAST ALUMINUM WALL BRACKET ASSEMBLY PROVIDED WITH BUILT IN GASKETED WIRE ACCESS FOR FIXTURE/SUPPLY WIRE CONNECTION.

WALL PLATE



**LAMP SIZE:
50 - 400 WATT**



**CORROSION RESISTANT, DURABLE
CAST ALUMINUM**

**POLYCARBONATE OR ACRYLIC
LENS.**

**SYMMETRIC OR ASYMMETRIC
LIGHT DISTRIBUTION.**

ORDERING INFORMATION

MODEL NO.:	OPTICS	WATTAGE TYPE VOLTAGE	MOUNTING	FINISH	OPTIONS
VNDL					
MODEL NO.:	OPTICS	LAMP	MOUNTING	FINISH	OPTIONS
V N D L	<input type="checkbox"/> TYPE II II.....	<input type="checkbox"/> 400 <input type="checkbox"/> HPS <input type="checkbox"/> 120		<input type="checkbox"/> BLACK RAL-9005-T	<input type="checkbox"/> HOUSE SIDE SHIELD 90° HS 90° 135° HS 135° 180° HS 180°
	<input type="checkbox"/> TYPE V V.....	<input type="checkbox"/> 250 <input type="checkbox"/> MH <input type="checkbox"/> 208	<input type="checkbox"/> PTA	<input type="checkbox"/> WHITE RAL-9003-T	<input type="checkbox"/> ACRYLIC REFRACTOR TYPE II..... ACRII
		<input type="checkbox"/> 200 <input type="checkbox"/> MV <input type="checkbox"/> 240		<input type="checkbox"/> GREY RAL-7004-T	<input type="checkbox"/> ACRYLIC REFRACTOR TYPE V..... ACRV
		<input type="checkbox"/> 175 <input type="checkbox"/> 277	<input type="checkbox"/> PTB23 (TO FIT 2 3/8" O.D.)	<input type="checkbox"/> DRK BRONZE RAL-8019-T	<input type="checkbox"/> PHOTO CELL + VOLTAGE (EXAMPLE: PC120V) PC+V
		<input type="checkbox"/> 150 <input type="checkbox"/> 480	<input type="checkbox"/> PTB27 (TO FIT 2 7/8" O.D.)	<input type="checkbox"/> GREEN RAL-6005-T	<input type="checkbox"/> SINGLE FUSE (120V., 277V) SF
		<input type="checkbox"/> 100 <input type="checkbox"/> MT	WALL MOUNT	FOR SMOOTH FINISH REMOVE SUFFIX "T" (EXAMPLE: RAL-9500)	<input type="checkbox"/> DOUBLE FUSE (208V., 240V) DF
		<input type="checkbox"/> 75	<input type="checkbox"/> WM	SEE WEBSITE FOR ADDITIONAL COLORS	
		<input type="checkbox"/> 70			
		<input type="checkbox"/> 50			