

GRADESCAPE-495

IN-GRADE FLOOD ACCENT UPLIGHT

SPECIFICATIONS

CONSTRUCTION:

Non-Corrosive ABS Body With Cast Brass Top. Heavy Duty Silicone Gasketing. Sealed Bottom Wire Leads. Body Can Be Angled for Aiming. Stainless Steel Hardware. Fixture is Sealed to an IP67 Ingress Standard.

FINISH:

Aged Brass Finish (AB) is a Patina Process Giving the Raw Brass Components a Time-Weathered Look and is Enhanced with UV-Stabilizers for a Long Lasting Look with Superior Corrosion Resistance and Durability.

The Black Finish (BLK) is a Two Stage Finish on the Raw Brass Components. A High-Adhesion Primer is Applied over the Raw Brass. The Black Coat is Applied over the Primer and Contains UV-Stabilizers Resulting in an Extremely Durable, Long Lasting, Fade Resistant Coating that is Superior To Ordinary Powdercoats.

LENS:

Clear Tempered Convex Glass Lens.

LED MODULE:

Integrated LED Module With Flood Optics (40° Beam Spread). LED's are 3000K 80CRI Min. and have a Rated Lifetime of 30,000 Hours. Module Operates from 10-14VDC, 11 Watts and 1200lm. LED Module is Field Replaceable and is Factory Prewired to the Leads. Operates from -40°C to 50°C.

INSTALLATION:

In-Grade Fixture Should Not Intended to be Submerged or Installed in a Location with Standing Water. Fixture Is Suitable for Foot Traffic, but not Vehicle Traffic. See Page 2.

Wiring:

Fixture has Pre-Installed 16AWG Leads. Primary 25' Lead and Secondary Pass Through 18" Lead for Daisy Chaining of Multiple Fixtures. Wiring Color Matched To Housing.

Warranty:

10 Year Warranty on Housing and LED Components.

Certifications:


Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.



GRSC495
Aged Brass



GRSC495
Black

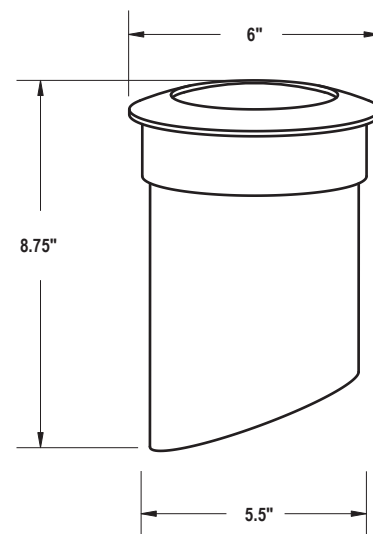

Weight: 5.83lbs

2025174


ORDERING

Ordering Example: GRSC495-AB-11W-3000K-HEXLVR


Luminaire	Finish	Lamp	Accessories
Luminaire	Finish	Lamp	Accessories
GRSC495	<input type="checkbox"/> AB - Aged Brass <input type="checkbox"/> BLK - Black	<input type="checkbox"/> 11W-3000K (1200lm Module Flood - 40° Beam Angle)	<input type="checkbox"/> HEXLVR

ACCESSORIES

Black Hex Louver
 Reduces Side Glare. Internal Mount.



INSTALLATION (12 Volt In-Grade)

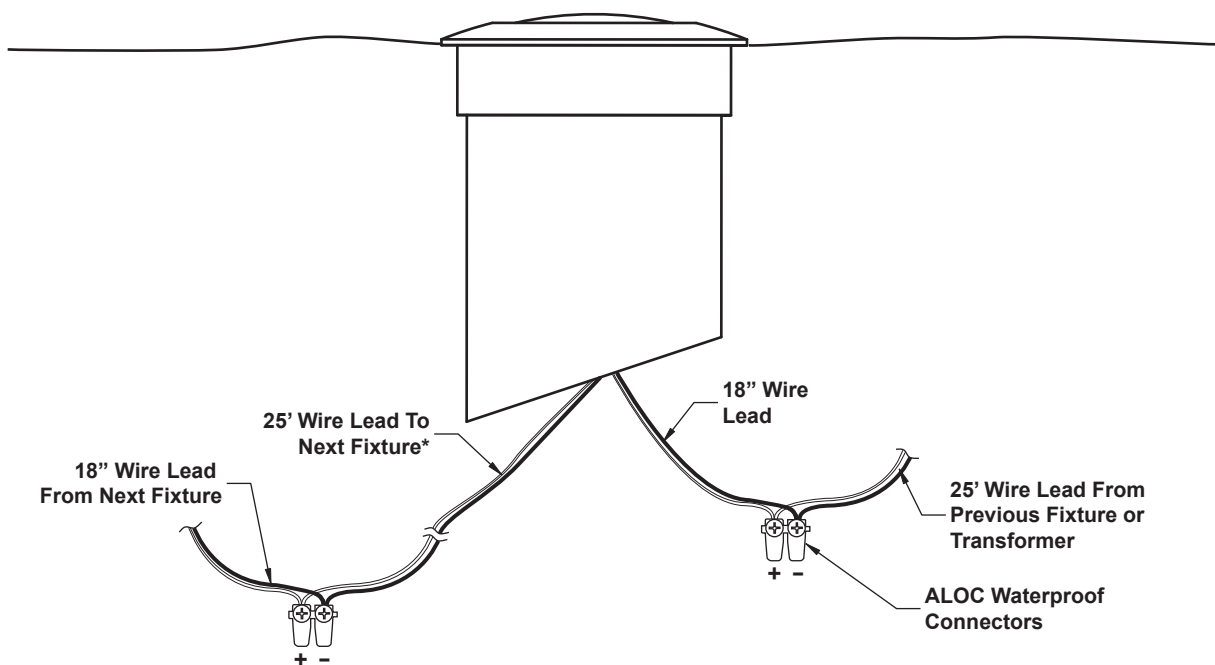

*Terminate And Cap Leads if Last Fixture On Run

NOTES:

Fixture Should Not Intended to be Submerged or Installed in a Location with Standing Water.

Fixture Is Suitable for Foot Traffic, but not Vehicle Traffic. Core Drill for Placement into Hardscapes or Dig Hole For Softscapes. Backfill with Gravel For Drainage