

## TRADITIONAL STYLED BASE

# 2800 Series

### Base

One piece corrosion resistant, durable cast aluminum construction. Minimum .210 wall thickness. Base consists of a smooth, tapered bottom section, and a highly detailed, decorative fluted section, a decorative cast aluminum Collar and a fluted Hand Hole Cover contoured to Base design. Base is furnished with Hand Hole and Cover. Hand Hole Cover supplied with tamper resistant hardware. Grounding Lug provided inside Base opposite Hand Hole.



### Anchorage

A 3/4" cast aluminum anchor ring is welded 1" above bottom of base to accept (4) fully galvanized anchor bolts. Each bolt supplied with two nuts and two washers. Anchorage is fastened through hand hole.


### Finish

Electrostatically applied TGIC Polyester Powder Coat on substrate prepared with 20 PSI power wash at 140°F. Four step media blast and iron phosphate pretreatment for protection and paint adhesion. 400°F bake for maximum hardness and durability.

## ANCHORAGE DATA

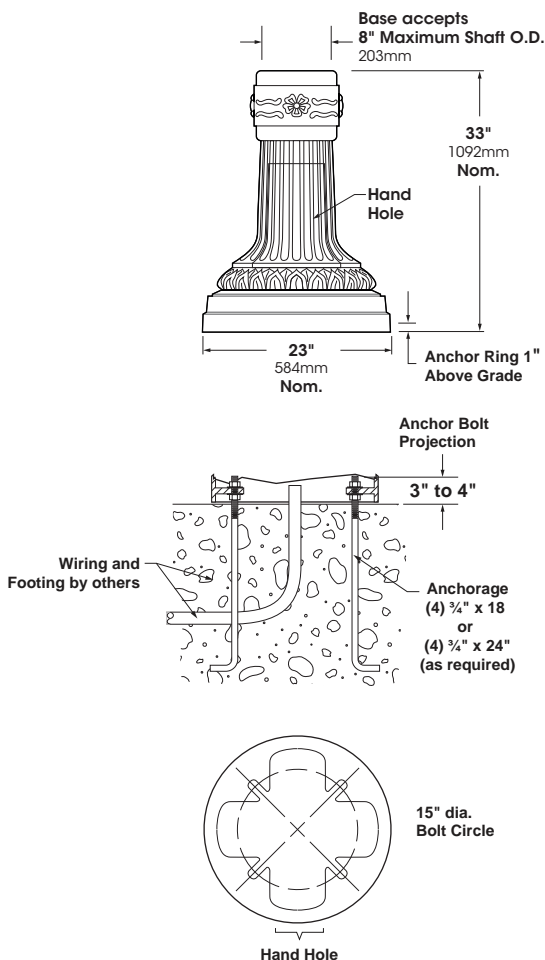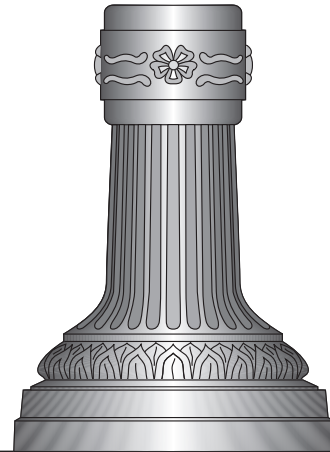

**2800**


## OPTIONS

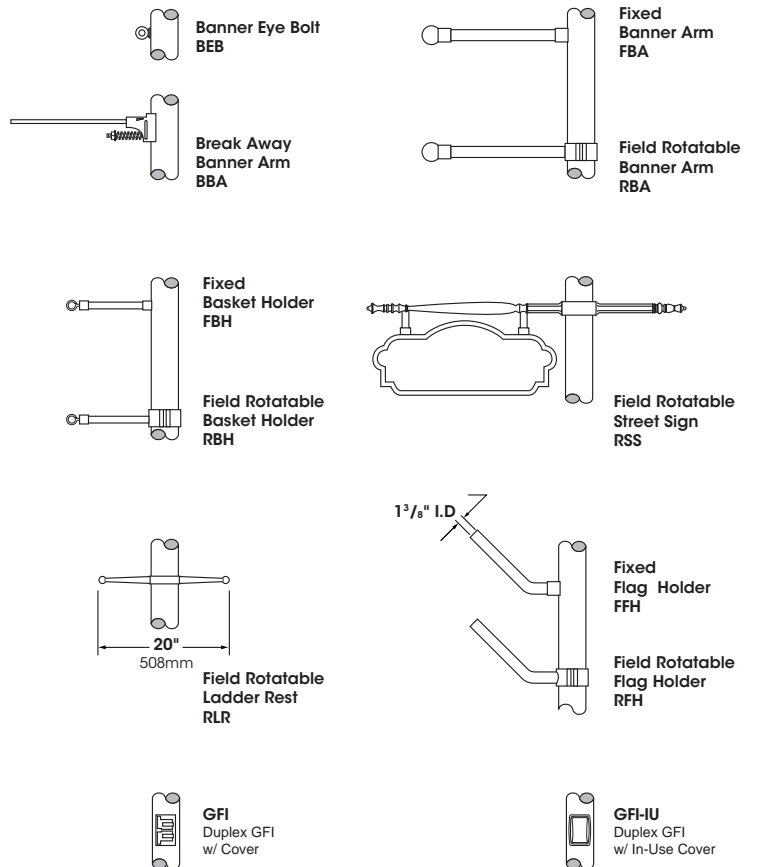
<https://www.usaltg.com/downloads/pdf/Pole-Arm-Accessories.pdf>

2024056

### SAMPLE ASSEMBLIES

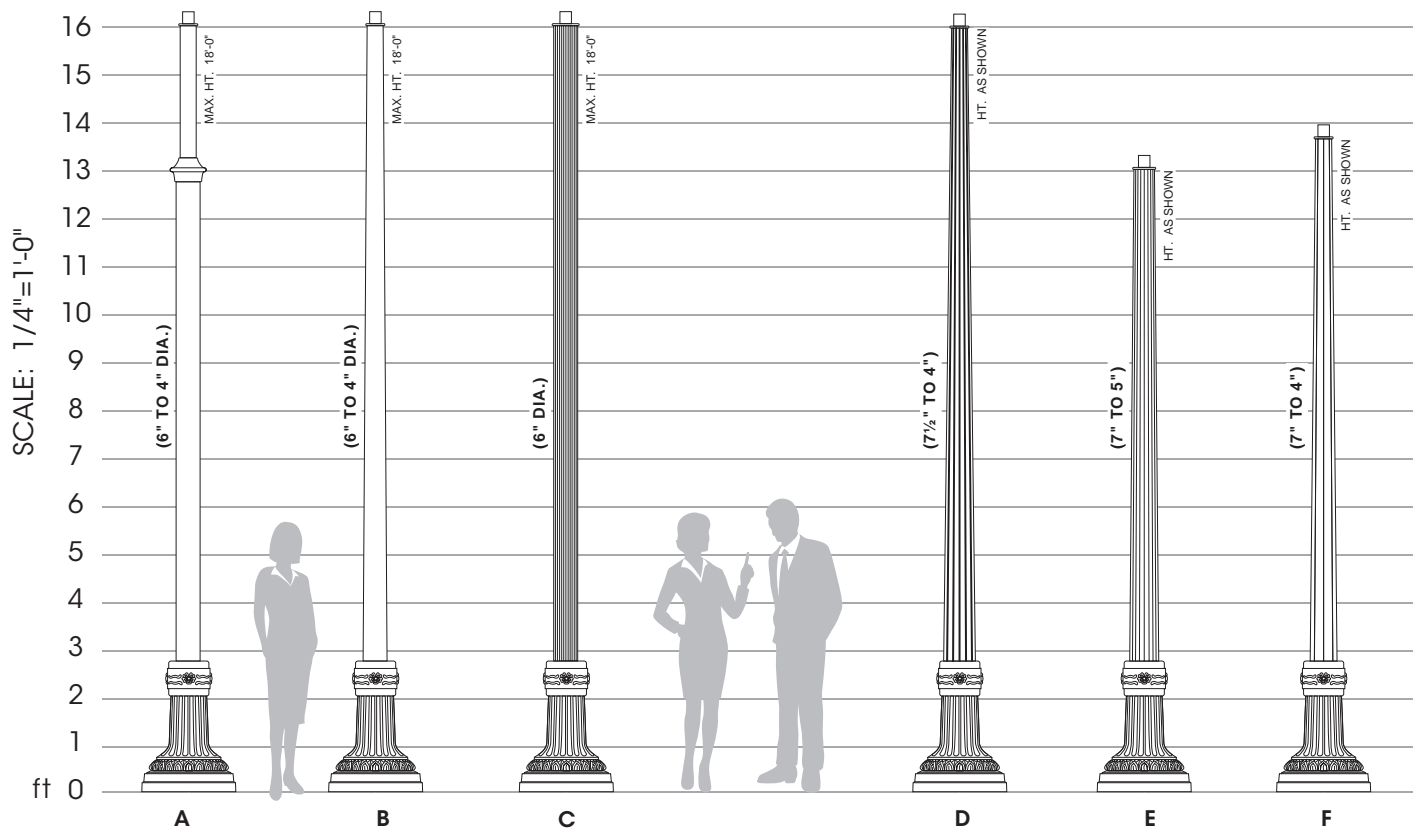

- A. 28-9040-XX-PT27/OPTIONS
- B. 28-1046T-XX-PT27/OPTIONS
- C. 28-1080-XX-PT27/OPTIONS
- D. 28-1050C-XX-PT27/OPTIONS
- E. 28-1075C-XX-PT27/OPTIONS
- F. 28-1080C-XX-PT27/OPTIONS

**Note:** XX represents height, example 10 foot and 6 inches will be written as 10'-6": 28-1040-10'-6"-PT27/OPTIONS.

**Sample Assemblies show a small offering of the Sun Valley Line of Poles & Shafts.**

**Please visit [usaltg.com](http://usaltg.com) for the full product offering.**

## TRADITIONAL STYLED BASE

# 2900 Series

### Base

One piece corrosion resistant, durable cast aluminum construction. Minimum .225 wall thickness. Decorative Base consists of an octagonal section topped by a finely detailed fluted stepped section. Base contains a large Hand Hole and Cover contoured to Base design. Hand Hole Cover supplied with tamper resistant hardware. Grounding Lug provided inside Base opposite Hand Hole.


### Anchorage

A 3/4" cast aluminum anchor ring is welded 1" above bottom of base to accept (4) fully galvanized anchor bolts. Each bolt supplied with two nuts and two washers. Anchorage is fastened through hand hole.


### Finish

Electrostatically applied TGIC Polyester Powder Coat on substrate prepared with 20 PSI power wash at 140°F. Four step media blast and iron phosphate pretreatment for protection and paint adhesion. 400°F bake for maximum hardness and durability.


### ANCHORAGE DATA

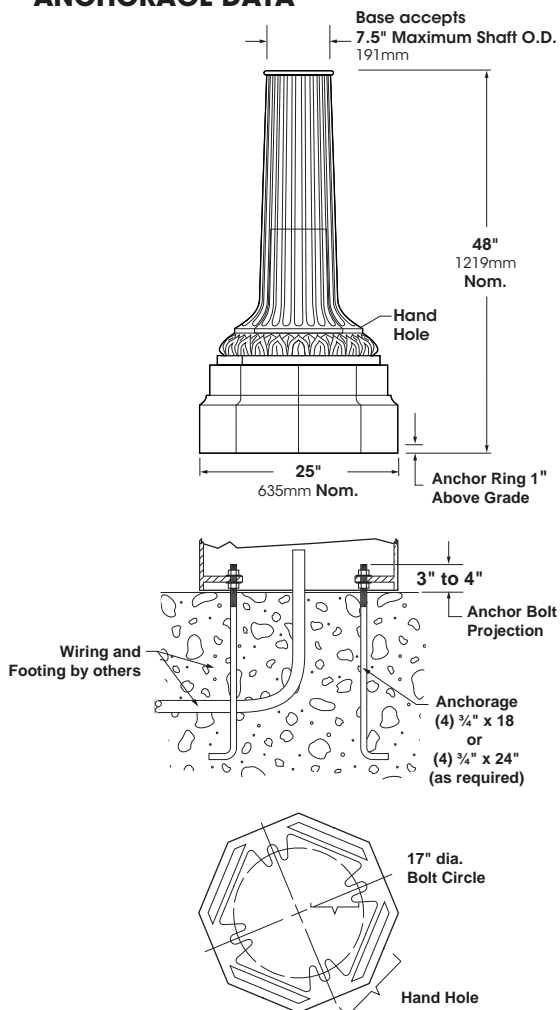

## 2900

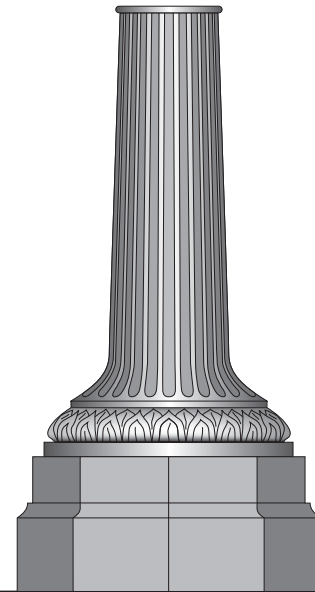


### OPTIONS

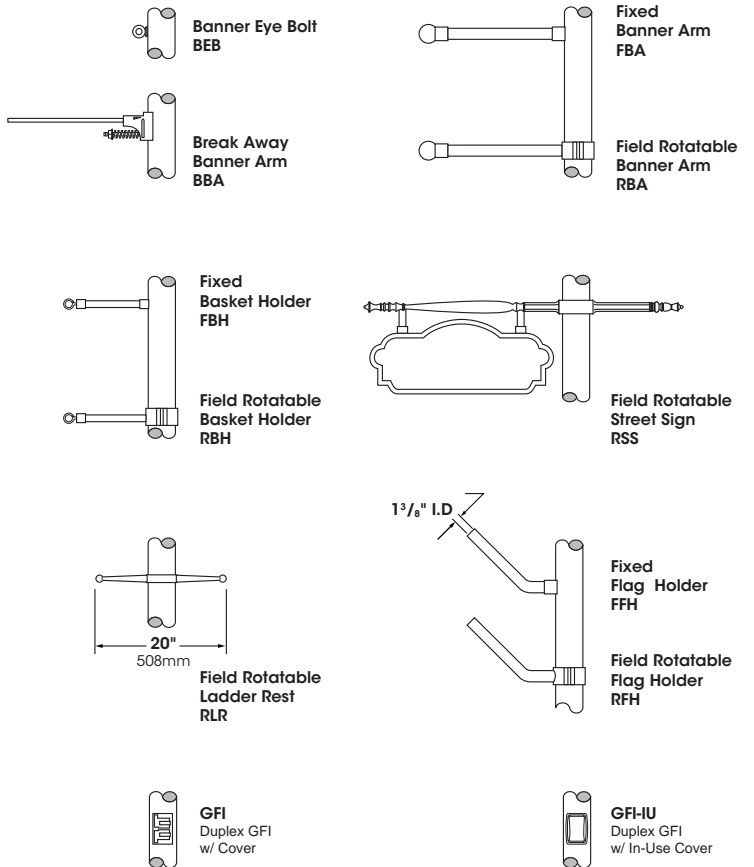

<https://www.usaltg.com/downloads/pdf/Pole-Arm-Accessories.pdf>

2024056

### SAMPLE ASSEMBLIES

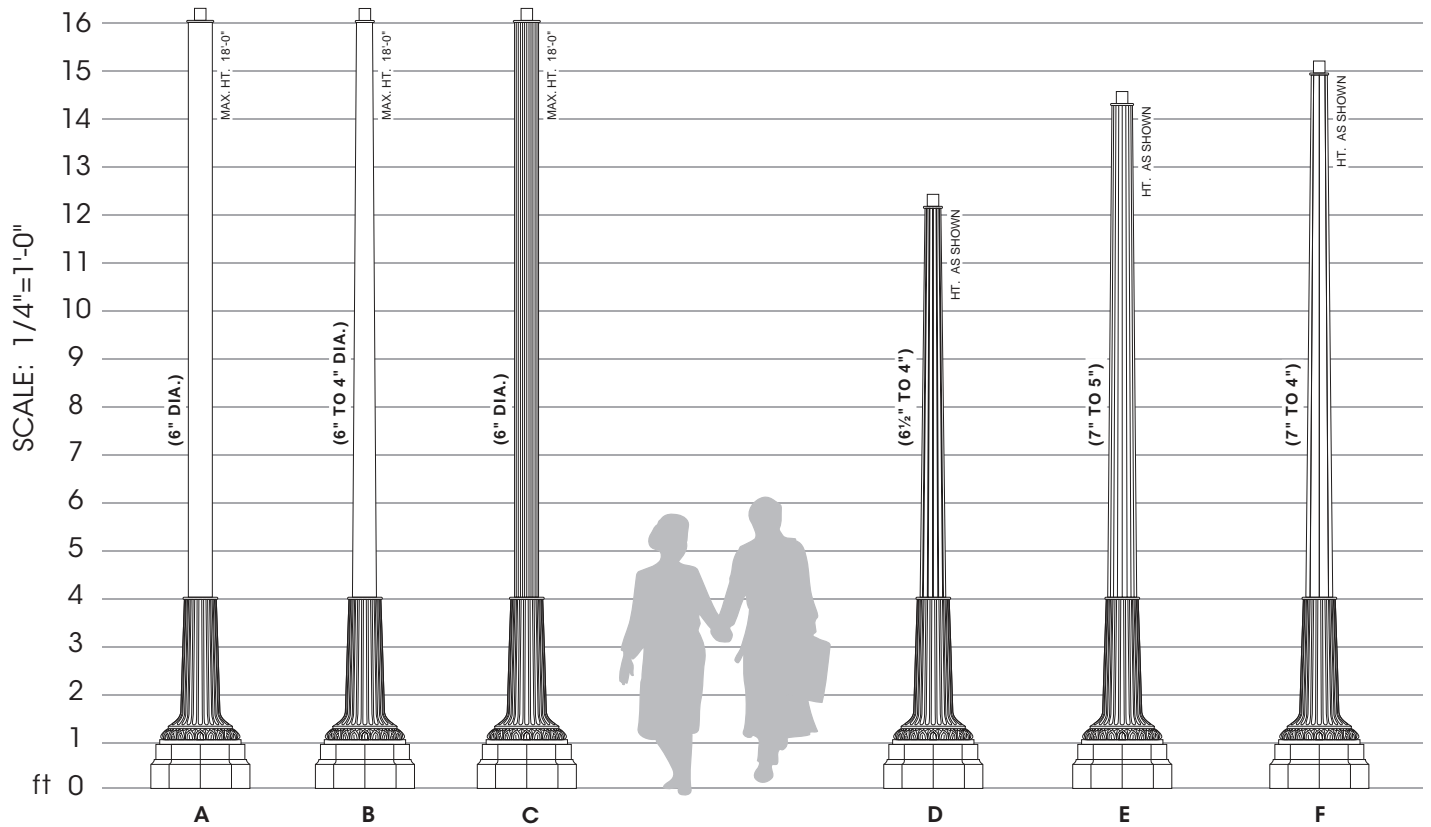

- A. 29-1090-XX-PT27/OPTIONS
- B. 29-1046T-XX-PT27/OPTIONS
- C. 29-1080-XX-PT27/OPTIONS
- D. 29-1050C-XX-PT27/OPTIONS
- E. 29-1075C-XX-PT27/OPTIONS
- F. 29-1080C-XX-PT27/OPTIONS

**Note:** XX represents height, example 10 foot and 6 inches will be written as 10'-6": 29-1040-10'-6"-PT27/OPTIONS.

**Sample Assemblies show a small offering of the Sun Valley Line of Poles & Shafts.**

**Please visit [usaltg.com](http://usaltg.com) for the full product offering.**

## TRADITIONAL STYLED BASE

# 3000 Series

### Base

Decorative, one piece corrosion resistant, durable cast aluminum construction. Minimum .220 wall thickness. Stepped four-sided Base is provided with a large Hand Hole opening and Cover contoured to Base design. Hand Hole Cover supplied with tamper resistant hardware. Grounding Lug provided inside Base opposite Hand Hole.

### Anchorage


A 3/4" cast aluminum anchor ring is welded 1" above bottom of base to accept (4) fully galvanized anchor bolts. Each bolt supplied with two nuts and two washers. Anchorage is fastened through hand hole.

### Finish


Electrostatically applied TGIC Polyester Powder Coat on substrate prepared with 20 PSI power wash at 140°F. Four step media blast and iron phosphate pretreatment for protection and paint adhesion. 400°F bake for maximum hardness and durability.


**3000**

## ANCHORAGE DATA

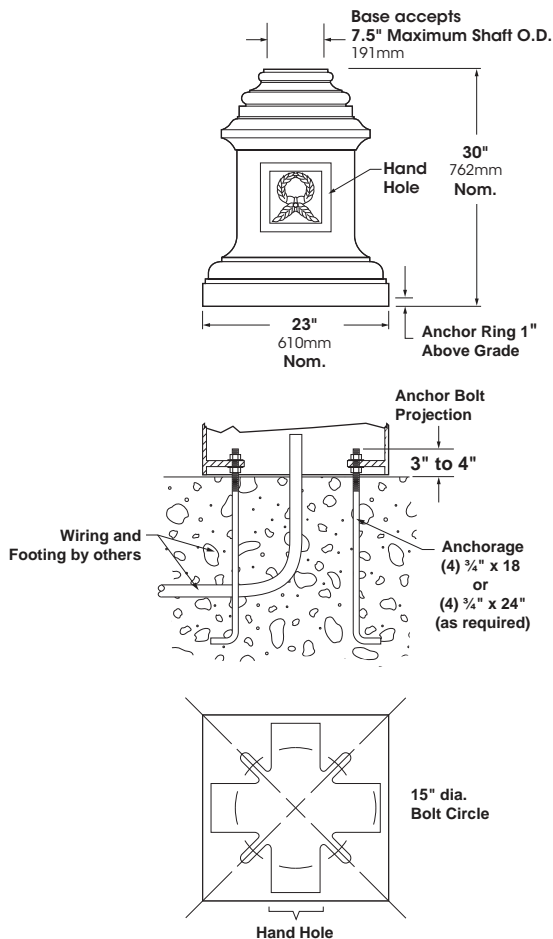


## OPTIONS

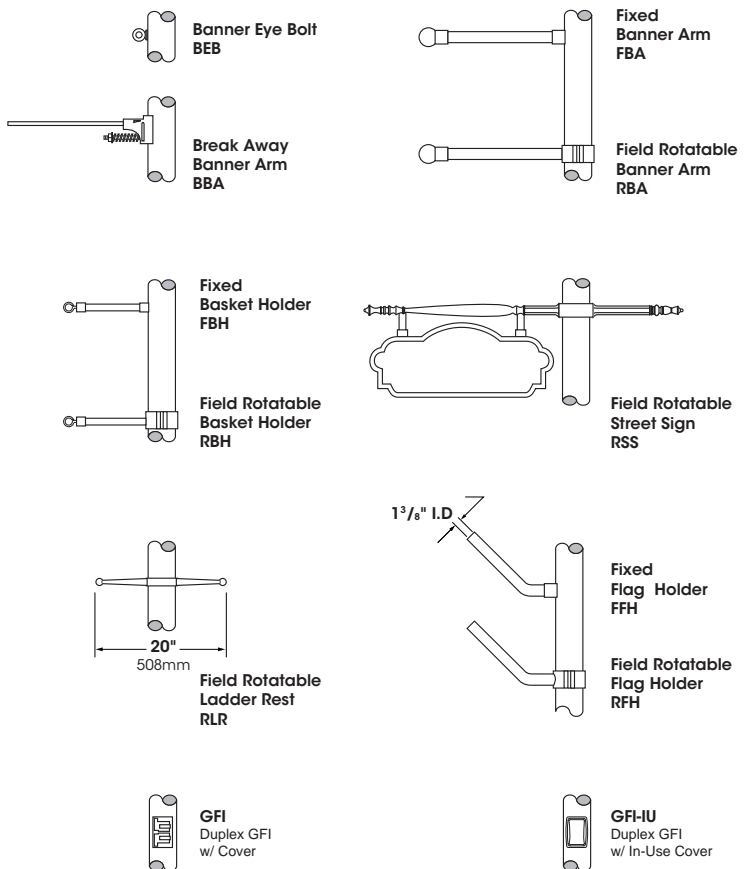

<https://www.usaltg.com/downloads/pdf/Pole-Arm-Accessories.pdf>

2024056

## SAMPLE ASSEMBLIES

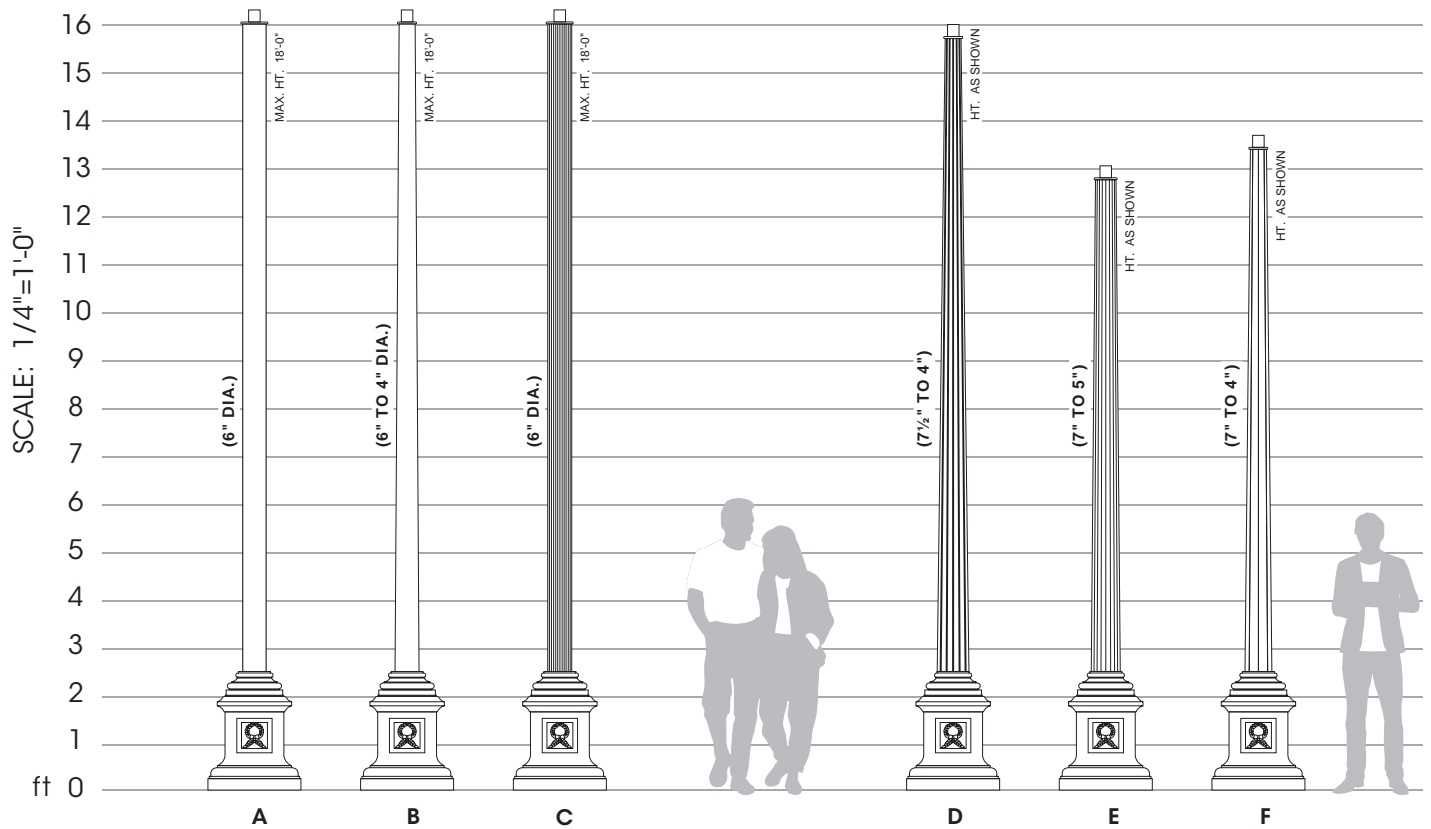

- A. 30-1090-XX-PT27/OPTIONS
- B. 30-1046T-XX-PT27/OPTIONS
- C. 30-1080-XX-PT27T/OPTIONS
- D. 30-1050C-XX-PT27/OPTIONS
- E. 30-1075C-XX-PT27/OPTIONS
- F. 30-1080C-XX-PT27/OPTIONS

**Note:** XX represents height, example 10 foot and 6 inches will be written as 10'-6": 30-1040-10'-6"-PT27/OPTIONS.

**Sample Assemblies show a small offering of the Sun Valley Line of Poles & Shafts.**

**Please visit [usaltg.com](http://usaltg.com) for the full product offering.**