

ROUND CONTEMPORARY COLUMN LIGHTING

**AXIM** Round Series

**Luminaire Head and Column Shaft**

Luminaire Head is comprised of heavy cast aluminum (A356 alloy, <0.2% copper) heatsink, base, and top cover. Four 316 stainless steel struts secure the top of the head to the base. Struts are a brushed finish to accent the luminaire or can be optionally color matched powdercoated. Luminaire head secures to the shaft using a hidden mounting mechanism which allows for rotation and fine adjustment of the head. No hardware is visible for the mounting of the luminaire head to the column shaft. Driver is accessible through a cover at the base of the luminaire head. Shaft is 3/16" wall T6063-T6 aluminum. Internal ring mechanism is integrated at top of column shaft for mounting luminaire head. 4" x 6" Integrated Hand Hole. Hardware is Stainless Steel.

**Anchorage**

Integrated 3/4" thick baseplate is circumferentially welded into shaft for internal mounting of column anchorage. Four 3/4" x 24" x 4" galvanized steel anchor bolts and hardware provided.

**PLED™ Optics**

Emitters (LED's) are arrayed on a metal core PCB panel with each emitter located on a copper thermal transfer pad and enclosed by an LED refractor. LED optics completely seal each individual emitter to meet an IP66 rating. In asymmetric distributions, a micro-reflector inside the refractor re-directs the house side emitter output towards the street side, maximizing usable light. Optional house side shields are available that cover each individual optic. Refractors are injection molded H12 acrylic. Each LED refractor is sealed to the PCB over an emitter and all refractors are retained by an aluminum frame. Any one Panel, or group of Panels in a luminaire, have the same optical pattern. LED refractors produce standard site/area distributions. Panels are field replaceable and field rotatable in 90° increments. Quick-disconnects are provided above each panel for fast field replacement. No lens (NL) and all flat lens options will provide "U0" no uplight optical packages that are Dark Sky friendly.

**Lenses**

No lens - Open Frame is standard for highest efficacy and U0 optics. Optional Clear Acrylic Lens (CA) provides high efficacy. Optional White Acrylic Lens (WA) provides glare control and general diffused lighting. Lenses are impact resistant, UV stable acrylic.

**LED Emitters**

LED thermal management is designed to maintain LED operating temperature below 90 °C, well below the manufacturers thermal max of 150 °C for long life, high lumen maintenance and color stability. High Power White LED's are driven between 350mA and 875mA for a maximum output of 2.5 Watts nominal. LED's are available in standard 2700K & 3000K, 4000K, or 5000K. All Standard LED's have a minimum of 70 CRI. Consult Factory for other LED options. Lumen Maintenance of L94 at 60,000 hours (TM-21 calculated at 6x Test Time).


**True Amber LED's** TRA-True Amber LED's emit light in the amber spectral bandwidth centered on 585-590nm. True Amber has negligible blue light and is suitable for wildlife.

**LED Driver**

Constant current electronic with a power factor of >.90 and a minimum operating temperature of -40°F/-40°C. Driver(s) is/are UL and cUL recognized. In-line terminal blocks facilitate wiring between the driver and optical arrays. Drivers accept an input of 120-277V, 50/60Hz or 347V-480V, 50,60Hz. (0 - 10V dimmable driver is standard. Driver has a minimum of 3KV internal surge protection. Luminaire supplied with 20KV surge protector for field installation.)

**Finish**

Super TGIC polyester powder coating is applied onto a metal substrate this has been pretreated with a four-stage process for maximum adhesion and color retention. The top coat is baked at 400° F for maximum hardness and exterior durability.

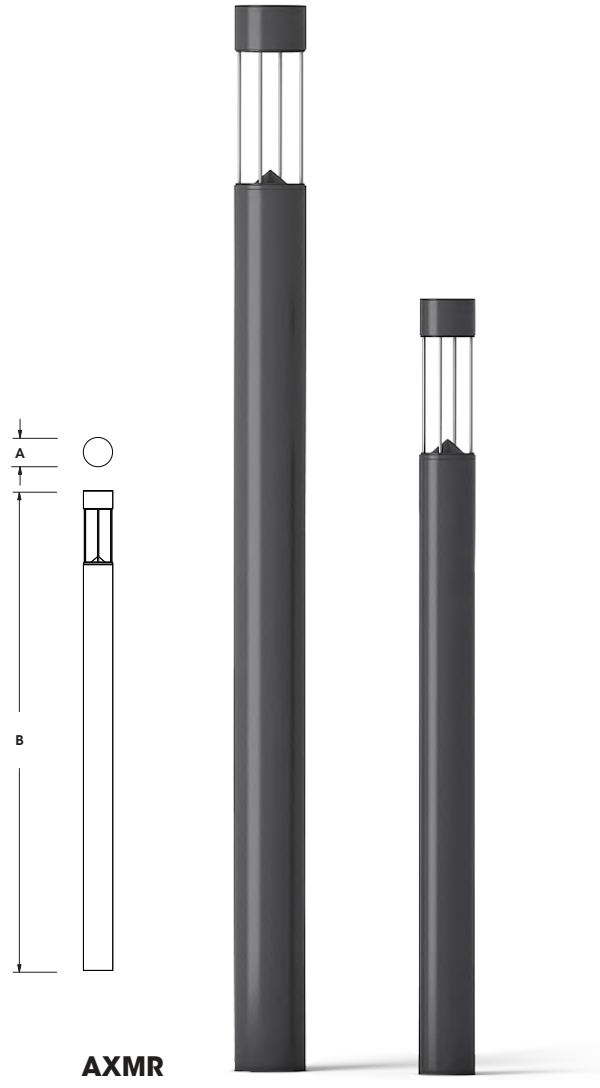

FIXTURE	A	B
<b>AXMR7</b>	7" 178mm	8' - 12' 2438mm - 3658mm
<b>AXMR9</b>	9" 229mm	10' - 16' 3048mm - 4877mm



BABA compliant



U.L. Listed for Wet Location

2024071

**SPECIFICATIONS**

**AXMR7**

Max Weight = 68lbs  
Max Height = 12'  
12 LED  
7 to 40 Watts

**PLED™**



12 LED Module

**AXMR9**

Max Weight = 105lbs  
Max Height = 16'  
20 LED  
11 to 66 Watts

**PLED™**




20 LED Module


**OPTIONS**

**LENS OPTIONS**


**Standard No Lens**  
Open Frame  
Highest Efficacy  
U0 Optics  
Area & Roadway



**Clear Acrylic - CA**  
High Efficacy  
Some Uplight  
Area & Roadway



**White Acrylic - WA**  
Lower Efficacy  
Higher Uplight  
General Diffused  
Low Glare




**STRUT OPTIONS**

Standard Struts  
are Brushed  
316 Stainless Steel  
  
Option to Match Struts to  
Shaft and Head  
Powdercoat Color - PS



**BOTTOM CAP OPTIONS**

Standard Conical  
Bottom Cap



Optional Flat  
Bottom Cap - FBC




**ORDERING INFORMATION**

Spec/Order Example: AXM9-12/PLED-III/20LED-525mA/40K/UNV/RUST-S/WA

Luminaire	Optics	# of LED's	Drive Current	CCT	Voltage	Finish	Options
<b>Luminaire</b>	<b>Optics</b>	<b>LED</b>			<b>Voltage</b>	<b>Finish</b>	<b>Options</b>
<b>AXMR7 (7" Dia.)</b>	<b>Area &amp; Roadway</b> For No Lens and CA Lens Option:	<input type="checkbox"/> 12LED	<input type="checkbox"/> 175mA <input type="checkbox"/> 350mA <input type="checkbox"/> 525mA <input type="checkbox"/> 700mA <input type="checkbox"/> 875mA <input type="checkbox"/> 1050mA	<input type="checkbox"/> 27K (2700K) <input type="checkbox"/> 30K (3000K) <input type="checkbox"/> 40K (4000K) <input type="checkbox"/> 50K (5000K) Consult Factory for Other LED Color, CCT, & CRI Options  <input type="checkbox"/> TRA True Amber*  *TRA Available only in 350mA and 525mA Drive Currents	<input type="checkbox"/> UNV (120-277) <input type="checkbox"/> 347 <input type="checkbox"/> 480	<b>Standard Textured Finish</b> <input type="checkbox"/> Black RAL-9005-T <input type="checkbox"/> White RAL-9003-T <input type="checkbox"/> Grey RAL-7004-T <input type="checkbox"/> Dark Bronze RAL-8019-T <input type="checkbox"/> Green RAL-6005-T  <b>Premium Finishes</b> <input type="checkbox"/> Rust <input type="checkbox"/> Patina Copper PC  For smooth finish replace suffix "T" with suffix "S" (Example: RAL-9500-S)  Consult factor for custom colors	<b>Lens Options:</b> (No Lens Open Frame is Standard) <input type="checkbox"/> Clear Acrylic CA <input type="checkbox"/> Opal Acrylic WA  <b>Strut Options:</b> (Brushed Stainless Steel is Standard) <input type="checkbox"/> Powdercoated Struts PS (Matched to Shaft)  <b>Bottom Cap Options:</b> (Conical Cap is Standard) <input type="checkbox"/> Flat Bottom Cap FBC  <input type="checkbox"/> Internal House Side Shield incl. LED Count (Example: HS-PLED/48) HS-PLED <input type="checkbox"/> Twist Lock Receptable Only TPR <input type="checkbox"/> 7-Pin Twist Lock Receptable Only TPR7 <input type="checkbox"/> High-Low Dimming for Switch by Others/Select Levels 50/100 or 25/100 (Example: HLSW/25) HLSW <input type="checkbox"/> Twist Lock Photocell + Voltage (Example: TPC347V) TPC+V <input type="checkbox"/> Single Fuse (Example: DF277V) SF+V <input type="checkbox"/> Double Fuse (Example: DF240V) DF+V <input type="checkbox"/> Blue-Tooth Programmable Photo/Motion Sensor (Factory - Motion 50/100; Photo 75fc) MS-F311
<b>AXMR9 (9" Dia.)</b>	<input type="checkbox"/> PLED-II <input type="checkbox"/> PLED-II-FR <input type="checkbox"/> PLED-III <input type="checkbox"/> PLED-III-W <input type="checkbox"/> PLED-IV <input type="checkbox"/> PLED-IV-FT <input type="checkbox"/> PLED-VSQ-N <input type="checkbox"/> PLED-VSQ-M <input type="checkbox"/> PLED-VSQ-W  For WA Lens Option: <input type="checkbox"/> PLED-ASY <input type="checkbox"/> PLED-ASY-HS (Internal HS) <input type="checkbox"/> PLED-SYM	<input type="checkbox"/> 20LED					

Consult Factory For Custom Heights

**OPTIONS (cont.)**

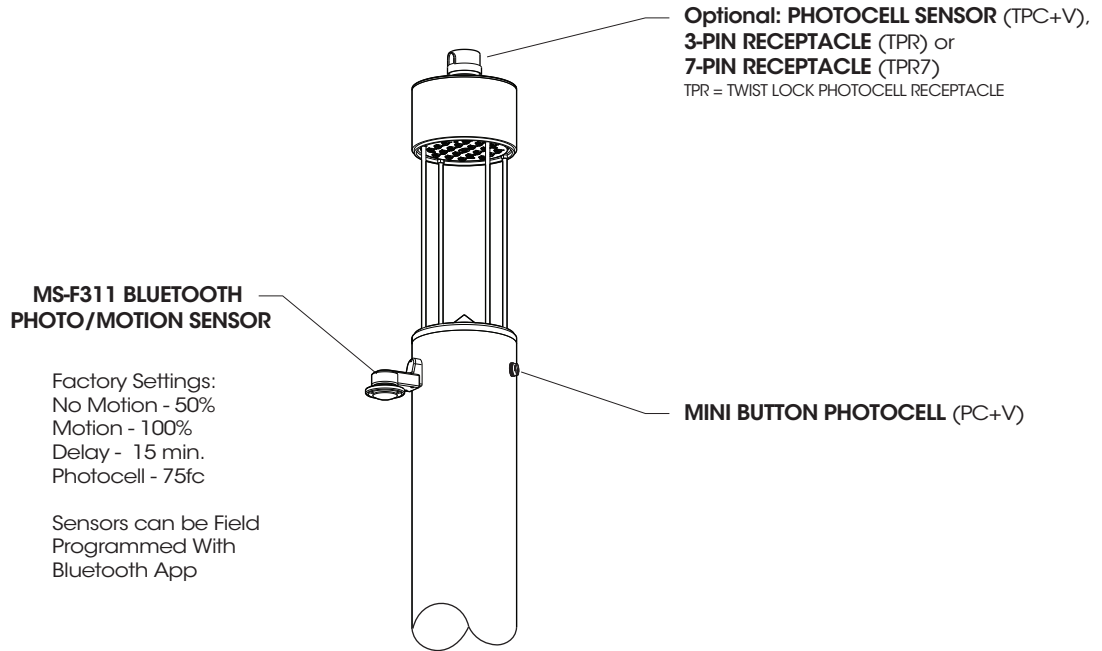


**High Low Dimming For Switches (HLSW)**

The HLSW is a small Electronic Switch which provides High Low Dimming Control through the LED Driver's 0-10V Control. Switching is done by adding a secondary AC Switched Hot Trigger Line to the HLSW in addition to the normal AC Power Line. When the Secondary Trigger Line is powered, the Fixture will go to 100% dimming. With no power to the Trigger, the Fixture will operate at 50% or 25% dimming. Switches for the Trigger Line can be a normal AC Switch/Breaker or Timed Switch/Breaker.

**Wireless and Other Fixture Controls**

Contact factory for Wireless and other Fixture Controls and recommendations. Most Controls can be integrated and factory Installed.

**LUMINAIRE INSTALLATION AND ACCESS DETAILS**

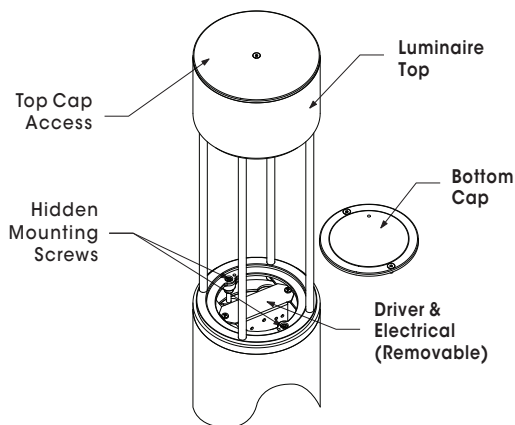


Luminaire Head is mounted to shaft by interting head by placing the mounting screws through cutouts on the internal shaft ring. Luminaire Head is then rotated into alignment. Proper alignment should be verified by way of the LED Module alignment and struts. The Mounting Screws are then tightened. Captive Track Nuts on the Mounting Screws retain the head to the internal ring.

Electrical connections can be before or after mounting the head by removing the Driver and Electrical Bracket.

Bottom Cap is screwed in place to seal the Luminaire and Electrical.

For Lensed versions, the Top Cap, Luminaire Top, and Lens are disassembled prior to mounting the top and to access electrical.

**ANCHORAGE DETAILS**

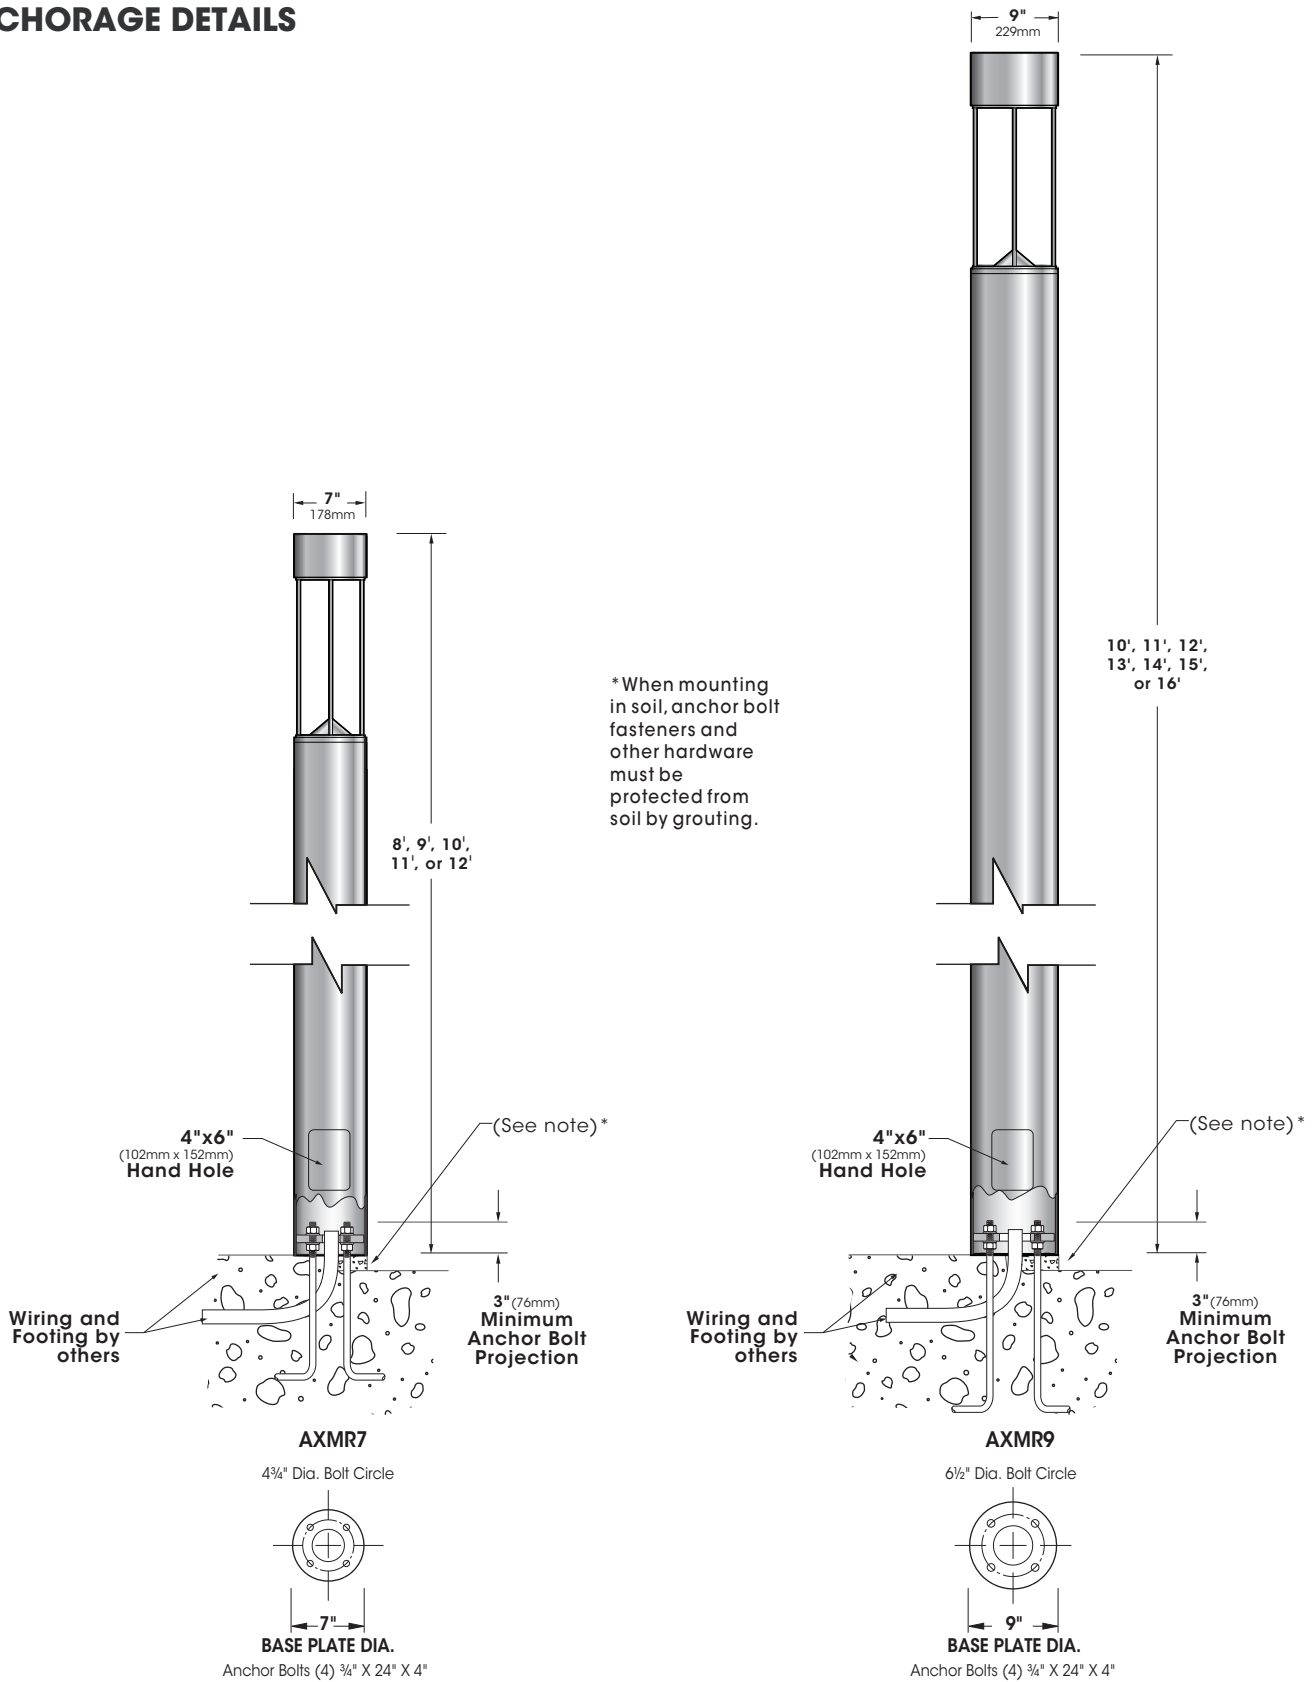

**ELECTRICAL DATA GUIDE - AMPERAGE CHART**

ELECTRICAL LOAD			CURRENT (A)				
# of LEDs	mA	System Watts	120V	208V	277V	347V	480V
12	175	6.5	0.05	0.03	0.02	0.02	0.01
12	350	13.0	0.11	0.06	0.05	0.04	0.03
12	525	20.0	0.17	0.10	0.07	0.06	0.04
12	700	26.0	0.22	0.13	0.09	0.07	0.05
12	875	33.0	0.28	0.16	0.12	0.10	0.07
12	1050	40.0	0.33	0.19	0.14	0.12	0.08
20	175	11.0	0.09	0.05	0.04	0.03	0.02
20	350	22.0	0.18	0.11	0.08	0.06	0.05
20	525	33.0	0.28	0.16	0.12	0.10	0.07
20	700	44.0	0.37	0.21	0.16	0.13	0.09
20	875	55.0	0.46	0.26	0.20	0.16	0.11
20	1050	66.0	0.55	0.32	0.24	0.19	0.14

**PHOTOMETRIC DATA GUIDE - LM-80 LUMEN MAINTENANCE**


LED LUMEN MAINTENANCE (350mA to 1050mA)		
LED Life / Operating Hours	Lumen Depreciation	Lumen Depreciation Scale Factor
60,000	L96	0.96x
100,000 (6X LED Test Hrs)	L93	0.93x
150,000 (Theoretical)	L89	0.90x
200,000 (Theoretical)	L86	0.87x

**TM-21 6x Test Time Dictates that L93 > 100,000 Hours.**

Lumen Depreciation Calculations Done in Accordance With IESNA TM-21 & LM-80 (25°C Ambient)

**PHOTOMETRIC GUIDE - ISOFOOTCANDLE PLOTS (AXMR7)**

**AXMR7-PLD-NL-12LED-1050mA-40K - 10' Height (No Lens Open Frame)**

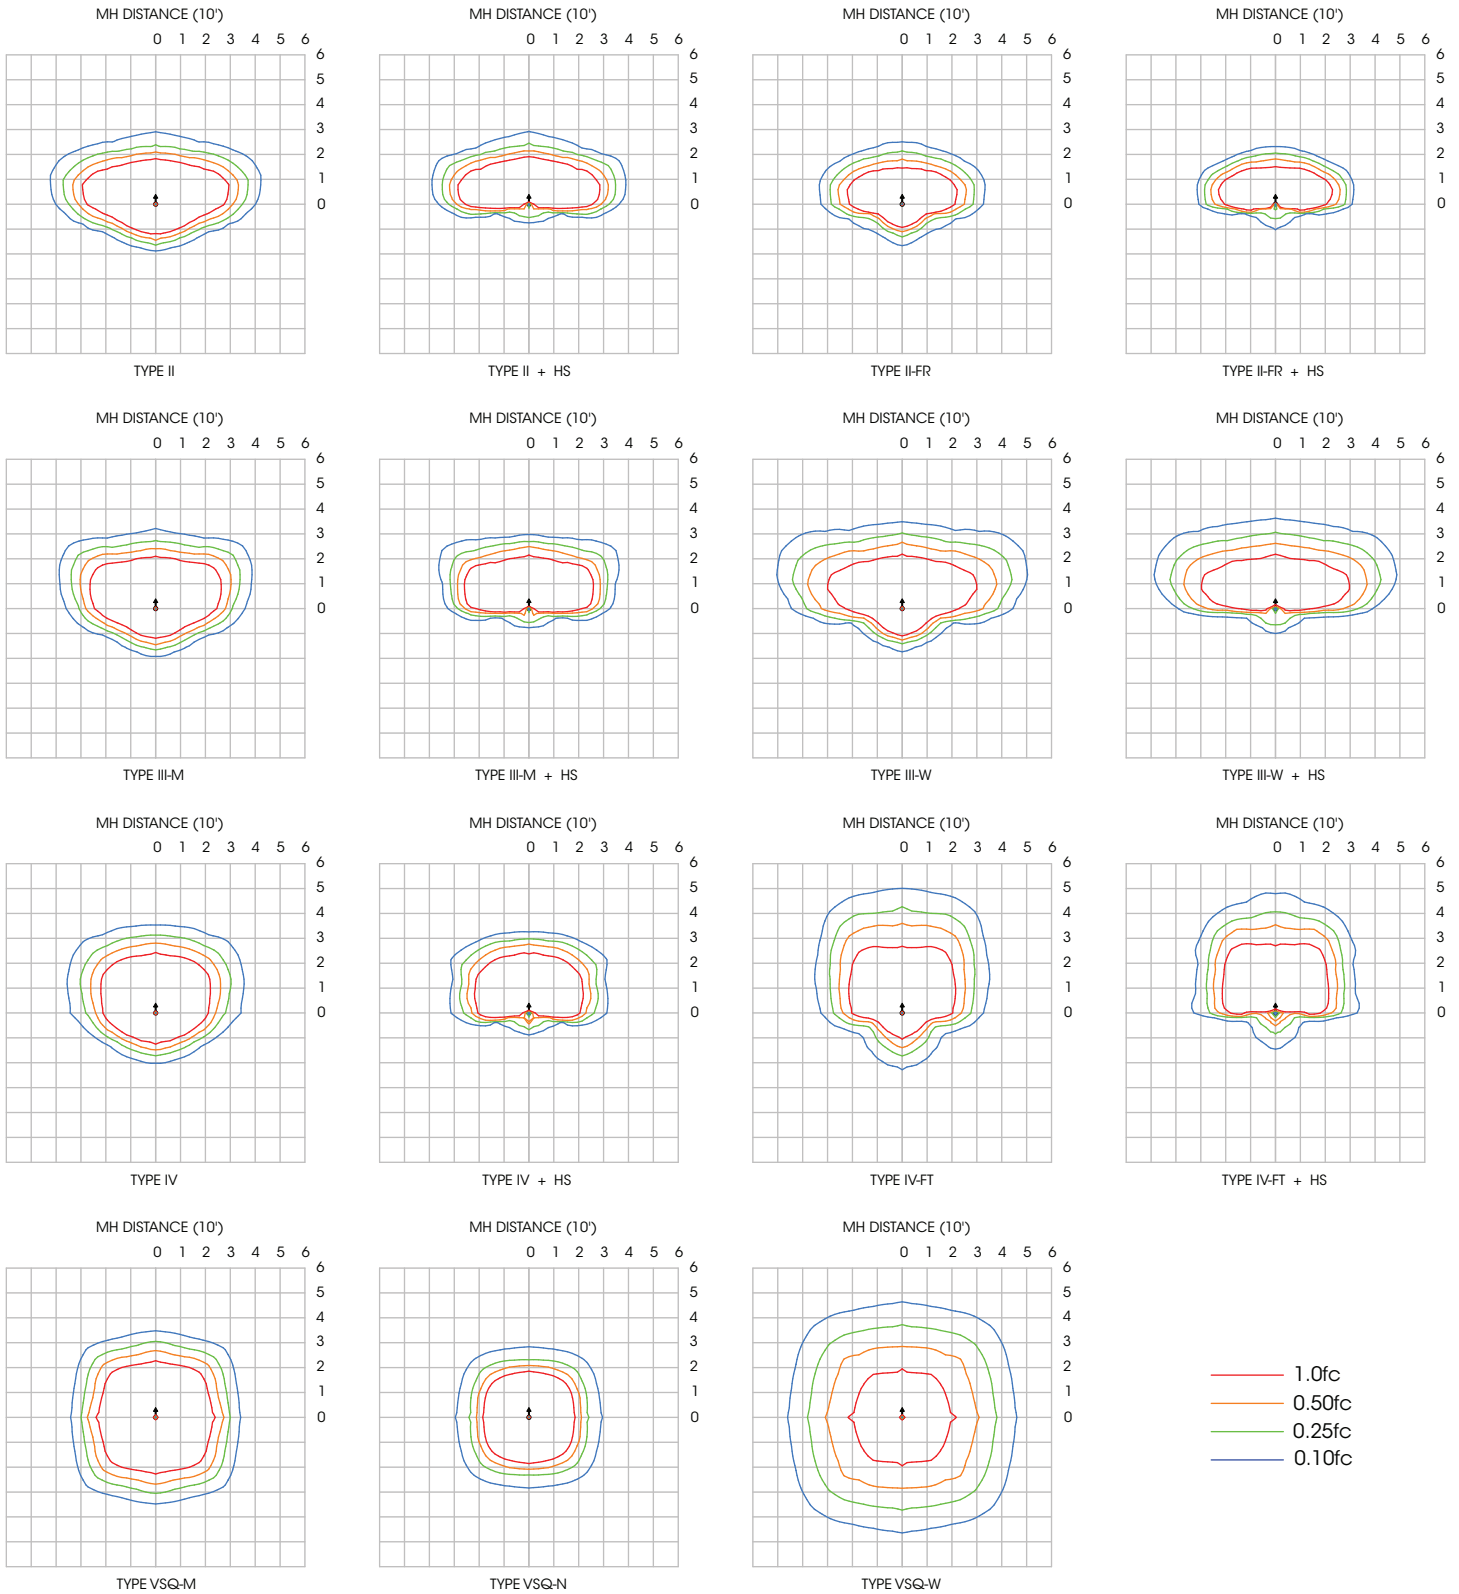

IES File downloads for this product can be found at [www.usaltg.com/downloads/columns.html](http://www.usaltg.com/downloads/columns.html)

**PHOTOMETRIC GUIDE - LUMEN TABLES (AXMR7)**

AXMR7-PLED-NL (No Lens Open Frame)																			
LED Count	Drive Current (mA)	System Watts	Dist/n Type	27K (2700K - 70CRI)			30K (3000K - 70CRI)			40K (4000K - 70CRI)			50K (5000K - 70CRI)			System Watts	TRA (590nm)		
				LUMENS	LPW	BUG RATING	LUMENS	LPW	BUG RATING	LUMENS	LPW	BUG RATING	LUMENS	LPW	BUG RATING		LUMENS	LPW	BUG RATING
12	175	6.5	II	924	142	B0-U0-G0	965	148	B0-U0-G0	1005	155	B0-U0-G0	1045	161	B0-U0-G0	5.0	362	72	B0-U0-G0
			II-FR	917	141	B0-U0-G0	957	147	B0-U0-G0	996	153	B0-U0-G0	1036	159	B0-U0-G0		359	72	B0-U0-G0
			III-M	925	142	B0-U0-G0	965	149	B0-U0-G0	1005	155	B0-U0-G0	1045	161	B0-U0-G0		362	72	B0-U0-G0
			III-W	842	129	B0-U0-G1	878	135	B0-U0-G1	915	141	B0-U0-G1	951	146	B0-U0-G1		329	66	B0-U0-G0
			IV	936	144	B0-U0-G0	977	150	B0-U0-G0	1018	157	B0-U0-G0	1058	163	B0-U0-G0		366	73	B0-U0-G0
			IV-FT	840	129	B0-U0-G1	877	135	B0-U0-G1	913	141	B0-U0-G1	950	146	B0-U0-G1		329	66	B0-U0-G0
			VSQ-N	961	148	B1-U0-G0	1003	154	B1-U0-G0	1045	161	B1-U0-G0	1086	167	B1-U0-G0		376	75	B0-U0-G0
			VSQ-M	961	148	B1-U0-G0	1002	154	B1-U0-G0	1044	161	B1-U0-G0	1086	167	B1-U0-G0		376	75	B0-U0-G0
			VSQ-W	940	145	B1-U0-G1	981	151	B1-U0-G1	1022	157	B1-U0-G1	1062	163	B1-U0-G1		368	74	B1-U0-G0
			I-HS	670	103	B0-U0-G0	700	108	B0-U0-G0	729	112	B0-U0-G0	757	116	B0-U0-G0		262	52	B0-U0-G0
			II-FR-HS	691	106	B0-U0-G0	721	111	B0-U0-G0	751	115	B0-U0-G0	780	120	B0-U0-G0		270	54	B0-U0-G0
			III-M-HS	672	103	B0-U0-G0	701	108	B0-U0-G0	730	112	B0-U0-G0	759	117	B0-U0-G0		263	53	B0-U0-G0
			III-W-HS	669	103	B0-U0-G1	699	107	B0-U0-G1	727	112	B0-U0-G1	756	116	B0-U0-G1		262	52	B0-U0-G0
			IV-HS	696	107	B0-U0-G0	726	112	B0-U0-G0	756	116	B0-U0-G0	786	121	B0-U0-G0		272	54	B0-U0-G0
			IV-FT-HS	664	102	B0-U0-G1	694	107	B0-U0-G1	722	111	B0-U0-G1	751	115	B0-U0-G1		260	52	B0-U0-G0
12	350	13.0	II	1680	129	B1-U0-G1	1754	135	B1-U0-G1	1826	140	B1-U0-G1	1899	146	B1-U0-G1	10.0	584	58	B0-U0-G0
			II-FR	1666	128	B1-U0-G0	1739	134	B1-U0-G0	1812	139	B1-U0-G0	1884	145	B1-U0-G0		580	58	B0-U0-G0
			III-M	1680	129	B1-U0-G1	1753	135	B1-U0-G1	1826	140	B1-U0-G1	1899	146	B1-U0-G1		584	58	B0-U0-G0
			III-W	1530	118	B0-U0-G1	1596	123	B0-U0-G1	1663	128	B0-U0-G1	1729	133	B0-U0-G1		532	53	B0-U0-G1
			IV	1702	131	B1-U0-G1	1776	137	B1-U0-G1	1850	142	B1-U0-G1	1924	148	B1-U0-G1		592	59	B0-U0-G0
			IV-FT	1527	117	B0-U0-G1	1594	123	B0-U0-G1	1660	128	B0-U0-G1	1726	133	B0-U0-G1		531	53	B0-U0-G1
			VSQ-N	1748	134	B1-U0-G0	1824	140	B1-U0-G0	1899	146	B1-U0-G0	1975	152	B1-U0-G0		608	61	B0-U0-G0
			VSQ-M	1746	134	B1-U0-G0	1822	140	B1-U0-G0	1898	146	B1-U0-G0	1974	152	B1-U0-G0		607	61	B1-U0-G0
			VSQ-W	1708	131	B2-U0-G1	1782	137	B2-U0-G1	1857	143	B2-U0-G1	1931	149	B2-U0-G1		594	59	B1-U0-G1
			I-HS	1218	94	B0-U0-G0	1271	98	B0-U0-G0	1324	102	B0-U0-G0	1377	106	B0-U0-G0		424	42	B0-U0-G0
			II-FR-HS	1255	97	B0-U0-G0	1309	101	B0-U0-G0	1364	105	B0-U0-G0	1418	109	B0-U0-G0		437	44	B0-U0-G0
			III-M-HS	1221	94	B0-U0-G0	1274	98	B0-U0-G0	1327	102	B0-U0-G0	1379	106	B0-U0-G0		424	42	B0-U0-G0
			III-W-HS	1216	94	B0-U0-G1	1270	98	B0-U0-G1	1322	102	B0-U0-G1	1375	106	B0-U0-G1		423	42	B0-U0-G0
			IV-HS	1264	97	B0-U0-G0	1319	101	B0-U0-G0	1374	106	B0-U0-G0	1429	110	B0-U0-G0		439	44	B0-U0-G0
			IV-FT-HS	1288	93	B0-U0-G1	1260	97	B0-U0-G1	1312	101	B0-U0-G1	1365	105	B0-U0-G1		420	42	B0-U0-G1
12	525	20.0	II	2414	121	B1-U0-G1	2520	126	B1-U0-G1	2624	131	B1-U0-G1	2729	136	B1-U0-G1	15.0	682	45	B0-U0-G0
			II-FR	2394	120	B1-U0-G0	2499	125	B1-U0-G0	2603	130	B1-U0-G0	2707	135	B1-U0-G0		677	45	B0-U0-G0
			III-M	2414	121	B1-U0-G1	2519	126	B1-U0-G1	2624	131	B1-U0-G1	2729	136	B1-U0-G1		682	45	B0-U0-G0
			III-W	2198	110	B1-U0-G1	2294	115	B1-U0-G1	2389	119	B1-U0-G1	2485	124	B1-U0-G1		621	41	B0-U0-G1
			IV	2446	122	B1-U0-G1	2553	128	B1-U0-G1	2659	133	B1-U0-G1	2765	138	B1-U0-G1		691	46	B0-U0-G0
			IV-FT	2194	110	B1-U0-G1	2290	115	B1-U0-G1	2385	119	B1-U0-G1	2481	124	B1-U0-G1		620	41	B0-U0-G1
			VSQ-N	2511	126	B1-U0-G0	2620	131	B1-U0-G0	2730	136	B1-U0-G0	2839	142	B1-U0-G0		710	47	B1-U0-G0
			VSQ-M	2509	125	B2-U0-G1	2619	131	B2-U0-G1	2728	136	B2-U0-G1	2836	142	B2-U0-G1		709	47	B1-U0-G0
			VSQ-W	2455	123	B2-U0-G1	2561	128	B2-U0-G1	2668	133	B2-U0-G1	2775	139	B2-U0-G1		694	46	B1-U0-G1
			I-HS	1751	88	B0-U0-G1	1827	91	B0-U0-G1	1903	95	B0-U0-G1	1979	99	B0-U0-G1		495	33	B0-U0-G0
			II-FR-HS	1803	90	B0-U0-G0	1882	94	B0-U0-G0	1960	98	B0-U0-G0	2038	102	B0-U0-G0		510	34	B0-U0-G0
			III-M-HS	1754	88	B0-U0-G1	1830	92	B0-U0-G1	1906	95	B0-U0-G1	1982	99	B0-U0-G1		496	33	B0-U0-G0
			III-W-HS	1748	87	B0-U0-G1	1825	91	B0-U0-G1	1900	95	B0-U0-G1	1976	99	B0-U0-G1		494	33	B0-U0-G1
			IV-HS	1816	91	B0-U0-G1	1896	95	B0-U0-G1	1975	99	B0-U0-G1	2053	103	B0-U0-G1		513	34	B0-U0-G0
			IV-FT-HS	1735	87	B0-U0-G1	1811	91	B0-U0-G1	1886	94	B0-U0-G1	1961	98	B0-U0-G1		490	33	B0-U0-G1
12	700	26.0	II	3056	118	B1-U0-G1	3189	123	B1-U0-G1	3322	128	B1-U0-G1	3455	133	B1-U0-G1	N/A	N/A		
			II-FR	3032	117	B1-U0-G1	3163	122	B1-U0-G1	3295	127	B1-U0-G1	3427	132	B1-U0-G1				
			III-M	3056	118	B1-U0-G1	3190	123	B1-U0-G1	3322	128	B1-U0-G1	3455	133	B1-U0-G1				
			III-W	2783	107	B1-U0-G1	2903	112	B1-U0-G1	3024	116	B1-U0-G1	3145	121	B1-U0-G1				
			IV	3097	119	B1-U0-G1	3231	124	B1-U0-G1	3366	129	B1-U0-G1	3500	135	B1-U0-G1				
			IV-FT	2778	107	B1-U0-G1	2899	111	B1-U0-G1	3020	116	B1-U0-G1	3140	121	B1-U0-G1				
			VSQ-N	3179	122	B2-U0-G0	3317	128	B2-U0-G0	3455	133	B2-U0-G0	3594	138	B2-U0-G0				
			VSQ-M	3177	122	B2-U0-G1	3315	127	B2-U0-G1	3453	133	B2-U0-G1	3591	138	B2-U0-G1				
			VSQ-W	3107	120	B2-U0-G1	3242	125	B2-U0-G1	3378	130	B3-U0-G1	3513	135	B3-U0-G1				
			I-HS	2216	85	B0-U0-G1	2313	89	B0-U0-G1	2409	93	B0-U0-G1	2505	96	B0-U0-G1				
			II-FR-HS	2283	88	B0-U0-G0	2382	92	B0-U0-G0	2481	95	B0-U0-G0	2580	99	B0-U0-G0				
			III-M-HS	2220	85	B0-U0-G1	2317	89	B0-U0-G1	2413	93	B0-U0-G1	2510	97	B0-U0-G1				
			III-W-HS	2213	85	B0-U0-G1	2310	89	B0-U0-G1	2405	93	B0-U0-G1	2501	96	B0-U0-G1				
			IV-HS	2300	88	B0-U0-G1	2400	92	B0-U0-G1	2500	96	B0-U0-G1	2599	100	B0-U0-G1				
			IV-FT-HS	2197	84	B0-U0-G1	2292	88	B0-U0-G1	2388	92	B0-U0-G1	2483	95	B0-U0-G1				
12	875	33.0	II	3663	111	B1-U0-G1	3823	116	B1-U0-G1	3982	121	B1-U0-G1	4141	125	B1-U0-G1	N/A	N/A		
			II-FR	3633	110	B1-U0-G1	3791	115	B1-U0-G1	3949	120	B1-U0-G1	4107	124	B1-U0-G1				
			III-M	3663	111	B1-U0-G1	3823	116	B1-U0-G1	3982	121	B1-U0-G1	4141	125	B1-U0-G1				
			III-W	3335	101	B1-U0-G1	3480	105	B1-U0-G1	3625	110	B1-U0-G1	3770	114	B1-U0-G1				
			IV	3711	112	B1-U0-G1	3872	117	B1-U0-G1	4034	122	B1-U0-G1	4195	127	B1-U0-G1				
			IV-FT	3329	101	B1-U0-G1	3474	105	B1-U0-G1	3619	110	B1-U0-G2	3764	114	B1-U0-G2				
			VSQ-N	3810	115	B2-U0-G0	3975	120	B2-U0-G0	4141	125	B2-U0-G0	4306	130	B2-U0-G1				
			VSQ-M	3807	115	B2-U0-G1	3973	120	B2-U0-G1	4138	125	B2-U0-G1	4304	130	B3-U0-G1				
			VSQ-W	3724	113	B3-U0-G1	3885	118	B3-U0-G1	4047	123	B3-U0-G1	4209	128	B3-U0-G1				
			I-HS	2656	80	B0-U0-G1	2771	84	B0-U0-G1	2887	87	B0-U0-G1	3002	91	B0-U0-G1				
			II-FR-HS	2736	83	B0-U0-G0	2855	87	B0-U0-G0	2973	90	B0-U0-G0	3092	94	B0-U0-G0				
			III-M-HS	2661	81	B0-U0-G1	2777	84	B0-U0-G1	2892	88	B0-U0-G1	3008	91	B0-U0-G1				
			III-W-HS	2652	80	B0-U0-G1	2768	84	B0-U0-G1	2883	87	B0-U0-G1	2997	91	B0-U0-G1				
			IV-HS	2756	84	B0-U0-G1	2876	87	B0-U0-G1	2996	91	B0-U0-G1	3115	94	B0-U0-G1				
			IV-FT-HS	2632	80	B0-U0-G1	2747	83	B0-U0-G1	2861	87	B0-U0-G1	2976	90	B0-U0-G1				
12	1050	40.0	II	4167	104	B1-U0-G1	4348	109	B1-U0										

**PHOTOMETRIC GUIDE - LUMEN TABLES (AXMR7)**


**AXMR7-PLD-CA (Clear Acrylic Lens)**

LED Count	Drive Current (mA)	System Watts	Dist'n Type	27K (2700K - 70CRI)												30K (3000K - 70CRI)			40K (4000K - 70CRI)			50K (5000K - 70CRI)			System Watts	TRA (590nm)		
				LUMENS			LPW			BUG RATING			LUMENS	LPW	BUG RATING	LUMENS	LPW	BUG RATING	LUMENS	LPW	BUG RATING	LUMENS	LPW	BUG RATING				
				LUMENS	LPW	BUG RATING	LUMENS	LPW	BUG RATING	LUMENS	LPW	BUG RATING	LUMENS	LPW	BUG RATING	LUMENS	LPW	BUG RATING	LUMENS	LPW	BUG RATING	LUMENS	LPW	BUG RATING				
12	175	6.5	II	895	138	B0-U1-G0	934	144	B0-U1-G0	972	150	B0-U1-G0	1011	156	B0-U1-G0	1050	162	B0-U1-G0	5.0	348	70	B0-U0-G0						
			IIFR	875	135	B0-U1-G0	912	140	B0-U1-G0	950	146	B0-U1-G0	988	152	B0-U1-G0	1026	158	B0-U1-G0	1064	164	B0-U1-G0	5.0	340	68	B0-U0-G0			
			IIIM	872	134	B0-U1-G0	910	140	B0-U1-G0	948	146	B0-U1-G0	986	152	B0-U1-G0	1024	158	B0-U1-G0	1062	164	B0-U1-G0	5.0	339	68	B0-U0-G0			
			IIIW	779	120	B0-U1-G1	813	125	B0-U1-G1	846	130	B0-U1-G1	879	135	B0-U1-G1	912	140	B0-U1-G1	945	145	B0-U1-G1	5.0	303	61	B0-U0-G0			
			IV	909	140	B0-U1-G0	948	146	B0-U1-G0	987	152	B0-U1-G0	1026	158	B0-U1-G0	1065	164	B0-U1-G0	1104	172	B0-U1-G0	5.0	353	71	B0-U0-G0			
			IVFT	804	124	B0-U1-G1	839	129	B0-U1-G1	873	134	B0-U1-G1	908	140	B0-U1-G1	943	146	B0-U1-G1	978	152	B0-U1-G1	5.0	312	62	B0-U0-G0			
			VSQ-N	922	142	B1-U1-G0	962	148	B1-U1-G0	1001	154	B1-U1-G0	1041	160	B1-U1-G0	1081	166	B1-U1-G0	1121	172	B1-U1-G0	5.0	358	72	B0-U0-G0			
			VSQ-M	937	144	B1-U1-G0	977	150	B1-U1-G0	1018	157	B1-U1-G0	1058	163	B1-U1-G0	1099	170	B1-U1-G0	1139	176	B1-U1-G0	5.0	364	73	B0-U0-G0			
			VSQ-W	907	140	B1-U1-G1	946	146	B1-U1-G1	985	152	B1-U1-G1	1024	158	B1-U1-G1	1064	164	B1-U1-G1	1104	172	B1-U1-G1	5.0	353	71	B0-U0-G0			
			IHS	645	99	B0-U1-G0	673	104	B0-U1-G0	701	108	B0-U1-G0	728	112	B0-U1-G0	756	116	B0-U1-G0	784	120	B0-U1-G0	5.0	250	50	B0-U0-G0			
			IIFRHS	675	104	B0-U1-G0	704	108	B0-U1-G0	733	113	B0-U1-G0	762	117	B0-U1-G0	791	121	B0-U1-G0	820	125	B0-U1-G0	5.0	262	52	B0-U0-G0			
			IIIMHS	645	99	B0-U1-G0	673	103	B0-U1-G0	700	108	B0-U1-G0	728	112	B0-U1-G0	756	116	B0-U1-G0	784	120	B0-U1-G0	5.0	250	50	B0-U0-G0			
			IIWHS	647	100	B0-U1-G1	676	104	B0-U1-G1	704	108	B0-U1-G1	732	113	B0-U1-G1	760	117	B0-U1-G1	788	121	B0-U1-G1	5.0	252	50	B0-U0-G0			
			IVHS	661	102	B0-U1-G0	690	106	B0-U1-G0	718	111	B0-U1-G0	746	115	B0-U1-G0	774	119	B0-U1-G0	802	123	B0-U1-G0	5.0	257	51	B0-U0-G0			
			IVFTHS	647	100	B0-U1-G1	676	104	B0-U1-G1	704	108	B0-U1-G1	732	113	B0-U1-G1	760	117	B0-U1-G1	788	121	B0-U1-G1	5.0	252	50	B0-U0-G0			
			II	1622	125	B1-U1-G1	1693	130	B1-U1-G1	1763	136	B1-U1-G1	1833	141	B1-U1-G1	1903	147	B1-U1-G1	1974	153	B1-U1-G1	5.0	562	56	B0-U0-G0			
			12	350	13.0	IIFR	1585	122	B1-U1-G0	1654	127	B1-U1-G0	1722	132	B1-U1-G0	1791	138	B1-U1-G0	1860	144	B1-U1-G0	10.0	549	55	B0-U0-G0			
						IIIM	1581	122	B1-U1-G1	1649	127	B1-U1-G1	1718	132	B1-U1-G1	1786	137	B1-U1-G1	1855	142	B1-U1-G1	1924	148	B1-U1-G1	10.0	548	55	B0-U0-G0
						IIIW	1411	109	B0-U1-G1	1472	113	B0-U1-G1	1533	118	B0-U1-G1	1594	123	B0-U1-G1	1655	128	B0-U1-G1	1716	133	B0-U1-G1	10.0	489	49	B0-U0-G1
IV	1647	127				B1-U1-G1	1719	132	B1-U1-G1	1790	138	B1-U1-G1	1861	143	B1-U1-G1	1932	148	B1-U1-G1	2003	153	B1-U1-G1	10.0	571	57	B0-U0-G0			
IVFT	1456	112				B0-U1-G1	1519	117	B0-U1-G1	1582	122	B0-U1-G1	1645	127	B0-U1-G1	1708	132	B0-U1-G1	1771	137	B0-U1-G1	10.0	504	50	B0-U0-G1			
VSQ-N	1670	128				B1-U1-G0	1743	134	B1-U1-G0	1815	140	B1-U1-G0	1887	145	B1-U1-G0	1959	150	B1-U1-G0	2031	156	B1-U1-G0	10.0	579	58	B0-U0-G0			
VSQ-M	1698	131				B1-U1-G0	1772	136	B1-U1-G0	1846	142	B1-U1-G0	1919	148	B1-U1-G0	1993	154	B1-U1-G0	2067	160	B1-U1-G0	10.0	589	59	B1-U0-G0			
VSQ-W	1644	126				B2-U1-G1	1716	132	B2-U1-G1	1787	137	B2-U1-G1	1858	143	B2-U1-G1	1929	148	B2-U1-G1	2000	154	B2-U1-G1	10.0	570	57	B1-U0-G1			
IHS	1168	90				B0-U1-G0	1219	94	B0-U1-G0	1269	98	B0-U1-G0	1320	102	B0-U1-G0	1370	106	B0-U1-G0	1421	110	B0-U1-G0	10.0	404	40	B0-U0-G0			
IIFRHS	1223	94				B0-U1-G0	1276	98	B0-U1-G0	1329	102	B0-U1-G0	1381	106	B0-U1-G0	1434	110	B0-U1-G0	1487	114	B0-U1-G0	10.0	424	42	B0-U0-G0			
IIIMHS	1167	90				B0-U1-G0	1218	94	B0-U1-G0	1268	98	B0-U1-G0	1319	101	B0-U1-G0	1370	105	B0-U1-G0	1421	109	B0-U1-G0	10.0	404	40	B0-U0-G0			
IIWHS	1174	90				B0-U1-G1	1225	94	B0-U1-G1	1276	98	B0-U1-G1	1327	102	B0-U1-G1	1378	106	B0-U1-G1	1429	110	B0-U1-G1	10.0	407	41	B0-U0-G0			
IVHS	1198	92				B0-U1-G0	1250	96	B0-U1-G0	1301	100	B0-U1-G0	1353	104	B0-U1-G0	1404	108	B0-U1-G0	1455	112	B0-U1-G0	10.0	415	41	B0-U0-G0			
IVFTHS	1174	90				B0-U1-G1	1225	94	B0-U1-G1	1276	98	B0-U1-G1	1327	102	B0-U1-G1	1378	106	B0-U1-G1	1429	110	B0-U1-G1	10.0	408	41	B0-U0-G1			
II	2328	116				B1-U1-G1	2429	121	B1-U1-G1	2530	127	B1-U1-G1	2631	132	B1-U1-G1	2732	137	B1-U1-G1	2833	143	B1-U1-G1	10.0	666	44	B0-U0-G0			
IIFR	2275	114				B1-U1-G0	2373	119	B1-U1-G0	2472	124	B1-U1-G0	2570	129	B1-U1-G0	2669	134	B1-U1-G0	2768	139	B1-U1-G0	10.0	641	43	B0-U0-G0			
IIIM	2269	113				B1-U1-G1	2368	118	B1-U1-G1	2466	123	B1-U1-G1	2564	128	B1-U1-G1	2663	133	B1-U1-G1	2762	138	B1-U1-G1	10.0	640	43	B0-U0-G0			
IIIW	2025	101				B1-U1-G1	2113	106	B1-U1-G1	2200	110	B1-U1-G1	2288	114	B1-U1-G1	2377	119	B1-U1-G1	2466	123	B1-U1-G1	10.0	570	38	B0-U0-G1			
IV	2364	118				B1-U1-G1	2467	123	B1-U1-G1	2569	128	B1-U1-G1	2672	134	B1-U1-G1	2775	139	B1-U1-G1	2878	144	B1-U1-G1	10.0	666	44	B0-U0-G0			
IVFT	2090	104	B1-U1-G1	2181	109	B1-U1-G1	2271	114	B1-U1-G1	2362	118	B1-U1-G1	2453	123	B1-U1-G1	2544	128	B1-U1-G1	10.0	589	39	B0-U0-G1						
VSQ-N	2397	120	B1-U1-G0	2502	125	B1-U1-G0	2605	130	B1-U1-G0	2709	135	B1-U1-G0	2813	140	B1-U1-G0	2917	145	B1-U1-G0	10.0	676	45	B1-U0-G0						
VSQ-M	2438	122	B2-U1-G1	2544	127	B2-U1-G1	2649	132	B2-U1-G1	2755	138	B2-U1-G1	2860	143	B2-U1-G1	2966	148	B2-U1-G1	10.0	687	46	B1-U0-G0						
VSQ-W	2316	118	B2-U1-G1	2463	123	B2-U1-G1	2566	128	B2-U1-G1	2668	133	B2-U1-G1	2770	138	B2-U1-G1	2873	143	B2-U1-G1	10.0	666	44	B1-U0-G1						
IHS	1676	84	B0-U1-G0	1749	87	B0-U1-G0	1821	91	B0-U1-G0	1894	95	B0-U1-G0	1967	99	B0-U1-G0	2040	103	B0-U1-G0	10.0	472	31	B0-U0-G0						
IIFRHS	1755	88	B0-U1-G0	1831	92	B0-U1-G0	1907	95	B0-U1-G0	1983	99	B0-U1-G0	2059	103	B0-U1-G0	2135	107	B0-U1-G0	10.0	495	33	B0-U0-G0						
IIIMHS	1675	84	B0-U1-G1	1748	87	B0-U1-G1	1820	91	B0-U1-G1	1893	95	B0-U1-G1	1966	99	B0-U1-G1	2039	103	B0-U1-G1	10.0	472	31	B0-U0-G0						
IIWHS	1686	84	B0-U1-G1	1760	88	B0-U1-G1	1833	92	B0-U1-G1	1905	95	B0-U1-G1	1978	99	B0-U1-G1	2051	103	B0-U1-G1	10.0	476	32	B0-U0-G0						
IVHS	1719	86	B0-U1-G0	1794	90	B0-U1-G0	1868	93	B0-U1-G0	1942	97	B0-U1-G0	2016	101	B0-U1-G0	2090	105	B0-U1-G0	10.0	484	32	B0-U0-G0						
IVFTHS	1685	84	B0-U1-G1	1759	88	B0-U1-G1	1832	92	B0-U1-G1	1905	95	B0-U1-G1	1978	99	B0-U1-G1	2051	103	B0-U1-G1	10.0	476	32	B0-U0-G1						
12	525	20.0	II	2952	114	B1-U1-G1	3079	118	B1-U1-G1	3207	123	B1-U1-G1	3335	128	B1-U1-G1	3463	133	B1-U1-G1	15.0	666	44	B0-U0-G0						
			IIFR	2884	111	B1-U2-G1	3009	116	B1-U2-G1	3134	121	B1-U2-G1	3258	125	B1-U2-G1	3383	130	B1-U2-G1	3507	135	B1-U2-G1	15.0	641	43	B0-U0-G0			
			IIIM	2877	111	B1-U1-G1	3001	115	B1-U1-G1	3126	120	B1-U1-G1	3251	125	B1-U1-G1	3376	130	B1-U1-G1	3501	135	B1-U1-G1	15.0	640	43	B0-U0-G0			
			IIIW	2567	99	B1-U1-G1	2678	103	B1-U1-G1	2789	107	B1-U1-G1	2900	112	B1-U1-G1	3011	116	B1-U1-G1	3122	121	B1-U1-G1	15.0	570	38	B0-U0-G1			
			IV	2997	115	B1-U1-G1	3127	120	B1-U1-G1	3256	125	B1-U1-G1	3386	130	B1-U1-G1	3515	135	B1-U1-G1	3645	140	B1-U1-G1	15.0	666	44	B0-U0-G0			
			IVFT	2650	102	B1-U1-G1	2765																					



**PHOTOMETRIC GUIDE - ISOFOOTCANDLE PLOTS (AXMR7)**

**AXMR7-PLED-WA-12LED-1050mA-40K - 10' Height (White Acrylic Lens)**

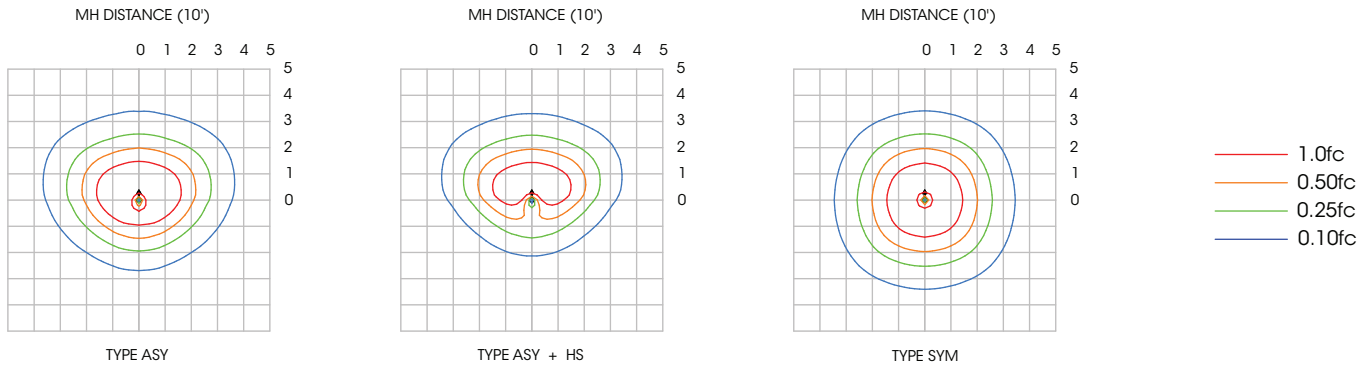


**PHOTOMETRIC GUIDE - LUMEN TABLES (AXMR7)**

AXMR7-PLED-WA (White Acrylic Lens)																			
LED Count	Drive Current (mA)	System Watts	Dist'n Type	27K (2700K - 70CRI)			30K (3000K - 70CRI)			40K (4000K - 70CRI)			50K (5000K - 70CRI)			System Watts	TRA (590nm)		
				LUMENS	LPW	BUG RATING	LUMENS	LPW	BUG RATING	LUMENS	LPW	BUG RATING	LUMENS	LPW	BUG RATING		LUMENS	LPW	BUG RATING
12	175	6.5	ASY	734	108	B0-U3-G1	734	113	B0-U3-G1	764	118	B0-U3-G1	794	122	B0-U3-G1	5.0	275	55	B0-U3-G1
			SYM	741	114	B0-U3-G1	773	119	B1-U3-G1	805	124	B1-U3-G1	837	129	B1-U3-G1		290	58	B0-U3-G1
			ASY-HS	530	82	B0-U3-G1	554	85	B0-U3-G1	577	89	B0-U3-G1	599	92	B0-U3-G1		207	41	B0-U2-G1
12	350	13.0	ASY	1278	98	B1-U3-G1	1333	103	B1-U3-G1	1389	107	B1-U3-G1	1444	111	B1-U3-G1	10.0	445	44	B0-U3-G1
			SYM	1347	104	B1-U3-G1	1406	108	B1-U3-G1	1464	113	B1-U3-G1	1523	117	B1-U3-G1		469	47	B0-U3-G1
			ASY-HS	965	74	B0-U3-G1	1006	77	B0-U3-G1	1048	81	B0-U3-G1	1090	84	B0-U3-G1		336	34	B0-U3-G1
12	525	20.0	ASY	1836	92	B1-U3-G2	1916	96	B1-U3-G2	1996	100	B1-U3-G2	2076	104	B1-U3-G2	15.0	519	35	B0-U3-G1
			SYM	1935	97	B1-U3-G2	2019	101	B1-U3-G2	2104	105	B1-U3-G2	2188	109	B1-U3-G2		547	36	B0-U3-G1
			ASY-HS	1386	69	B0-U3-G1	1446	72	B0-U3-G2	1507	75	B0-U3-G2	1567	78	B1-U3-G2		391	26	B0-U3-G1
12	700	26.0	ASY	2325	89	B1-U4-G2	2425	93	B1-U4-G2	2527	97	B1-U4-G2	2628	101	B1-U4-G2	N/A	N/A		
			SYM	2450	94	B1-U4-G2	2555	98	B1-U4-G2	2663	102	B1-U4-G2	2770	107	B1-U4-G2		N/A		
			ASY-HS	1754	67	B1-U3-G2	1831	70	B1-U3-G2	1907	73	B1-U3-G2	1983	76	B1-U3-G2		N/A		
12	875	33.0	ASY	2785	84	B1-U4-G2	2906	88	B1-U4-G2	3028	92	B1-U4-G2	3149	95	B1-U4-G2	N/A	N/A		
			SYM	2936	89	B1-U4-G2	3064	93	B1-U4-G2	3192	97	B1-U4-G2	3320	101	B1-U4-G2		N/A		
			ASY-HS	2102	64	B1-U3-G2	2194	66	B1-U3-G2	2285	69	B1-U4-G2	2377	72	B1-U4-G2		N/A		
12	1050	40.0	ASY	3169	79	B1-U4-G2	3307	83	B1-U4-G2	3444	86	B1-U4-G2	3582	90	B1-U4-G2	N/A	N/A		
			SYM	3340	84	B1-U4-G2	3486	87	B2-U4-G2	3631	91	B2-U4-G2	3776	94	B2-U4-G2		N/A		
			ASY-HS	2392	60	B1-U4-G2	2496	62	B1-U4-G2	2600	65	B1-U4-G2	2704	68	B1-U4-G2		N/A		

IES File downloads for this product can be found at [www.usaltg.com/downloads/columns.html](http://www.usaltg.com/downloads/columns.html)

**PHOTOMETRIC GUIDE - ISOFOOTCANDLE PLOTS (AXMR9)**

**AXMR9-PLD-NL-20LED-1050mA-40K - 16' Height (No Lens Open Frame)**

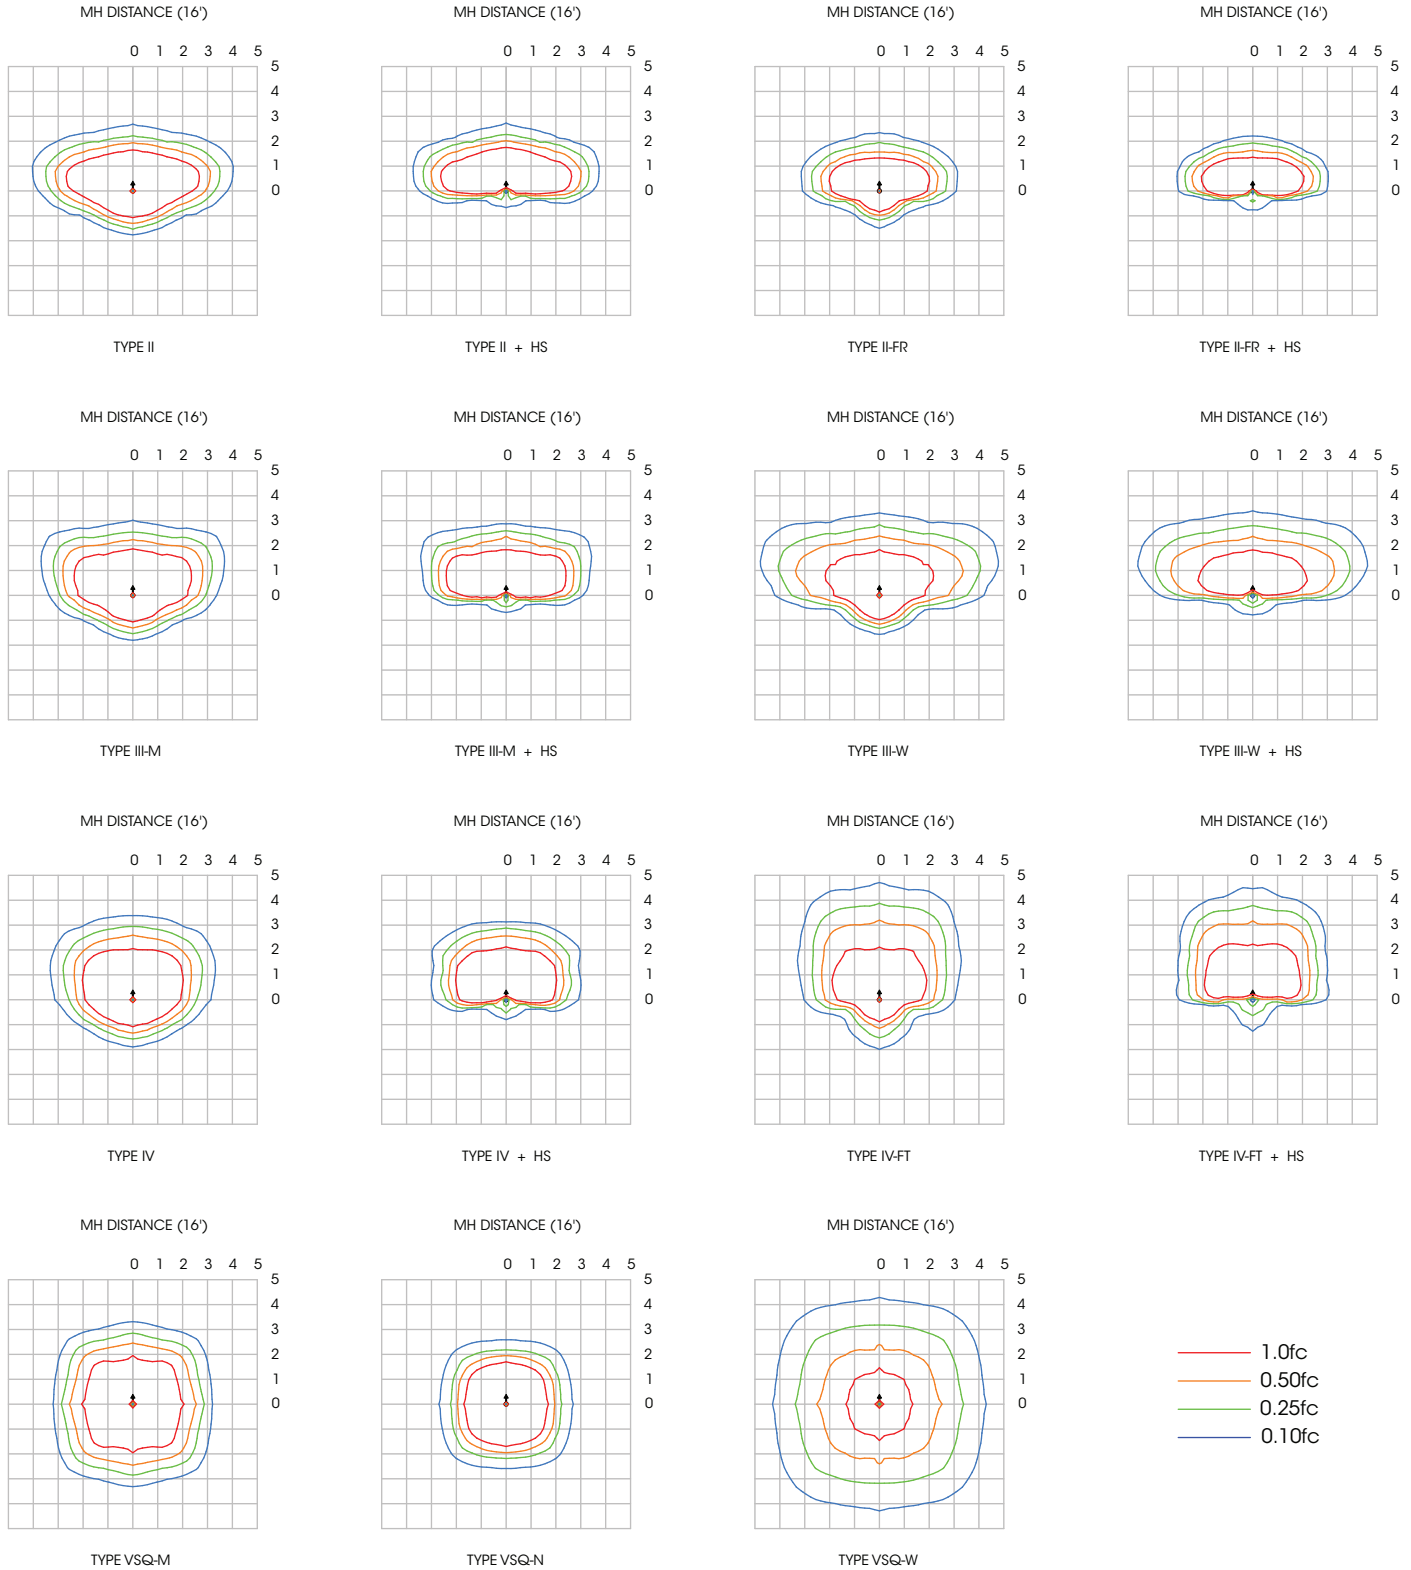

IES File downloads for this product can be found at [www.usaltg.com/downloads/columns.html](http://www.usaltg.com/downloads/columns.html)

## PHOTOMETRIC GUIDE - LUMEN TABLES (AXMR9)

AXMR9-PLED-NL (No Lens Open Frame)																			
LED Count	Drive Current (mA)	System Watts	Dist'n Type	27K (2700K - 70CRI)			30K (3000K - 70CRI)			40K (4000K - 70CRI)			50K (5000K - 70CRI)			System Watts	TRA (590nm)		
				LUMENS	LPW	BUG RATING	LUMENS	LPW	BUG RATING	LUMENS	LPW	BUG RATING	LUMENS	LPW	BUG RATING		LUMENS	LPW	BUG RATING
20	175	11.0	II	1541	140	B1-U0-G1	1608	146	B1-U0-G1	1675	152	B1-U0-G1	1741	158	B1-U0-G1	8.5	603	71	B0-U0-G0
			II-FR	1528	139	B1-U0-G0	1595	145	B1-U0-G0	1661	151	B1-U0-G0	1727	157	B1-U0-G0		598	70	B0-U0-G0
			III-M	1541	140	B1-U0-G1	1609	146	B1-U0-G1	1676	152	B1-U0-G1	1742	158	B1-U0-G1		603	71	B0-U0-G0
			III-W	1403	128	B0-U0-G1	1464	133	B0-U0-G1	1525	139	B0-U0-G1	1585	144	B0-U0-G1		549	65	B0-U0-G1
			IV	1561	142	B1-U0-G1	1629	148	B1-U0-G1	1697	154	B1-U0-G1	1764	160	B1-U0-G1		611	72	B0-U0-G0
			IV-FT	1400	127	B0-U0-G1	1462	133	B0-U0-G1	1522	138	B0-U0-G1	1583	144	B0-U0-G1		548	65	B0-U0-G1
			VSQ-N	1602	146	B1-U0-G0	1672	152	B1-U0-G0	1741	158	B1-U0-G0	1811	165	B1-U0-G0		627	74	B0-U0-G0
			VSQ-M	1601	146	B1-U0-G0	1671	152	B1-U0-G0	1740	158	B1-U0-G0	1809	164	B1-U0-G0		627	74	B1-U0-G0
			VSQ-W	1566	142	B1-U0-G1	1635	149	B1-U0-G1	1703	155	B2-U0-G1	1770	161	B2-U0-G1		613	72	B1-U0-G1
			IHS	1118	102	B0-U0-G0	1167	106	B0-U0-G0	1214	110	B0-U0-G0	1262	115	B0-U0-G0		437	51	B0-U0-G0
			II-FR-HS	1151	105	B0-U0-G0	1202	109	B0-U0-G0	1251	114	B0-U0-G0	1301	118	B0-U0-G0		450	53	B0-U0-G0
			III-M-HS	1119	102	B0-U0-G0	1168	106	B0-U0-G0	1217	111	B0-U0-G0	1265	115	B0-U0-G0		438	52	B0-U0-G0
			III-W-HS	1115	101	B0-U0-G1	1165	106	B0-U0-G1	1213	110	B0-U0-G1	1260	115	B0-U0-G1		437	51	B0-U0-G0
			IV-HS	1160	105	B0-U0-G0	1211	110	B0-U0-G0	1261	115	B0-U0-G0	1311	119	B0-U0-G0		454	53	B0-U0-G0
			IV-FT-HS	1107	101	B0-U0-G1	1156	105	B0-U0-G1	1204	109	B0-U0-G1	1251	114	B0-U0-G1		434	51	B0-U0-G1
20	350	22.0	II	2800	127	B1-U0-G1	2923	133	B1-U0-G1	3044	138	B1-U0-G1	3166	144	B1-U0-G1	17.1	974	57	B0-U0-G0
			II-FR	2778	126	B1-U0-G1	2899	132	B1-U0-G1	3019	137	B1-U0-G1	3140	143	B1-U0-G1		967	57	B0-U0-G0
			III-M	2801	127	B1-U0-G1	2922	133	B1-U0-G1	3044	138	B1-U0-G1	3165	144	B1-U0-G1		974	57	B0-U0-G0
			III-W	2550	116	B1-U0-G1	2661	121	B1-U0-G1	2772	126	B1-U0-G1	2882	131	B1-U0-G1		887	52	B0-U0-G1
			IV	2837	129	B1-U0-G1	2961	135	B1-U0-G1	3084	140	B1-U0-G1	3207	146	B1-U0-G1		987	58	B0-U0-G0
			IV-FT	2545	116	B1-U0-G1	2666	121	B1-U0-G1	2767	126	B1-U0-G1	2877	131	B1-U0-G1		885	52	B0-U0-G1
			VSQ-N	2913	132	B1-U0-G0	3039	138	B1-U0-G0	3166	144	B2-U0-G0	3292	150	B2-U0-G0		1013	59	B1-U0-G0
			VSQ-M	2910	132	B2-U0-G1	3037	138	B2-U0-G1	3163	144	B2-U0-G1	3290	150	B2-U0-G1		1012	59	B1-U0-G0
			VSQ-W	2847	129	B2-U0-G1	2971	135	B2-U0-G1	3094	141	B2-U0-G1	3218	146	B2-U0-G1		990	58	B1-U0-G1
			IHS	2031	92	B0-U0-G1	2119	96	B0-U0-G1	2207	100	B0-U0-G1	2295	104	B0-U0-G1		706	41	B0-U0-G0
			II-FR-HS	2091	95	B0-U0-G0	2182	99	B0-U0-G0	2273	103	B0-U0-G0	2363	107	B0-U0-G0		728	43	B0-U0-G0
			III-M-HS	2035	92	B0-U0-G1	2123	97	B0-U0-G1	2211	101	B0-U0-G1	2299	105	B0-U0-G1		707	41	B0-U0-G0
			III-W-HS	2027	92	B0-U0-G1	2116	96	B0-U0-G1	2203	100	B0-U0-G1	2291	104	B0-U0-G1		706	41	B0-U0-G1
			IV-HS	2107	96	B0-U0-G1	2199	100	B0-U0-G1	2290	104	B0-U0-G1	2381	108	B0-U0-G1		733	43	B0-U0-G0
			IV-FT-HS	2013	91	B0-U0-G1	2100	95	B0-U0-G1	2187	99	B0-U0-G1	2275	103	B0-U0-G1		700	41	B0-U0-G1
20	525	33.0	II	4024	122	B1-U0-G1	4199	127	B1-U0-G1	4374	133	B1-U0-G1	4549	138	B1-U0-G1	25.8	1137	44	B0-U0-G0
			II-FR	3991	121	B1-U0-G1	4165	126	B1-U0-G1	4338	131	B1-U0-G1	4511	137	B1-U0-G1		1128	44	B0-U0-G0
			III-M	4024	122	B1-U0-G1	4199	127	B1-U0-G1	4374	133	B1-U0-G1	4549	138	B1-U0-G1		1137	44	B0-U0-G0
			III-W	3663	111	B1-U0-G1	3823	116	B1-U0-G1	3982	121	B1-U0-G1	4141	125	B1-U0-G1		1035	40	B0-U0-G1
			IV	4077	124	B1-U0-G1	4255	129	B1-U0-G1	4432	134	B1-U0-G1	4609	140	B1-U0-G1		1152	45	B0-U0-G0
			IV-FT	3657	111	B1-U0-G2	3817	116	B1-U0-G2	3976	120	B1-U0-G2	4134	125	B1-U0-G2		1034	40	B0-U0-G1
			VSQ-N	4185	127	B2-U0-G1	4368	132	B2-U0-G1	4549	138	B2-U0-G1	4731	143	B2-U0-G1		1183	46	B1-U0-G0
			VSQ-M	4182	127	B3-U0-G1	4364	132	B3-U0-G1	4546	138	B3-U0-G1	4727	143	B3-U0-G1		1181	46	B1-U0-G0
			VSQ-W	4091	124	B3-U0-G1	4269	129	B3-U0-G1	4447	135	B3-U0-G1	4625	140	B3-U0-G1		1156	45	B1-U0-G1
			IHS	2918	88	B0-U0-G1	3046	92	B0-U0-G1	3172	96	B0-U0-G1	3298	100	B0-U0-G1		825	32	B0-U0-G0
			II-FR-HS	3005	91	B0-U0-G0	3136	95	B0-U0-G0	3267	99	B0-U0-G0	3397	103	B0-U0-G0		849	33	B0-U0-G0
			III-M-HS	2923	89	B0-U0-G1	3051	92	B0-U0-G1	3178	96	B0-U0-G1	3305	100	B0-U0-G1		826	32	B0-U0-G0
			III-W-HS	2914	88	B0-U0-G1	3041	92	B0-U0-G1	3167	96	B0-U0-G1	3293	100	B0-U0-G1		824	32	B0-U0-G1
			IV-HS	3028	92	B0-U0-G1	3160	96	B0-U0-G1	3291	100	B0-U0-G1	3422	104	B0-U0-G1		856	33	B0-U0-G0
			IV-FT-HS	2892	88	B0-U0-G1	3018	91	B0-U0-G1	3143	95	B0-U0-G1	3269	99	B0-U0-G1		818	32	B0-U0-G1
20	700	44.0	II	5094	116	B1-U0-G1	5315	121	B1-U0-G1	5537	126	B1-U0-G1	5758	131	B2-U0-G1	N/A	N/A	N/A	N/A
			II-FR	5053	115	B1-U0-G1	5272	120	B1-U0-G1	5492	125	B1-U0-G1	5712	130	B1-U0-G1				
			III-M	5094	116	B1-U0-G1	5316	121	B1-U0-G1	5537	126	B1-U0-G1	5758	131	B1-U0-G2				
			III-W	4638	105	B1-U0-G2	4839	110	B1-U0-G2	5040	115	B1-U0-G2	5242	119	B1-U0-G2				
			IV	5161	117	B1-U0-G1	5385	122	B1-U0-G1	5609	127	B1-U0-G1	5834	133	B1-U0-G2				
			IV-FT	4630	105	B1-U0-G2	4831	110	B1-U0-G2	5033	114	B1-U0-G2	5234	119	B1-U0-G2				
			VSQ-N	5299	120	B2-U0-G1	5529	126	B2-U0-G1	5759	131	B2-U0-G1	5989	136	B2-U0-G1				
			VSQ-M	5294	120	B3-U0-G1	5525	126	B3-U0-G1	5754	131	B3-U0-G1	5984	136	B3-U0-G1				
			VSQ-W	5179	118	B3-U0-G2	5404	123	B3-U0-G2	5629	128	B3-U0-G2	5854	133	B3-U0-G2				
			IHS	3694	84	B0-U0-G1	3854	88	B0-U0-G1	4014	91	B0-U0-G1	4174	95	B1-U0-G1				
			II-FR-HS	3805	86	B0-U0-G1	3970	90	B0-U0-G1	4135	94	B0-U0-G1	4300	98	B0-U0-G1				
			III-M-HS	3701	84	B0-U0-G1	3862	88	B0-U0-G1	4022	91	B0-U0-G1	4182	95	B0-U0-G2				
			III-W-HS	3689	84	B0-U0-G2	3849	87	B0-U0-G2	4009	91	B0-U0-G2	4169	95	B0-U0-G2				
			IV-HS	3833	87	B0-U0-G1	4000	91	B0-U0-G1	4165	95	B0-U0-G1	4332	98	B0-U0-G1				
			IV-FT-HS	3661	83	B0-U0-G2	3821	87	B0-U0-G2	3979	90	B0-U0-G2	4138	94	B0-U0-G2				
20	875	55.0	II	6105	111	B2-U0-G1	6371	116	B2-U0-G2	6636	121	B2-U0-G2	6901	125	B2-U0-G2	N/A	N/A	N/A	N/A
			II-FR	6056	110	B1-U0-G1	6319	115	B1-U0-G1	6582	120	B1-U0-G1	6845	124	B1-U0-G1				
			III-M	6105	111	B2-U0-G2	6371	116	B2-U0-G2	6637	121	B2-U0-G2	6902	125	B2-U0-G2				
			III-W	5558	101	B1-U0-G2	5800	105	B1-U0-G2	6042	110	B1-U0-G2	6283	114	B1-U0-G2				
			IV	6185	112	B2-U0-G2	6454	117	B2-U0-G2	6723	122	B2-U0-G2	6992	127	B2-U0-G2				
			IV-FT	5549	101	B1-U0-G2	5791	105	B1-U0-G2	6032	110	B1-U0-G2	6273	114	B1-U0-G2				
			VSQ-N	6349	115	B2-U0-G1	6626	120	B2-U0-G1	6901	125	B2-U0-G1	7177	130	B2-U0-G1				
			VSQ-M	6345	115	B3-U0-G1	6621	120	B3-U0-G1	6897	125	B3-U0-G1	7172	130	B3-U0-G1				
			VSQ-W	6206	113	B3-U0-G2	6476	118	B3-U0-G2	6746	123	B3-U0-G2	7016	128	B3-U0-G2				
			IHS	4426	80	B1-U0-G1	4619	84	B1-U0-G1	4811	87	B1-U0-G2	5003	91	B1-U0-G2				
			II-FR-HS	4559	83	B0-U0-G1	4758	87	B0-U0-G1	4956	90	B0-U0-G1	5153	94	B0-U0-G1				
			III-M-HS	4435	81	B0-U0-G2	4628	84	B0-U0-G2	4820	88	B0-U0-G2	5012	91	B0-U0-G2				
			III-W-HS	4420	80	B0-U0-G2	4613	84	B0-U0-G2	4805	87	B0-U0-G2	4996	91	B0-U0-G2				
			IV-HS	4594	84	B0-U0-G2	4793	87	B0-U0-G2	4993	91	B0-U0-G2	5192	94	B0-U0-G2				
			IV-FT-HS	4387	80	B0-U0-G2	4578	83	B0-U0-G2	4769	87	B0-U0-G2	4959	90	B0-U0-G2				
20	1050	66.0	II	6945	105	B2-U0-G2	7248	110	B2-U0-G2	7549	114	B2-U0-G2	7851	119					


## PHOTOMETRIC GUIDE - LUMEN TABLES (AXMR9)

AXMR9-PLD-CA (Clear Acrylic Lens)																																							
LED Count	Drive Current (mA)	System Watts	Dist'n Type	27K (2700K - 70CRI)			30K (3000K - 70CRI)			40K (4000K - 70CRI)			50K (5000K - 70CRI)			System Watts	TRA (590nm)																						
				LUMENS	LPW	BUG RATING	LUMENS	LPW	BUG RATING	LUMENS	LPW	BUG RATING	LUMENS	LPW	BUG RATING		LUMENS	LPW	BUG RATING																				
20	175	11.0	II	1494	136	B1-U1-G1	1559	142	B1-U1-G1	1623	148	B1-U1-G1	1687	153	B1-U1-G1	8.5	580	68	B0-U0-G0																				
			IV-FTHS	1104	100	B0-U1-G1	1152	103	B0-U1-G1	1199	109	B0-U1-G1	1246	113	B0-U1-G1		428	50	B0-U0-G0																				
			20	350	22.0	II	2705	123	B1-U1-G1	2823	128	B1-U1-G1	2940	134	B1-U1-G1		3056	139	B1-U1-G1	17.1	937	55	B0-U0-G0																
						IV-FTHS	1957	89	B0-U1-G1	2042	93	B0-U1-G1	2127	97	B0-U1-G1		2212	101	B0-U1-G1		679	40	B0-U0-G0																
						20	525	33.0	II	3882	118	B1-U1-G1	4051	123	B1-U1-G1		4219	128	B1-U1-G1		4387	133	B1-U1-G1	25.8	1094	42	B0-U0-G0												
									IV-FTHS	2810	85	B1-U1-G1	2932	89	B1-U1-G1		3054	93	B1-U1-G1		3176	96	B1-U1-G1		793	31	B0-U0-G0												
									20	700	44.0	II	4917	112	B1-U2-G1		5130	117	B1-U2-G1		5343	121	B2-U2-G1		5556	126	B2-U2-G1	N/A	N/A	N/A	N/A								
												IV-FTHS	3559	81	B1-U1-G2		3713	84	B1-U1-G2		3867	88	B1-U1-G2		4022	91	B1-U1-G2		793	31	B0-U0-G0								
												20	875	55.0	II		5890	107	B2-U2-G1		6146	112	B2-U2-G1		6401	116	B2-U2-G2		6656	121	B2-U2-G2	N/A	N/A	N/A	N/A				
															IV-FTHS		4263	78	B1-U1-G2		4449	81	B1-U1-G2		4633	84	B1-U1-G2		4818	88	B1-U1-G2		793	31	B0-U0-G0				
															20		1050	66.0	II		6698	101	B2-U2-G2		6989	106	B2-U2-G2		7279	110	B2-U2-G2		7569	115	B2-U2-G2	N/A	N/A	N/A	N/A
																			IV-FTHS		4850	73	B1-U1-G2		5060	77	B1-U1-G2		5270	80	B1-U1-G2		5481	83	B1-U1-G2		793	31	B0-U0-G0

IES File downloads for this product can be found at [www.usaltg.com/downloads/columns.html](http://www.usaltg.com/downloads/columns.html)

**PHOTOMETRIC GUIDE - ISOFOOTCANDLE PLOTS (AXMR9)**

**AXMR9-PLED-WA-20LED-1050mA-40K - 16' Height (White Acrylic Lens)**

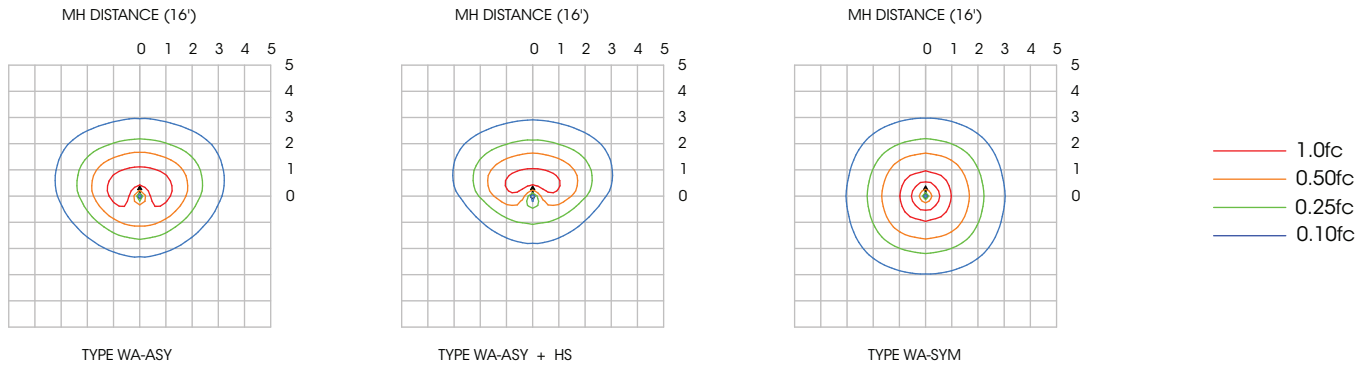

**PHOTOMETRIC GUIDE - LUMEN TABLES (AXMR9)**

AXMR9-PLED-WA (White Acrylic Lens)																			
LED Count	Drive Current (mA)	System Watts	Dist'n Type	27K (2700K - 70CRI)			30K (3000K - 70CRI)			40K (4000K - 70CRI)			50K (5000K - 70CRI)			System Watts	TRA (590nm)		
				LUMENS	LPW	BUG RATING	LUMENS	LPW	BUG RATING	LUMENS	LPW	BUG RATING	LUMENS	LPW	BUG RATING		LUMENS	LPW	BUG RATING
20	175	11.0	ASY	1223	107	B1-U3-G1	1223	111	B1-U3-G1	1273	116	B1-U3-G1	1324	120	B1-U3-G1	8.5	458	54	B0-U3-G1
			SYM	1236	112	B1-U3-G1	1288	117	B1-U3-G1	1343	122	B1-U3-G1	1396	127	B1-U3-G1		484	57	B0-U3-G1
			ASY-HS	884	80	B0-U3-G1	923	84	B0-U3-G1	961	87	B0-U3-G1	999	91	B0-U3-G1		346	41	B0-U3-G1
20	350	22.0	ASY	2130	97	B1-U3-G2	2222	101	B1-U3-G2	2315	105	B1-U4-G2	2407	109	B1-U4-G2	17.1	741	43	B0-U3-G1
			SYM	2244	102	B1-U3-G2	2342	106	B1-U4-G2	2440	111	B1-U4-G2	2538	115	B1-U4-G2		782	46	B1-U3-G1
			ASY-HS	1608	73	B1-U3-G2	1677	76	B1-U3-G2	1747	79	B1-U3-G2	1817	83	B1-U3-G2		559	33	B0-U3-G1
20	525	33.0	ASY	3061	93	B1-U4-G2	3193	97	B1-U4-G2	3326	101	B1-U4-G2	3460	105	B1-U4-G2	25.8	865	34	B0-U3-G1
			SYM	3225	98	B1-U4-G2	3366	102	B1-U4-G2	3506	106	B2-U4-G2	3646	110	B2-U4-G2		912	35	B1-U3-G1
			ASY-HS	2310	70	B1-U4-G2	2411	73	B1-U4-G2	2511	76	B1-U4-G2	2611	79	B1-U4-G2		653	25	B0-U3-G1
20	700	44.0	ASY	3874	88	B1-U4-G3	4043	92	B1-U4-G3	4211	96	B1-U4-G3	4380	100	B1-U4-G3	N/A	N/A		
			SYM	4084	93	B2-U4-G2	4259	97	B2-U4-G2	4438	101	B2-U4-G3	4617	105	B2-U5-G3		N/A		
			ASY-HS	2923	66	B1-U4-G2	3051	69	B1-U4-G2	3178	72	B1-U4-G3	3305	75	B1-U4-G3		N/A		
20	875	55.0	ASY	4642	84	B1-U5-G3	4844	88	B1-U5-G3	5046	92	B1-U5-G3	5248	95	B2-U5-G3	N/A	N/A		
			SYM	4893	89	B2-U5-G3	5106	93	B2-U5-G3	5320	97	B2-U5-G3	5534	101	B2-U5-G3		N/A		
			ASY-HS	3504	64	B1-U4-G3	3656	66	B1-U4-G3	3809	69	B1-U4-G3	3961	72	B1-U4-G3		N/A		
20	1050	66.0	ASY	5282	80	B2-U5-G3	5511	84	B2-U5-G3	5741	87	B2-U5-G3	5970	90	B2-U5-G3	N/A	N/A		
			SYM	5567	84	B2-U5-G3	5810	88	B2-U5-G3	6051	92	B2-U5-G3	6294	95	B2-U5-G3		N/A		
			ASY-HS	3986	60	B1-U4-G3	4159	63	B1-U4-G3	4333	66	B1-U4-G3	4506	68	B1-U4-G3		N/A		

IES File downloads for this product can be found at [www.usaltg.com/downloads/columns.html](http://www.usaltg.com/downloads/columns.html)