PENDANT MOUNTED ARM

XCNA MINI

PROJECT NAME:

PROJECT TYPE:

FEATURES


Arm

Durable corrosion resistant, cast aluminum construction.


Finish

Super TGIC polyester powder coating is applied onto a metal substrate this has been pretreated with a four-stage process for maximum adhesion and color retention. The top coat is baked at 400° F for maximum hardness and exterior durability.










XCNAM-1 EPA = 0.68



XCNAM-WM

SCALE: 1/2"=1'

U.S. Pole Co Inc. 660 West Avenue O, Palmdale, CA 93551 Phone (661) 233-2000 Fax (661) 233-2001 www.usatig.com




SUN VALLEY

LIGHTING

SPECIFICATIONS

Trulevel System® Assembly



 Loosen (4) Captive Screws and remove Access Door from Trulevel Coupler, pull out Quick Connect from Trulevel Coupler and Trulevel Ball.

Trulevel

Coupler

Luminaire


ORDERING INFORMATION

Quick Connect


(Th)

ത

Access Door



- 2. Place Trulevel Ball inside of Trulevel Coupler as illustrated.
 - A Notched Section of Trulevel Ball must face outward as illustrated.
 - B Flat Section of Trulevel Ball must face inward.




4. Rotate (left to right \pm 22.5°) and level Luminaire to desired position. Tighten Access Door.

(Tighten each bolt to recommended torque: 10 ft-lb, foot-pound)

Trulevel Pendant Mount is intended to allow for fixture leveling, but is not intended to be "free-swinging" upon proper installation.

Spec/Order Example: XCNAM-5-90/RAL-7004-T

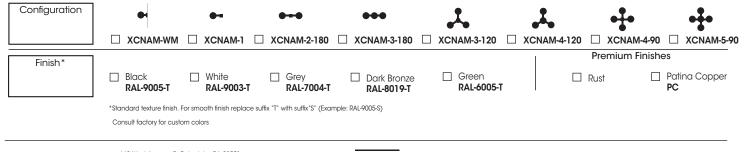

660 West Avenue O, Palmdale, CA 93551 Phone (661) 233-2000 Fax (661) 233-2001 www.usaltg.com

3. Connect Quick Connect components, push components inside of Trulevel

Fixture will suspend without Access Door during installation.

Coupler cavity, replace Access Door and loosely secure, do not tighten.



