

BASE


ONE PIECE CORROSION RESISTANT, DURABLE CAST ALUMINUM CONSTRUCTION, MINIMUM .220 WALL THICKNESS. BASE CONSISTS OF A SMOOTH, STEPPED BOTTOM SECTION WITH HAND HOLE AND A HIGHLY DECORATIVE TOP SECTION. HAND HOLE COVER SUPPLIED WITH TAMPER RESISTANT HARDWARE. GROUNDING LUG PROVIDED INSIDE BASE OPPOSITE HAND HOLE.

ANCHORAGE

A 3/4" CAST ALUMINUM ANCHOR RING IS WELDED 1" ABOVE BOTTOM OF BASE TO ACCEPT (4) FULLY GALVANIZED ANCHOR BOLTS. EACH BOLT SUPPLIED WITH TWO NUTS AND TWO WASHERS. ANCHORAGE IS FASTENED THROUGH HAND HOLE.


FINISH

ELECTROSTATICALLY APPLIED BAKED ON TEXTURED ACRYLIC ENAMEL. (SEE PAGE 5 FOR OPTIONAL FINISH AND COLOR SELECTION)

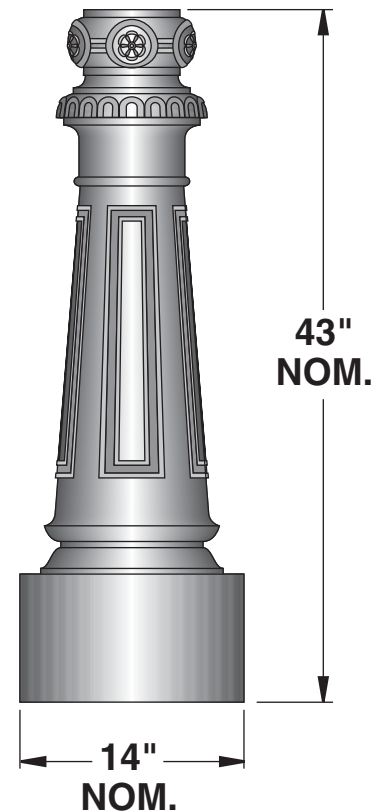

1800M BASE

POLE ACCESSORIES (SPECIFY AS SUFFIX TO CAT. NO.)

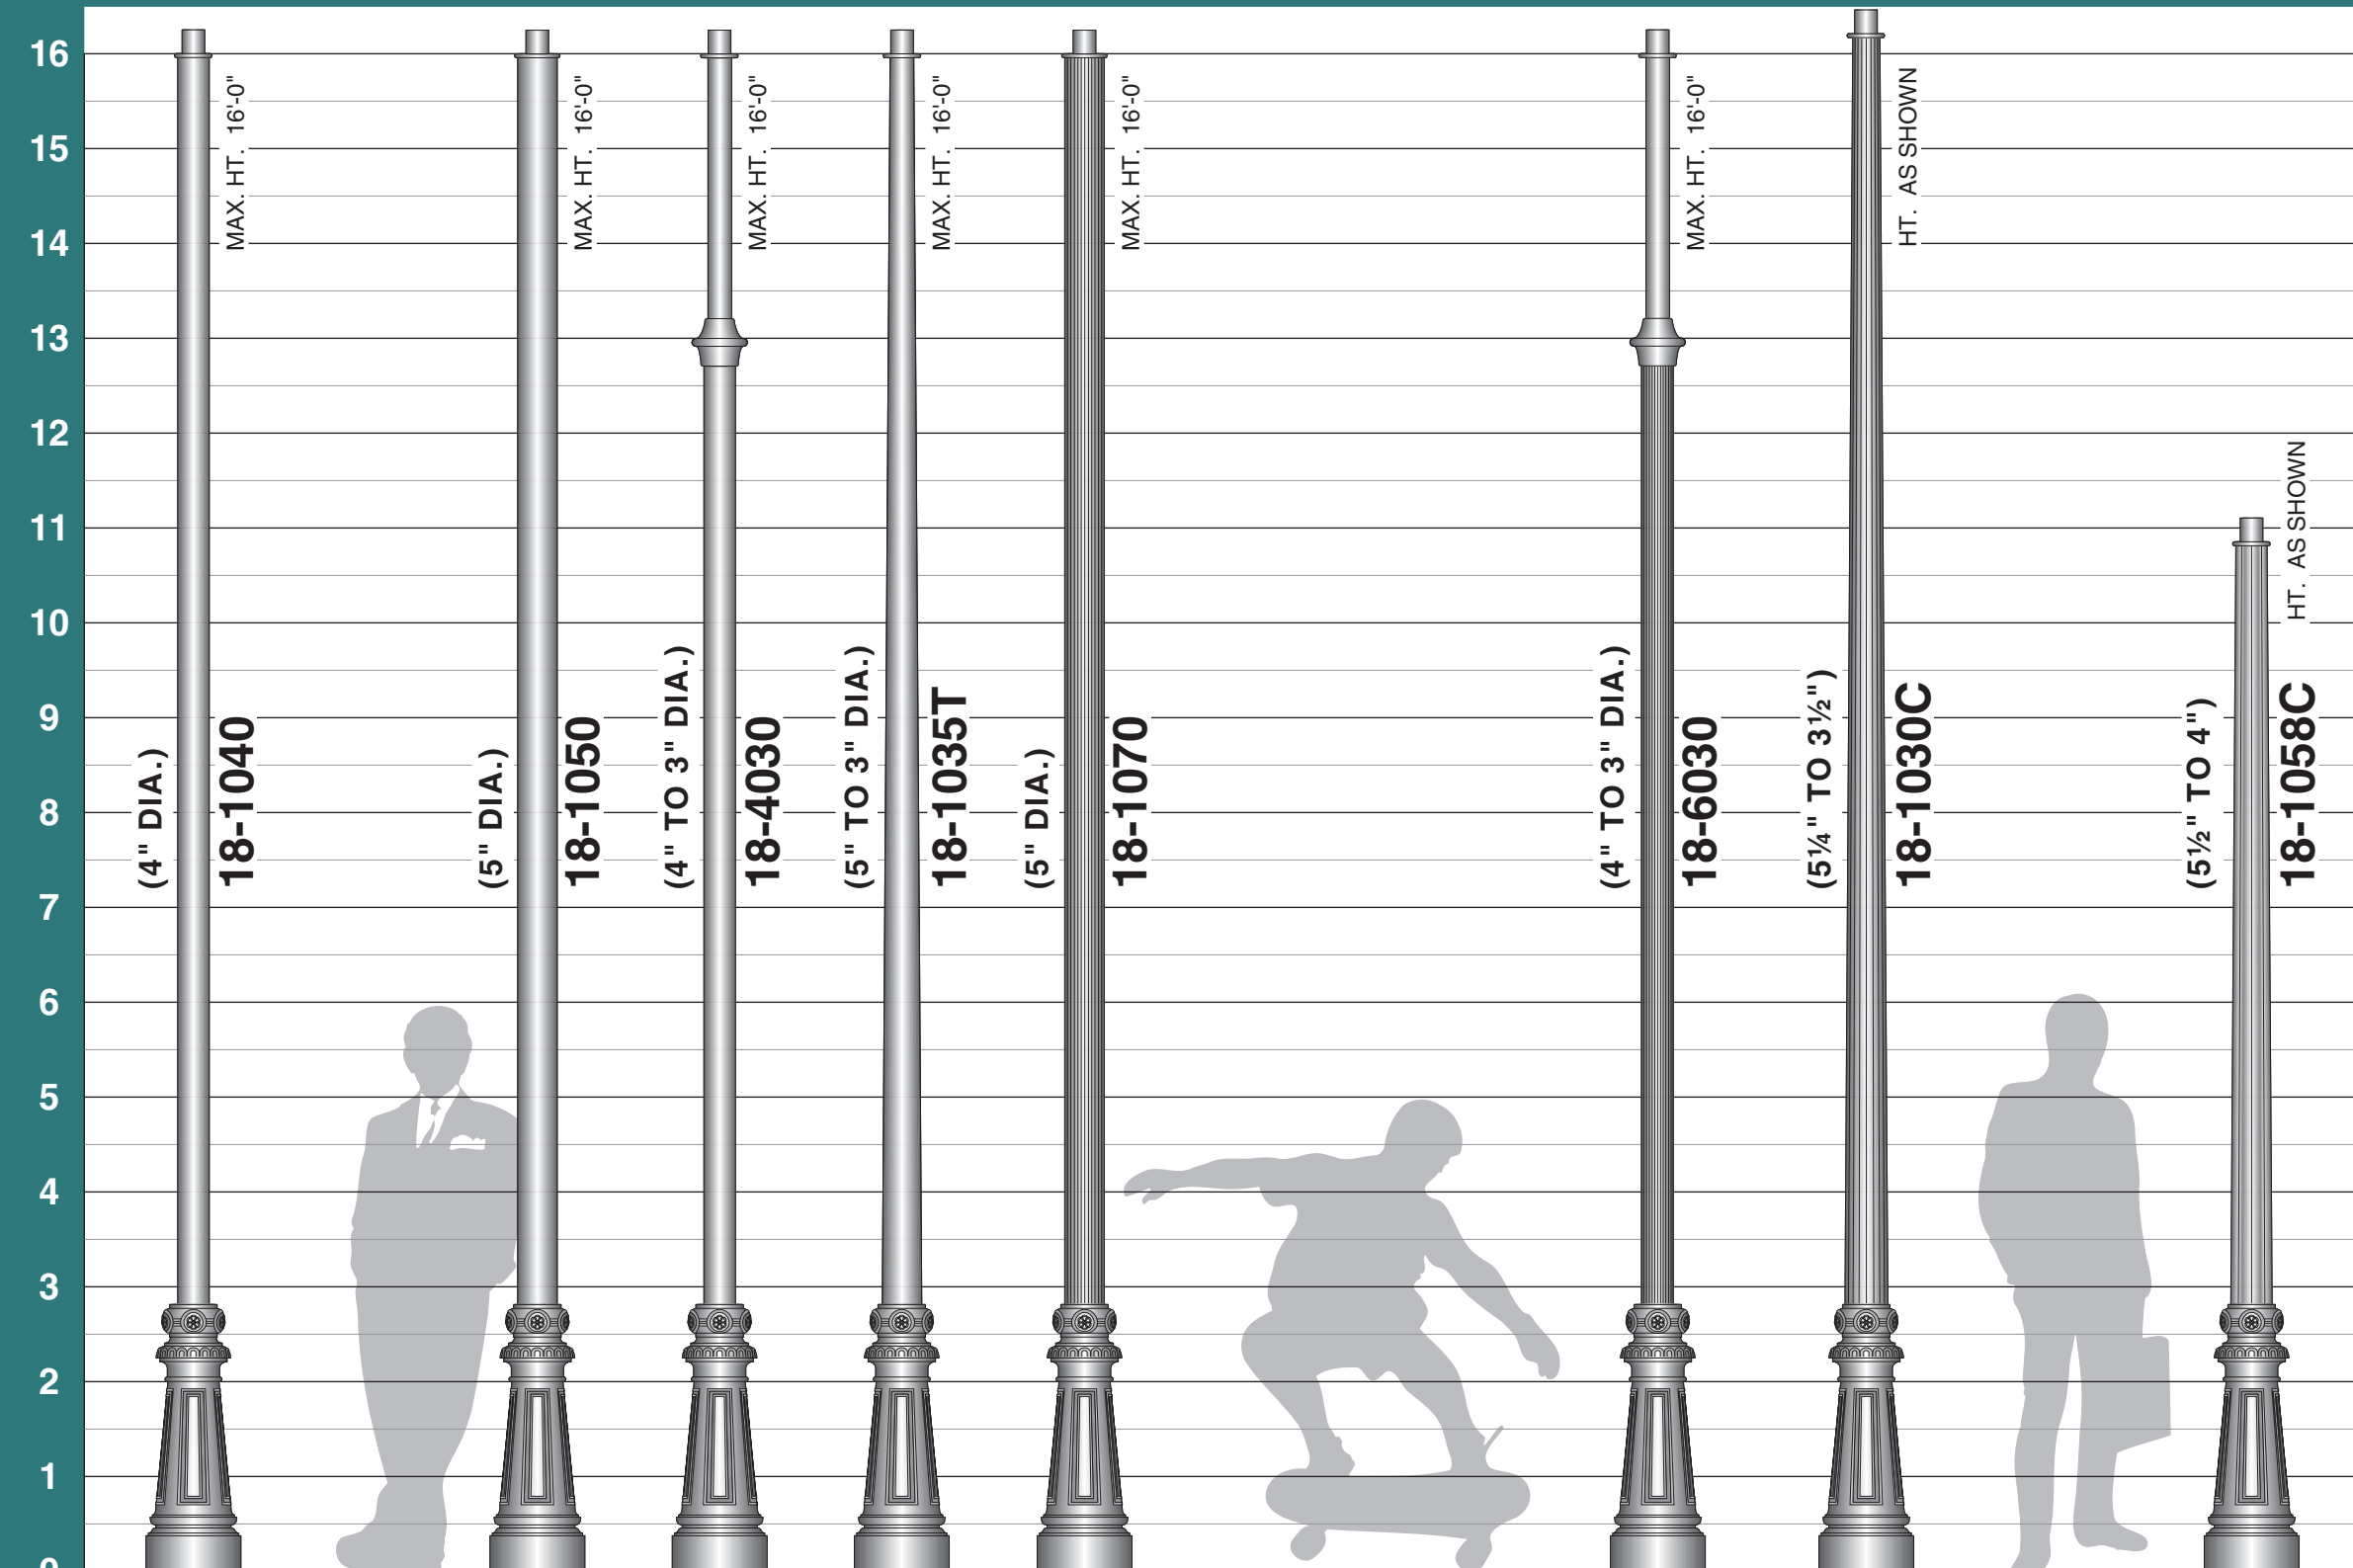

SHAFT IS CIRCUMFERENTIALLY WELDED TO BASE FOR ONE PIECE CONSTRUCTION
SEE SHAFT SECTION FOR SPECIFICATIONS AND ADDITIONAL STYLES

TENONS

STANDARD: 2 7/8" O.D.
OPTIONS: 2 3/8" O.D.
3 1/2" O.D.

PT23
PT31

DUPLEX OR G.F.I.
RECEPTACLE
WITH COVER

DUP
GFI

FIELD ROTATABLE
OR FIXED BANNER
ARM

RBA
FBA

BANNER
EYE BOLT

BEB

BREAK AWAY
BANNER ARM

BBA

FIELD ROTATABLE
OR FIXED BASKET
HOLDER

RBH
FBH

FIELD ROTATABLE
STREET SIGN

RSS

FIELD ROTATABLE
LADDER REST

RLR
20"

FIELD ROTATABLE
OR FIXED FLAG
HOLDER


RFH
FFH
1 3/8" I.D.



sun valley
LIGHTING


660 WEST AVENUE O, PALMDALE, CA 93551
(661) 233-2000
FAX (661) 233-2001
www.sunvalleylighting.com

1800M BASE

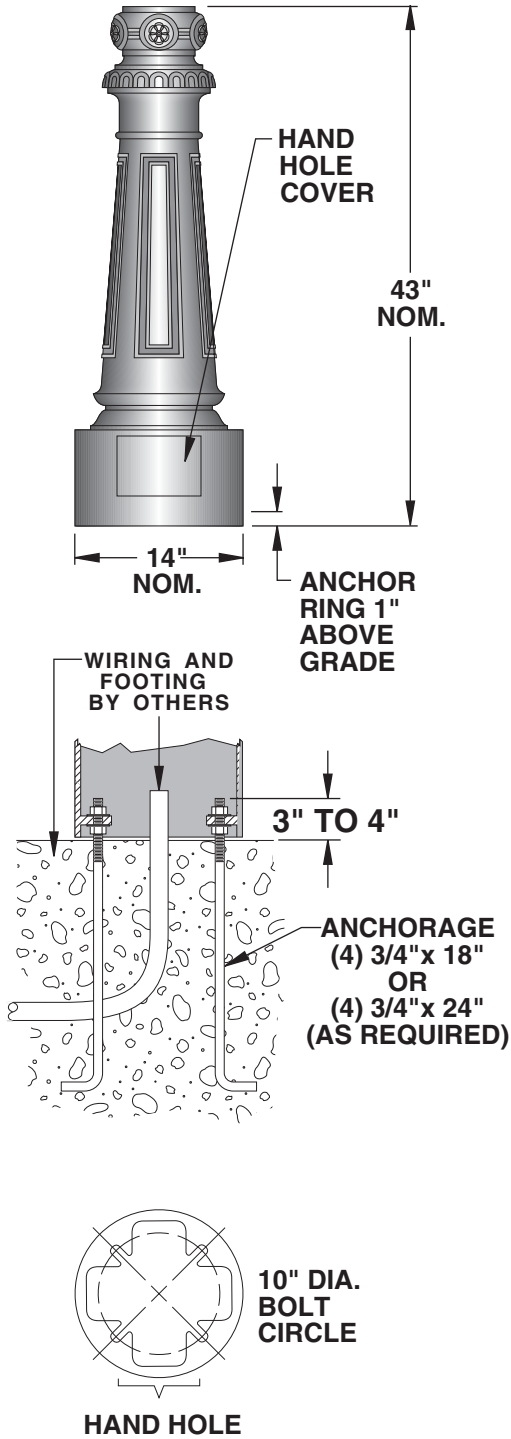


SUGGESTED LUMINAIRES


		4
		3
		2
		1
		0
		4
		3
		2
		1
		0
		4
		3
		2
		1
		0
		FT.




LAER2-YA




LCKM2




LCF

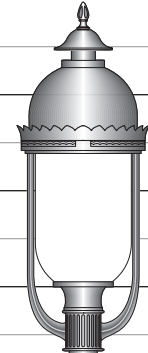

LCZ



DSTR1



RCGN18

SEE LUMINAIRE SECTION
FOR ADDITIONAL STYLES