

SOLID AREA LIGHTING

BRA8 SERIES - LED

Bollard

Durable corrosion resistant extruded and cast aluminum construction. 1/4" wall thickness.

LED Power Array™

Three-dimensional array consisting of 6 individual LED tubes fastened to a retaining plate equally spaced to provide 360° of even illumination output. Each LED tube consists of a circuit board populated with a multiple of LED's which is fastened to a radial aluminum heat sink. A white Acrylic Lens and end caps protect each LED tube's internal components and provides diffusion to prevent shadowing and striations.

Internal Louver (IL) - A specular louver stack conceals the inner LED Power Array Module and provides uplight and glare control through the external clear Acrylic Lens.

Cast Louver (CL) - External cast aluminum louver stack protects the internal LED Power Array Module and provides uplight and glare control. An internal clear Acrylic Lens is integrated with the LED Power Array Module.

Opal Lens (WA) - Exterior white Acrylic Lens protects the internal LED Power Array Module and provides a uniform white glow.

Radial LED Module

LED'S are mounted to a circular heatsink in a radial array. The radial LED module is concealed in the cap of the bollard. LED's are not directly visible from angles above 90°.

Parabolic Reflector (TR) - A specular Parabolic Reflector reflects a portion of the distribution from the radial LED module and provides a uniform wide angle throw through the outer clear Acrylic Lens.

LED Emitters

High Output LED's are driven at 350mA for nominal 1 Watt output each. 70CRI Minimum. LED's are available in standard Neutral White (4000K), or optional Cool White (5000K) or Warm White (3000K). Consult Factory for other LED options.

LED Driver

UL and CUL recognized Constant Current LED drivers operate on input voltages from 120-277VAC, 50/60hz. Consult Factory for (347-480VAC). Driver is mechanically fastened to a retaining bracket. Driver has a minimum 4KV of internal surge protection, 10KV & 20KV Surge Protector optional. Dimmable and High-Low Driver options available.

Finish

Electrostatically applied TGIC Polyester Powder Coat on substrate prepared with 20 PSI power wash at 140°F. Four step media blast and iron phosphate pretreatment for protection and paint adhesion. 400°F bake for maximum hardness and durability.



BRA

(BRA8 shown with -TR Optics)



BOLLARD	A	B	C	D
BRA8	42" 1067mm	8" 203mm	6" 152mm	8" 203mm
BRA6	42" 1067mm	6" 152mm	4" 102mm	6" 152mm

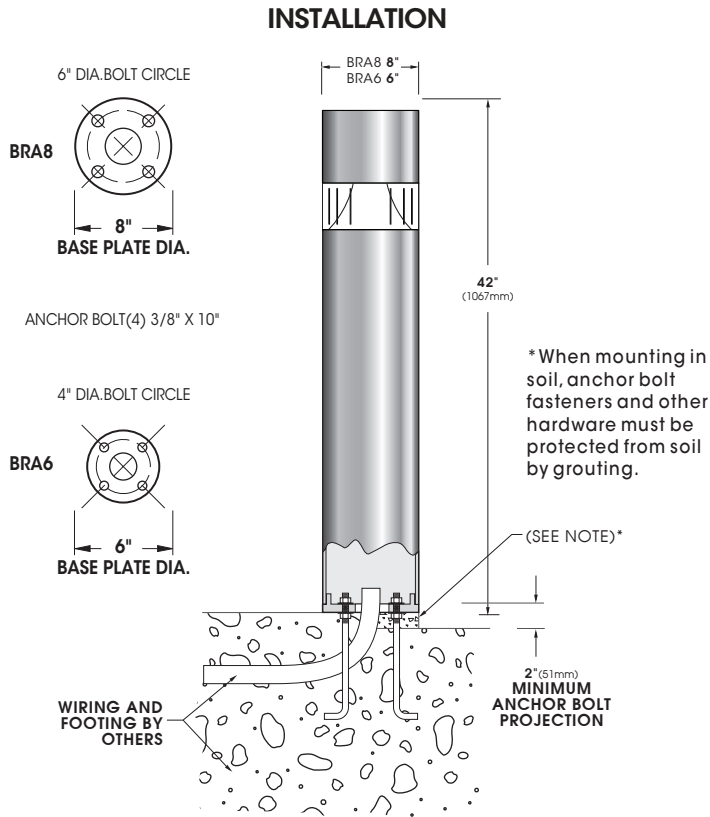
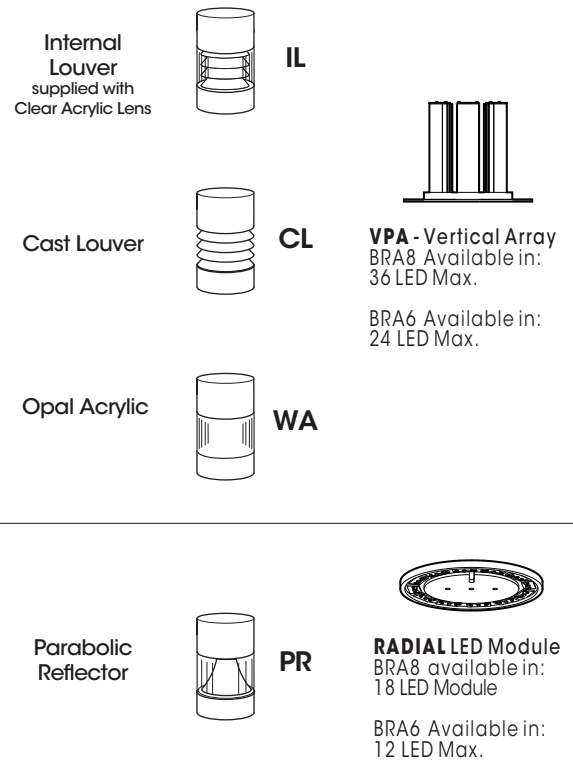


BABA compliant



U.L. Listed for
Wet Location

2025279

SPECIFICATIONS

OPTICS

ORDERING INFORMATION

Spec/Order Example: BRA8-CL/18LEDWWUNV/RAL-8019-S/20SP

Model	Optics	# of LEDs	Color Temp - CCT	Voltage	Mounting	Finish	Options
Model	Optics	LED			Mounting	Finish	Options
<input type="checkbox"/> BRA8-LED <input type="checkbox"/> BRA6-LED	Vertical Power Array	# of LEDs	Color		<input type="checkbox"/> Ground Installation (Standard) <input type="checkbox"/> Wall Mount WM	Standard Textured Finish	<input type="checkbox"/> Dimmable driver(s) (0-10V) DIM <input type="checkbox"/> High-low Dimming for Hardwired Switching or Non-Integrated Motion Sensor HLSW <input type="checkbox"/> Internal House Side Shield HS <input type="checkbox"/> Duplex Receptacle (Consult factory) DUP <input type="checkbox"/> Ground Fault Receptacle (Consult factory) GFI <input type="checkbox"/> 10KV Surge Protector 10SP <input type="checkbox"/> 20KV Surge Protector (277V & 480V only) 20SP Optional Heights: <input type="checkbox"/> 30" <input type="checkbox"/> 36"
	<input type="checkbox"/> Internal Louver IL <input type="checkbox"/> Cast Louver CL <input type="checkbox"/> Opal Acrylic WA	<input type="checkbox"/> 36LED ¹ <input type="checkbox"/> 24LED	<input type="checkbox"/> NW (4000K) Standard <input type="checkbox"/> CW (5000K) <input type="checkbox"/> WW (3000K) Consult Factory for Other LED Color, CCT, & CRI Options			<input type="checkbox"/> Black RAL-9005-T <input type="checkbox"/> White RAL-9003-T <input type="checkbox"/> Grey RAL-7004-T <input type="checkbox"/> Dark Bronze RAL-8019-T <input type="checkbox"/> Green RAL-6005-T	
	Radial LED Array		Voltage			Premium Finishes	
	<input type="checkbox"/> Parabolic Reflector PR	<input type="checkbox"/> 18LED	<input type="checkbox"/> UNV (120-277) <input type="checkbox"/> 347 <input type="checkbox"/> 480			<input type="checkbox"/> Rust <input type="checkbox"/> Patina Copper PC	
NOTES: 1 - AVAILABLE IN BRA8 ONLY							