

SOLID STATE AREA LIGHTING

DSBPT Series - PLED

Luminaire

Heavy walled one-piece aluminum spinning with single reveal for additional rigidity. Housing is supported at six points (3 per side) by 6 aluminum curved tubular arms (.84" O.D.) cradled in a cast aluminum hub which serves as a post top fitter. Arms are welded to the inside of the housing edge and welded to the hub longitudinally. Hub contains a field-splice compartment and a cast aluminum cover.

Arms

Three extruded aluminum (.84" O.D.; Alloy 6063-T1) arms are welded to each side of the cast aluminum pole top fitter. Arms are internally welded to the housing.

PLED™ Optics

Emitters (LED's) are arrayed on a metal core PCB panel with each emitter located on a copper thermal transfer pad and enclosed by an LED refractor. LED optics completely seal each individual emitter to meet an IP66 rating. In asymmetric distributions, a micro-reflector inside the refractor re-directs the house side emitter output towards the street side and functions as a house side shielding element. Refractors are injection molded H12 acrylic. Each LED refractor is sealed to the PCB over an emitter and all refractors are retained by an aluminum frame. Any one Panel, or group of Panels in a luminaire, have the same optical pattern. LED refractors produce standard site/area distributions. Panels are field replaceable and field rotatable in 90° increments.

LED Emitters

High output LED's are utilized with drive currents ranging from 350mA to 875mA. 70CRI Minimum. LED's are available in standard Neutral White (4000K), or optional Cool White (5000K) or Warm White (3000K). Consult Factory for other LED options.

LED Driver

Constant current electronic with a power factor of >.90 and a minimum operating temperature of -40°F/-40°C. Driver(s) is/are UL and cUL recognized. In-line terminal blocks facilitate wiring between the driver and optical arrays. Drivers accept an input of 120-277V, 50/60Hz or 347V-480V, 50,60Hz. (0 - 10V dimmable driver is standard. Driver has a minimum of 3KV internal surge protection. Luminaire supplied with 20KV surge protector for field installation.)

Amber LED's


PCA (Phosphor Converted Amber) LED's utilize phosphors to create color output similar to LPS lamps and have a slight output in the blue spectral bandwidth. TRA (True Amber) LED's utilize material that emits light in the amber spectral bandwidth only without the use of phosphors.

Finish

Super TGIC polyester powder coating is applied onto a metal substrate this has been pretreated with a four-stage process for maximum adhesion and color retention. The top coat is baked at 400° F for maximum hardness and exterior durability.


PROJECT NAME: _____

FIXTURE TYPE: _____

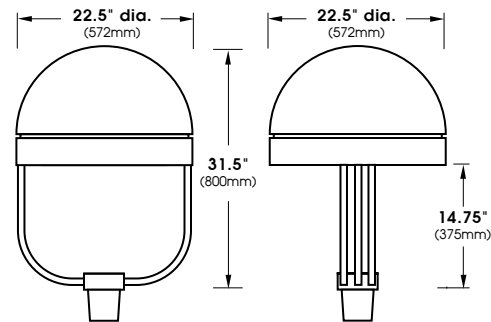

DSB22PT

(Formerly DSBPT3)

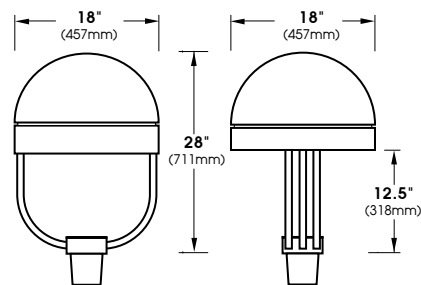

DSB18PT

(Formerly DSBMPT3)




BABA compliant

2025206

SPECIFICATIONS


Mounting Styles

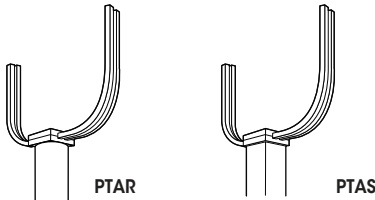

Internal tenon assembly, Decorative ring supplied for 6" dia. and all SQ. poles.

PTAR4 - To fit inside 4" Round pole.
PTAR5 - To fit inside 5" Round pole.
PTAR6 - To fit inside 6" Round pole.


PTAS4 - To fit inside 4" Square pole.
PTAS5 - To fit inside 5" Square pole.
PTAS6 - To fit inside 6" Square pole.
For any other size poles, please consult factory.

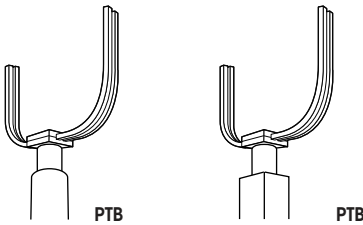

Luminaire's Tenon assemblies to fit over pole tenons ranging from 2 3/8" to 2 7/8" O.D. x 4" long
For any other pole tenon sizes, please consult factory.

PTB27 - To fit over 2 7/8" O.D. tenon. (standard)
PTB23 - To fit over 2 3/8" O.D. tenon.


Wall Mount




Fixture	A	B	C
DSB22PT	21" nom. (457mm)	22" (559mm)	15" (381mm)
DSB18PT	19" nom. (483mm)	18" (457mm)	13" (330mm) ^a

Extruded aluminum arm and cast aluminum wall bracket assembly provided with built in gasketed wire access for fixture/supply wire connection.


Wall Plate




PLED™ Modules




DSB22PT E.P.A. = 1.55
 Available in:
 80 LED Module Max



80 LED Module



DSB18PT E.P.A. = 1.30
 Available in:
 48 LED Module Max



48 LED Module

ORDERING INFORMATION

Spec/Order Example: DSB18PT/PLED-II/48LED-350mA/NW/347/1/7004-S

Luminaire	Optics	LED Mode			Voltage	Mounting	Finish	Options
Luminaire	Optics	LED			Voltage	Mounting	Finish	Options
☐ DSB22PT-PLED (Formerly DSBPT3) ☐ DSB18PT-PLED (Formerly DSBMPT3)	PLED™ Distribution Type ☐ Type II PLED-II ☐ Type II Front Row PLED-II-FR ☐ Type III Med. PLED-III-M ☐ Type III Wide PLED-III-W ☐ Type IV PLED-IV ☐ Type IV PLED-IV-FT ☐ Type V Narrow PLED-V-SQ-N ☐ Type V Med. PLED-V-SQ-M ☐ Type V Wide PLED-V-SQ-W	# of LEDs DSB22PT ☐ 80LED ¹ ☐ 48LED ☐ 36LED	Drive Current ☐ 1050mA ² ☐ 875mA ² ☐ 700mA ² ☐ 525mA ³ ☐ 350mA ⁴	Color Temp - CCT ☐ NW (4000K)* *Standard ☐ CW (5000K) ☐ WW (3000K) Other LED Colors Available Consult Factory ☐ Amber ³ ☐ Phosphor Converted Amber PCA ⁴ ☐ True Amber ⁵ TRA	☐ UNV (120-277) ☐ 347 ☐ 480	☐ PTAR4 ☐ PTAR5 ☐ PTAR6 ☐ PTAS4 ☐ PTAS5 ☐ PTAS6 ☐ PTB23 (To fit 2 3/8" O.D.) ☐ PTB27 (To fit 2 7/8" O.D.) PTB's will fit a max. 4" tall tenon, if taller, please consult factory. See USALTG.COM for additional arm styles	Standard Textured Finish ☐ Black 9005-T ☐ White 9003-T ☐ Grey 7004-T ☐ Dark Bronze 8019-T ☐ Green 6005-T Premium Finishes ☐ Rust ☐ Patina Copper PC For smooth finish replace suffix "T" with suffix "S" (Example: 9500-S) Consult factor for custom colors	☐ Internal House Side Shield inc. LED Count (Example: HS-PLED/48) HS-PLED ☐ Twist Lock Receptable Only TPR ☐ 7-Pin Twist Lock Receptable Only TPR7 ☐ High-Low Dimming for Switch by Others/Select Levels 50/100 or 25/100 (Example: HLSW/25) HLSW ☐ Photo Cell + Voltage (Example: PC120V) PC+V ☐ Single Fuse (120V, 277V) SF ☐ Double Fuse (208V, 240V) DF ☐ Blue-Tooth Programmable Photo/Motion Sensor (Factory - Motion 50/100; Photo 75/c) MS-F311
		DSB18PT ☐ 48LED ¹ ☐ 36LED ☐ 20LED						

NOTES:

- 1 - 875mA maximum
- 2 - 700mA and 875mA not for use with TRA LED's
- 3 - Narrow band Ambers have no Definable CCT equivalent
- 4 - 700mA maximum
- 5 - Available in 350mA & 525mA drive currents only

LED Count	Source Type	Source	Initial Lumens - 4000K CCT	Initial Lumens - 3000K CCT	Initial Lumens - 5000K CCT	L70 greater than (HR)	Starting Temp.	System Watts	Volts	Max Input Amps
DSB18PT										
20	LED	20 PLED® Optical Module – 350mA	2842 – 3262	2700 – 3098	2984 – 3424	90,000+	-40°F	22/28	120	.19/.24
									277	.08/.11
									347	.07/.08
20	LED	20 PLED® Optical Module – 525mA	4042 – 4637	3839 – 4405	4243 – 4868	90,000+	-40°F	33/39	120	.28/.33
									277	.12/.14
									347	.10/.12
20	LED	20 PLED® Optical Module – 700mA	5083 – 5832	4829 – 5540	5337 – 6123	90,000+	-40°F	44/50	120	.37/.42
									277	.16/.18
									347	.13/.15
20	LED	20 PLED® Optical Module – 875mA	6108 – 7008	5802 – 6657	6413 – 7358	90,000+	-40°F	56/62	120	.47/.52
									277	.21/.23
									347	.17/.18
20	LED	20 PLED® Optical Module – 1050mA	7086 – 8131	6732 – 7725	7441 – 8537	90,000+	-40°F	67/73	120	.56/.61
									277	.25/.27
									347	.20/.21
36	LED	36 PLED® Optical Module – 350mA	5116 – 5871	4860 – 5577	5371 – 6164	90,000+	-40°F	40/46	120	.34/.39
									277	.15/.17
									347	.12/.14
36	LED	36 PLED® Optical Module – 525mA	7274 – 8346	6910 – 7929	7638 – 8763	90,000+	-40°F	60/66	120	.50/.55
									277	.22/.24
									347	.18/.20
36	LED	36 PLED® Optical Module – 700mA	9149 – 10497	8691 – 9972	9606 – 11022	90,000+	-40°F	79/85	120	.66/.71
									277	.29/.31
									347	.23/.25
36	LED	36 PLED® Optical Module – 875mA	10994 – 12614	10444 – 11983	11544 – 13245	90,000+	-40°F	101/107	120	.85/.90
									277	.37/.39
									347	.30/.31
36	LED	36 PLED® Optical Module – 1050mA	12755 – 14635	12117 – 13903	13392 – 15367	90,000+	-40°F	120/126	120	1.00/1.05
									277	.44/.46
									347	.35/.37
48	LED	48 PLED® Optical Module – 350mA	6821 – 7827	6480 – 7435	7162 – 8218	90,000+	-40°F	53/59	120	.45/.50
									277	.20/.22
									347	.16/.17
48	LED	48 PLED® Optical Module – 525mA	9699 – 11128	9214 – 10572	10183 – 11684	90,000+	-40°F	79/85	120	.66/.71
									277	.29/.31
									347	.23/.25
48	LED	48 PLED® Optical Module – 700mA	12199 – 13398	11589 – 13296	12808 – 14696	90,000+	-40°F	106/112	120	.89/.94
									277	.39/.41
									347	.31/.33
48	LED	48 PLED® Optical Module – 875mA	14659 – 16819	13926 – 15978	15392 – 17660	90,000+	-40°F	134/140	120	1.12/1.17
									277	.49/.51
									347	.39/.41
DSB22PT										
36	LED	36 PLED® Optical Module – 350mA	5126 – 5882	4870 – 5588	5383 – 6176	90,000+	-40°F	40/46	120	.34/.39
									277	.15/.17
									347	.12/.14
36	LED	36 PLED® Optical Module – 525mA	7382 – 8470	7013 – 8047	7751 – 8894	90,000+	-40°F	59/65	120	.50/.55
									277	.23/.24
									347	.17/.19
36	LED	36 PLED® Optical Module – 700mA	9362 – 10742	8894 – 10205	9830 – 11279	90,000+	-40°F	79/85	120	.66/.71
									277	.29/.31
									347	.23/.25
36	LED	36 PLED® Optical Module – 875mA	10719 – 12298	10183 – 11682	11254 – 12913	90,000+	-40°F	103/109	120	.86/.91
									277	.38/.40
									347	.30/.32
36	LED	36 PLED® Optical Module – 1050mA	12435 – 14268	11813 – 13554	13057 – 14981	90,000+	-40°F	116/122	120	.97/1.02
									277	.42/.44
									347	.34/.36
48	LED	48 PLED® Optical Module – 350mA	6835 – 7843	6493 – 7450	7177 – 8235	90,000+	-40°F	53/59	120	.45/.50
									277	.20/.23
									347	.16/.17

LED Count	Source Type	Source	Initial Lumens - 4000K CCT	Initial Lumens - 3000K CCT	Initial Lumens - 5000K CCT	L70 greater than (HR)	Starting Temp.	System Watts	Volts	Max Input Amps
-----------	-------------	--------	----------------------------	----------------------------	----------------------------	-----------------------	----------------	--------------	-------	----------------

DSB22PT

48	LED	48 PLED® Optical Module - 525mA	9843 - 11294	9351 - 10729	10336 - 11859	90,000+	-40°F	78/84	120 277 347	.65/.70 .29/.31 .23/.25
48	LED	48 PLED® Optical Module - 700mA	12483 - 14323	11859 - 13607	13107 - 15038	90,000+	-40°F	105/111	120 277 347	.88/.93 .38/.40 .31/.32
48	LED	48 PLED® Optical Module - 875mA	14292 - 16397	13577 - 15577	15006 - 17217	90,000+	-40°F	137/143	120 277 347	1.15/1.20 .50/.52 .40/.42
48	LED	48 PLED® Optical Module - 1050mA	16581 - 19024	15752 - 18073	17409 - 19975	90,000+	-40°F	154/160	120 277 347	1.29/1.34 .56/.58 .45/.47
80	LED	80 PLED® Optical Module - 350mA	11392 - 13071	10823 - 12418	11962 - 13724	90,000+	-40°F	88/94	120 277 347	.74/.79 .32/.34 .26/.27
80	LED	80 PLED® Optical Module - 525mA	16406 - 18823	15585 - 17882	17226 - 19765	90,000+	-40°F	130/136	120 277 347	1.09/1.14 .47/.50 .38/.40
80	LED	80 PLED® Optical Module - 700mA	20805 - 23871	19765 - 22678	21845 - 25065	90,000+	-40°F	174/180	120 277 347	1.45/1.50 .63/.65 .50/.52
80	LED	80 PLED® Optical Module - 875mA	23819 - 27329	22628 - 25962	25010 - 28695	90,000+	-40°F	226/232	120 277 347	1.89/1.94 .82/.84 .66/.69

Phosphor Converted Amber LED

DSB18PT

20	PCA - LED	20 PLED® Optical Module - 350mA	1478 - 1696			51,000+	-40°F	25	120 277 347	.21 .10 .08
20	PCA - LED	20 PLED® Optical Module - 525mA	2102 - 2411			51,000+	-40°F	37	120 277 347	.31 .14 .11
20	PCA - LED	20 PLED® Optical Module - 700mA	2643 - 3033			51,000+	-40°F	50	120 277 347	.42 .18 .15
36	PCA - LED	36 PLED® Optical Module - 350mA	2660 - 3053			51,000+	-40°F	45	120 277 347	.38 .17 .13
36	PCA - LED	36 PLED® Optical Module - 525mA	3783 - 4340			51,000+	-40°F	67	120 277 347	.56 .25 .20
36	PCA - LED	36 PLED® Optical Module - 700mA	4757 - 5459			51,000+	-40°F	89	120 277 347	.75 .33 .26
48	PCA - LED	48 PLED® Optical Module - 350mA	3547 - 4070			51,000+	-40°F	59	120 277 347	.50 .22 .17
48	PCA - LED	48 PLED® Optical Module - 525mA	5043 - 5787			51,000+	-40°F	89	120 277 347	.75 .33 .26
48	PCA - LED	48 PLED® Optical Module - 700mA	6343 - 7278			51,000+	-40°F	118	120 277 347	.99 .43 .34

DSB22PT

36	PCA - LED	36 PLED® Optical Module - 350mA	2666 - 3059			51,000+	-40°F	45	120 277 347	.38 .17 .13
36	PCA - LED	36 PLED® Optical Module - 525mA	3839 - 4405			51,000+	-40°F	66	120 277 347	.56 .24 .19

LED Count	Source Type	Source	Initial Lumens - 4000K CCT	Initial Lumens - 3000K CCT	Initial Lumens - 5000K CCT	L70 greater than (HR)	Starting Temp.	System Watts	Volts	Max Input Amps
-----------	-------------	--------	----------------------------	----------------------------	----------------------------	-----------------------	----------------	--------------	-------	----------------

Phosphor Converted Amber LED

DSB22PT

36	PCA - LED	36 PLED® Optical Module - 700mA	4868 - 5586			51,000+	-40°F	88	120 277 347	.74 .32 .26
48	PCA - LED	48 PLED® Optical Module - 350mA	3554 - 4078			51,000+	-40°F	59	120 277 347	.50 .22 .17
48	PCA - LED	48 PLED® Optical Module - 525mA	5119 - 5873			51,000+	-40°F	87	120 277 347	.73 .32 .25
48	PCA - LED	48 PLED® Optical Module - 700mA	6491 - 7448			51,000+	-40°F	117	120 277 347	.98 .43 .34
80	PCA - LED	80 PLED® Optical Module - 350mA	11392 - 13071			51,000+	-40°F	98	120 277 347	.82 .36 .29
80	PCA - LED	80 PLED® Optical Module - 525mA	16406 - 18823			51,000+	-40°F	145	120 277 347	1.21 .52 .42
80	PCA - LED	80 PLED® Optical Module - 700mA	20805 - 23871			51,000+	-40°F	195	120 277 347	1.63 .71 .57

True Amber LED - 590nm

DSB18PT

20	TRA - LED	20 PLED® Optical Module - 350mA	854 - 979			66,500+	-40°F	18	120 277 347	.15 .07 .06
20	TRA - LED	20 PLED® Optical Module - 525mA	1022 - 1172			66,500+	-40°F	26	120 277 347	.22 .10 .08
36	TRA - LED	36 PLED® Optical Module - 350mA	1536 - 1762			66,500+	-40°F	31	120 277 347	.26 .12 .09
36	TRA - LED	36 PLED® Optical Module - 525mA	1838 - 2109			66,500+	-40°F	47	120 277 347	.40 .17 .14
48	TRA - LED	48 PLED® Optical Module - 350mA	2048 - 2350			66,500+	-40°F	41	120 277 347	.35 .15 .12
48	TRA - LED	48 PLED® Optical Module - 525mA	2451 - 2812			66,500+	-40°F	62	120 277 347	.52 .23 .18

DSB22PT

36	TRA - LED	36 PLED® Optical Module - 350mA	1539 - 1766			66,500+	-40°F	31	120 277 347	.26 .12 .09
36	TRA - LED	36 PLED® Optical Module - 525mA	1866 - 2140			66,500+	-40°F	46	120 277 347	.39 .18 .14
48	TRA - LED	48 PLED® Optical Module - 350mA	2053 - 2355			66,500+	-40°F	41	120 277 347	.35 .19 .12
48	TRA - LED	48 PLED® Optical Module - 525mA	2488 - 2854			66,500+	-40°F	61	120 277 347	.51 .22 .18
80	TRA - LED	80 PLED® Optical Module - 350mA	3421 - 3925			66,500+	-40°F	67	120 277 347	.56 .25 .20

LED Count	Source Type	Source	Initial Lumens - 4000K CCT	Initial Lumens - 3000K CCT	Initial Lumens - 5000K CCT	L70 greater than (HR)	Starting Temp.	System Watts	Volts	Max Input Amps
True Amber LED - 590nm										
DSB22PT										
80	TRA - LED	80 PLED® Optical Module - 525mA	4146 - 4757			66,500+	-40°F	101	120 277 347	.85 .37 .30

- 1) Max Input Amps is the highest of starting, operating, or open circuit currents
- 2) System Watts includes the source watts and all driver components.
- 3) Lumen values for LED Modules vary according to the distribution type
- 4) For Wattage and Max Input Amps showing two values, use the higher value for luminaires with lit uplight windows (-L & -M)
- 5) PCA and TRA LED optics not recommended for use with lit uplight window models (-L & -M)
- 6) Fuse value should be sufficient to protect all wiring components. For electronic driver and LED component protection, use 20KV surge suppressors.
- 7) L70(10K) – TM-21 6x rule applied

WARNING: All fixtures must be installed in accordance with local codes or the National Electrical Code. Failure to do so may result in serious personal injury.

SOLID STATE AREA LIGHTING

DSBPT Series - VLED

Luminaire

Heavy walled one-piece aluminum spinning with single reveal for additional rigidity. Housing is supported at six points (3 per side) by 6 aluminum curved tubular arms (.84" O.D.) cradled in a cast aluminum hub which serves as a post top fitter. Arms are welded to the inside of the housing edge and welded to the hub longitudinally. Hub contains a field-splice compartment and a cast aluminum cover.

Arms

Three extruded aluminum (.84" O.D.; Alloy 6063-T1) arms are welded to each side of the cast aluminum pole top fitter. Arms are internally welded to the housing.

VLED® Optics

Low copper (A356 Alloy; <0.2% Cu) cast aluminum housing. Integrated clear tempered glass lens sealed with a continuous silicone gasket protects emitters (LED's). Reflector-Prism optics, and seals the module from water intrusion and environmental contaminants. Module is sealed to meet an IP67 rating. Each emitter is optically controlled by a Reflector-Prism injection molded from H12 acrylic (3 types per module; one from 0° - 50°; one from 50° - 65°; one from 65° - 72°). Each Reflector-Prism is secured to an optical plate made of matte black anodized aluminum has indexing pins for precise aiming. The optical plate locates every Reflector-Prism over an emitter, are inserted to the optical plate from above and are secured with a UV curing adhesive. The Reflector-Prisms are arrayed to produce IES Type II, III, IV, and V-SQ distributions. The entire Optical Module is field rotatable in 90° increments. Both module and drivers are factory wired using water resistant, insulated cord.

LED Emitters

High output LED's are utilized with drive currents ranging from 350mA to 700mA. 70CRI Minimum. LED's are available in standard Neutral White (4000K), or optional Cool White (5000K) or Warm White (3000K). Consult Factory for other LED options.

LED Driver

Constant current programmable electronic with a power factor of >.90 and a minimum operating temperature of -40°F/-40°C. Driver(s) is/are UL and cUL recognized. In-line terminal blocks facilitate wiring between the driver and optical arrays. Drivers accept an input of 120-277V, 50/60Hz or 347V-480V, 50,60Hz. (0 - 10V dimmable driver is standard. Driver has a minimum of 3KV internal surge protection. Luminaire supplied with 20KV surge protector for field installation.)

Amber LED's


PCA (Phosphor Converted Amber) LED's utilize phosphors to create color output similar to LPS lamps and have a slight output in the blue spectral bandwidth. TRA (True Amber) LED's utilize material that emits light in the amber spectral bandwidth only without the use of phosphors.

Finish

Super TGIC polyester powder coating is applied onto a metal substrate this has been pretreated with a four-stage process for maximum adhesion and color retention. The top coat is baked at 400° F for maximum hardness and exterior durability.


PROJECT NAME: _____

FIXTURE TYPE: _____

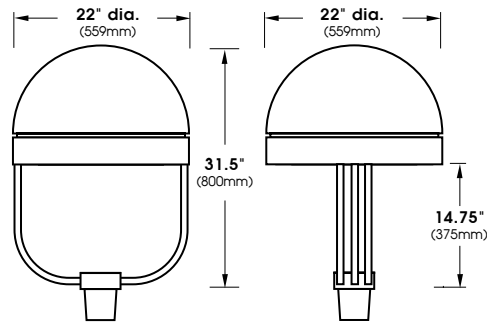

DSB22PT

(Formerly DSBPT3)

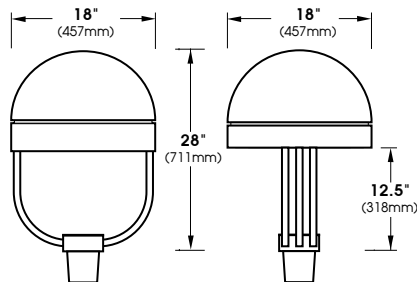

DSB18PT

(Formerly DSBMPT3)




BABA compliant

2025206

SPECIFICATIONS


Mounting Styles



Internal tenon assembly. Decorative ring supplied for 6" dia. and all SQ. poles.

PTAR4 - To fit inside 4" Round pole.
PTAR5 - To fit inside 5" Round pole.
PTAR6 - To fit inside 6" Round pole.


PTAS4 - To fit inside 4" Square pole.
PTAS5 - To fit inside 5" Square pole.
PTAS6 - To fit inside 6" Square pole.
For any other size poles, please consult factory.



Luminaire's Tenon assemblies to fit over pole tenons ranging from 2 3/8" to 2 7/8" O.D. x 4" long
For any other pole tenon sizes, please consult factory.

PTB27 - To fit over 2 7/8" O.D. tenon. (standard)
PTB23 - To fit over 2 3/8" O.D. tenon.


Wall Mount




Fixture	A	B	C
DSB22PT	21" nom. (457mm)	22" (559mm)	15" (381mm)
DSB18PT	19" nom. (483mm)	18" (457mm)	13" (330mm) ^a

Extruded aluminum arm and cast aluminum wall bracket assembly provided with built in gasketed wire access for fixture/supply wire connection.


Wall Plate




VLED® Modules




DSB22PT E.P.A. = 1.55
 Available in:
 48 LED Module Max



120 LED Module



DSB18PT E.P.A. = 1.30
 Available in:
 36 LED Module Max



80 LED Module

ORDERING INFORMATION

Spec/Order Example: DSB22PT/VLED-III-W/80LED-525mA/NW/277/1/7004-S

Luminaire	Optics	LED Mode		Voltage	Mounting	Finish	Options
Luminaire	Optics	LED		Voltage	Mounting	Finish	Options
☐ DSB22PT-VLED (Formerly DSBPT3) ☐ DSB18PT-VLED (Formerly DSBMPT3)	☐ Type II VLED-II ☐ Type III VLED-III ☐ Type IV VLED-IV ☐ Type V Med. VLED-V-SQ	# of LEDs DSB22PT ☐ 120LED¹ ☐ 100LED¹ ☐ 80LED ☐ 64LED DSB18PT ☐ 80LED¹ ☐ 64LED ☐ 48LED	Drive Current ☐ 700mA ☐ 525mA ☐ 350mA Color Temp - CCT ☐ NW (4000K)* *Standard ☐ CW (5000K) ☐ WW (3000K) Other LED Colors Available Consult Factory Amber² ☐ Phosphor Converted Amber PCA ☐ True Amber¹ TRA	☐ UNV (120-277) ☐ 347 ☐ 480	 ☐ PTAR4 ☐ PTAR5 ☐ PTAR6  ☐ PTAS4 ☐ PTAS5 ☐ PTAS6  ☐ PTB23 (To fit 2 3/8" O.D.) ☐ PTB27 (To fit 2 7/8" O.D.) PTB's will fit a max. 4" tall tenon, if taller, please consult factory. See USALTG.COM for additional arm styles	Standard Textured Finish ☐ Black 9005-T ☐ White 9003-T ☐ Grey 7004-T ☐ Dark Bronze 8019-T ☐ Green 6005-T Premium Finishes ☐ Rust ☐ Patina Copper PC For smooth finish replace suffix "T" with suffix "S" (Example: 9500-S) Consult factor for custom colors	☐ Internal House Side Shield inc. LED Count (Example: HS-VLED/48) HS-VLED ☐ Twist Lock Receptable Only TPR ☐ 7-Pin Twist Lock Receptable Only TPR7 ☐ High-Low Dimming for Switch by Others/Select Levels 50/100 or 25/100 (Example: HLSW/25) HLSW ☐ Photo Cell + Voltage (Example: PC120V) PC+V ☐ Single Fuse (120V, 277V) SF ☐ Double Fuse (208V, 240V) DF ☐ Blue-Tooth Programmable Photo/Motion Sensor (Factory - Motion 50/100; Photo 75/c) MS-F311

NOTES:

- 1 - Available in 350mA & 525mA Drive Currents only
- 2 - Narrow band Ambers have no definable CCT equivalent

LED Count	Source Type	Source	Initial Lumens - 4000K CCT	Initial Lumens - 3000K CCT	Initial Lumens - 5000K CCT	L70 greater than (HR)	Starting Temp.	System Watts	Volts	Max Input Amps
DSB18PT										
48	White LED	48 VLED® Optical Module – 350mA	6169 - 6558	5860 - 6230	6478 - 6886	90,000+	-40°C	53/59	120	0.44/0.49
									277	0.19/0.21
									347	0.15/0.17
48	White LED	48 VLED® Optical Module – 525mA	8494 - 9031	8069 - 8579	8919 - 9482	90,000+	-40°C	77/83	120	0.64/0.69
									277	0.28/0.3
									347	0.22/0.24
48	White LED	48 VLED® Optical Module – 700mA	10635 - 11307	10103 - 10742	11167 - 11872	90,000+	-40°C	103/109	120	0.86/0.91
									277	0.37/0.39
									347	0.3/0.31
64	White LED	64 VLED® Optical Module – 350mA	8225 - 8338	7813 - 7921	8636 - 8755	90,000+	-40°C	69/75	120	0.58/0.63
									277	0.25/0.27
									347	0.2/0.22
64	White LED	64 VLED® Optical Module – 525mA	11325 - 11481	10759 - 10907	11891 - 12055	90,000+	-40°C	102/108	120	0.85/0.9
									277	0.37/0.39
									347	0.29/0.31
80	White LED	80 VLED® Optical Module – 350mA	9675 - 9808	9191 - 9317	10159 - 10298	90,000+	-40°C	87/93	120	0.73/0.78
									277	0.31/0.34
									347	0.25/0.27
80	White LED	80 VLED® Optical Module – 525mA	13189 - 13370	12529 - 12701	13848 - 14038	90,000+	-40°C	127/133	120	1.06/1.11
									277	0.46/0.48
									347	0.37/0.38
DSB22PT										
48	White LED	48 VLED® Optical Module – 350mA	6169 - 6558	5860 - 6230	6478 - 6886	90,000+	-40°C	53/59	120	0.44/0.49
									277	0.19/0.21
									347	0.15/0.17
48	White LED	48 VLED® Optical Module – 525mA	8494 - 9031	8069 - 8579	8919 - 9482	90,000+	-40°C	75/81	120	0.63/0.68
									277	0.27/0.29
									347	0.22/0.23
48	White LED	48 VLED® Optical Module – 700mA	10635 - 11307	10103 - 10742	11167 - 11872	90,000+	-40°C	105/111	120	0.88/0.93
									277	0.38/0.4
									347	0.3/0.32
64	White LED	64 VLED® Optical Module – 350mA	8225 - 8745	7813 - 8308	8636 - 9183	90,000+	-40°C	71/77	120	0.59/0.64
									277	0.26/0.28
									347	0.2/0.22
64	White LED	64 VLED® Optical Module – 525mA	11325 - 12042	10759 - 11440	11891 - 12644	90,000+	-40°C	103/109	120	0.86/0.91
									277	0.37/0.39
									347	0.3/0.31
64	White LED	64 VLED® Optical Module – 700mA	13190 - 13824	12531 - 13133	13849 - 14516	90,000+	-40°C	140/146	120	1.17/1.22
									277	0.51/0.53
									347	0.4/0.42
80	White LED	80 VLED® Optical Module – 350mA	9675 - 10286	9191 - 9772	10159 - 10801	90,000+	-40°C	87/93	120	0.73/0.78
									277	0.31/0.34
									347	0.25/0.27
80	White LED	80 VLED® Optical Module – 525mA	13189 - 14023	12529 - 13322	13848 - 14724	90,000+	-40°C	127/133	120	1.06/1.11
									277	0.46/0.48
									347	0.37/0.38
80	White LED	80 VLED® Optical Module – 700mA	16487 - 17280	15662 - 16416	17311 - 18144	90,000+	-40°C	173/179	120	1.44/1.49
									277	0.62/0.65
									347	0.5/0.52
100	White LED	100 VLED® Optical Module – 350mA	11776 - 12304	11187 - 11689	12365 - 12919	90,000+	-40°C	108/114	120	0.9/0.95
									277	0.39/0.41
									347	0.31/0.33
100	White LED	100 VLED® Optical Module – 525mA	16291 - 17025	15476 - 16174	17106 - 17877	90,000+	-40°C	160/166	120	1.33/1.38
									277	0.58/0.6
									347	0.46/0.48
120	White LED	120 VLED® Optical Module – 350mA	14129 - 14765	13423 - 14027	14836 - 15503	90,000+	-40°C	129/135	120	1.08/1.13
									277	0.47/0.49
									347	0.37/0.39
120	White LED	120 VLED® Optical Module – 525mA	19549 - 20430	18572 - 19408	20527 - 21451	90,000+	-40°C	192/198	120	1.6/1.65
									277	0.69/0.71
									347	0.55/0.57

LED Count	Source Type	Source	Initial Lumens	L70 greater than (HR)	Starting Temp.	System Watts	Volts	Max Input Amps
Phosphor Converted Amber LED								
DSB18PT								
48	PC Amber	48 VLED® Optical Module – 350mA	3208 - 3410	51,000+	-40°C	59	120	0.49
							277	0.21
							347	0.17
48	PC Amber	48 VLED® Optical Module – 525mA	4417 - 4696	51,000+	-40°C	86	120	0.72
							277	0.31
							347	0.25
48	PC Amber	48 VLED® Optical Module – 700mA	5530 - 5880	51,000+	-40°C	115	120	0.96
							277	0.42
							347	0.33
64	PC Amber	64 VLED® Optical Module – 350mA	4277 - 4547	51,000+	-40°C	80	120	0.67
							277	0.29
							347	0.23
64	PC Amber	64 VLED® Optical Module – 525mA	5889 - 6262	51,000+	-40°C	114	120	0.95
							277	0.41
							347	0.33
80	PC Amber	80 VLED® Optical Module – 350mA	5031 - 5349	51,000+	-40°C	97	120	0.81
							277	0.35
							347	0.28
80	PC Amber	80 VLED® Optical Module – 525mA	6858 - 7292	51,000+	-40°C	142	120	1.18
							277	0.51
							347	0.41
DSB22PT								
48	PC Amber	48 VLED® Optical Module – 350mA	3208 - 3410	51,000+	-40°C	60	120	0.50
							277	0.22
							347	0.17
48	PC Amber	48 VLED® Optical Module – 525mA	4417 - 4696	51,000+	-40°C	84	120	0.70
							277	0.30
							347	0.24
48	PC Amber	48 VLED® Optical Module – 700mA	5530 - 5880	51,000+	-40°C	118	120	0.98
							277	0.43
							347	0.34
64	PC Amber	64 VLED® Optical Module – 350mA	4277 - 4547	51,000+	-40°C	80	120	0.67
							277	0.29
							347	0.23
64	PC Amber	64 VLED® Optical Module – 525mA	5889 - 6262	51,000+	-40°C	116	120	0.97
							277	0.42
							347	0.33
64	PC Amber	64 VLED® Optical Module – 700mA	6859 - 7189	51,000+	-40°C	157	120	1.31
							277	0.57
							347	0.45
80	PC Amber	80 VLED® Optical Module – 350mA	5031 - 5349	51,000+	-40°C	98	120	0.82
							277	0.35
							347	0.28
80	PC Amber	80 VLED® Optical Module – 525mA	6858 - 7292	51,000+	-40°C	142	120	1.18
							277	0.51
							347	0.41
80	PC Amber	80 VLED® Optical Module – 700mA	8573 - 8986	51,000+	-40°C	194	120	1.62
							277	0.70
							347	0.56
100	PC Amber	100 VLED® Optical Module – 350mA	6124 - 6398	51,000+	-40°C	121	120	1.01
							277	0.44
							347	0.35
100	PC Amber	100 VLED® Optical Module – 525mA	8471 - 8853	51,000+	-40°C	179	120	1.49
							277	0.65
							347	0.52
120	PC Amber	120 VLED® Optical Module – 350mA	7347 - 7678	51,000+	-40°C	145	120	1.21
							277	0.52
							347	0.42
120	PC Amber	120 VLED® Optical Module – 525mA	10166 - 10624	51,000+	-40°C	215	120	1.79
							277	0.78
							347	0.62

LED Count	Source Type	Source	Initial Lumens	L70 greater than (HR)	Starting Temp.	System Watts	Volts	Max Input Amps
-----------	-------------	--------	----------------	-----------------------	----------------	--------------	-------	----------------

True Amber LED - 590nm

DSB18PT

48	True Amber	48 VLED® Optical Module - 350mA	1841 - 1957	66,500+	-40°C	41	120	0.34
							277	0.15
							347	0.12
48	True Amber	48 VLED® Optical Module - 525mA	2535 - 2695	66,500+	-40°C	60	120	0.50
							277	0.22
							347	0.17
64	True Amber	64 VLED® Optical Module - 350mA	2454 - 2610	66,500+	-40°C	55	120	0.46
							277	0.20
							347	0.16
64	True Amber	64 VLED® Optical Module - 525mA	3379 - 3593	66,500+	-40°C	80	120	0.67
							277	0.29
							347	0.23
80	True Amber	80 VLED® Optical Module - 350mA	2887 - 3070	66,500+	-40°C	66	120	0.55
							277	0.24
							347	0.19
80	True Amber	80 VLED® Optical Module - 525mA	3936 - 4185	66,500+	-40°C	98	120	0.82
							277	0.35
							347	0.28

DSB22PT

48	True Amber	48 VLED® Optical Module - 350mA	1841 - 1957	66,500+	-40°C	41	120	0.34
							277	0.15
							347	0.12
48	True Amber	48 VLED® Optical Module - 525mA	2535 - 2695	66,500+	-40°C	58	120	0.48
							277	0.21
							347	0.17
64	True Amber	64 VLED® Optical Module - 350mA	2454 - 2610	66,500+	-40°C	55	120	0.46
							277	0.20
							347	0.16
64	True Amber	64 VLED® Optical Module - 525mA	3379 - 3593	66,500+	-40°C	80	120	0.67
							277	0.29
							347	0.23
80	True Amber	80 VLED® Optical Module - 350mA	2887 - 3070	66,500+	-40°C	67	120	0.56
							277	0.24
							347	0.19
80	True Amber	80 VLED® Optical Module - 525mA	3936 - 4185	66,500+	-40°C	98	120	0.82
							277	0.35
							347	0.28
100	True Amber	100 VLED® Optical Module - 350mA	3514 - 3672	66,500+	-40°C	83	120	0.69
							277	0.30
							347	0.24
100	True Amber	100 VLED® Optical Module - 525mA	4861 - 5080	66,500+	-40°C	123	120	1.03
							277	0.44
							347	0.35
120	True Amber	120 VLED® Optical Module - 350mA	4216 - 4406	66,500+	-40°C	99	120	0.83
							277	0.36
							347	0.29
120	True Amber	120 VLED® Optical Module - 525mA	5834 - 6097	66,500+	-40°C	148	120	1.23
							277	0.53
							347	0.43