

○ ROUND NON-TAPERED STEEL POLE

RNTS

Shaft

Round, fabricated from high grade structural steel tube. Shaft conforms to ASTM-A-501-68 specifications. Meets or exceeds minimum yield strength of 46,000 P.S.I. Wall thickness 11 GA. (.120 wall) or 7 GA. (.180 wall) as specified. Shaft is furnished with ground lug located inside pole on wall opposite hand hole.

Drilling Side Mount

A removable pole cap is included. Pole will be drilled to match U.S. Architectural fixtures. For other Drilling required, please specify DP after specified drill pattern. (example: 2-180DP)

Pole Top Mount

Standard pole top mount - PT27, fabricated from 2.5" (2.875" O.D.) steel pipe - tenon options available for pole tops please see Mounting column. For other pole top configurations please consult factory.

Hand Hole Cover

Steel Poles 15 feet and above - Supplied with reinforced steel 2 5/8" x 4 5/8" access opening. Hand Hole provided with rectangular 3"x5" stamped heavy gauge aluminum material. Sealed door is secured by a formed aluminum bar and a stainless steel, tamper proof screw.

Poles under 15 feet - Rectangular 3"x5" stamped heavy gauge aluminum material, 2 1/4" x 4 1/4" access opening. Sealed door is secured by a formed aluminum bar and a stainless steel, tamper proof screw.

Base Plate

Fabricated from structural quality hot rolled steel. Meets or exceeds minimum yield strength of 36,000 P.S.I. Base telescopes and is circumferentially welded to pole shaft. Slotted bolt holes provide 1" flexibility on either side of bolt circle centerline.

Anchorage


(4) anchor bolts fabricated from hot rolled steel bar. Minimum yield strength of 50,000 P.S.I. Bolts have "L" bend on one end and are threaded on the other. Bolts are fully galvanized and are furnished with two nuts and two washers.

Base Cover


Fabricated from heavy gauge quality carbon steel. Two-piece cover conceals base.

Finish

Electrostatically applied TGIC Polyester Powder Coat on substrate prepared with 20 PSI power wash at 140°F. Four step media blast and iron phosphate pretreatment for protection and paint adhesion. 400°F bake for maximum hardness and durability.

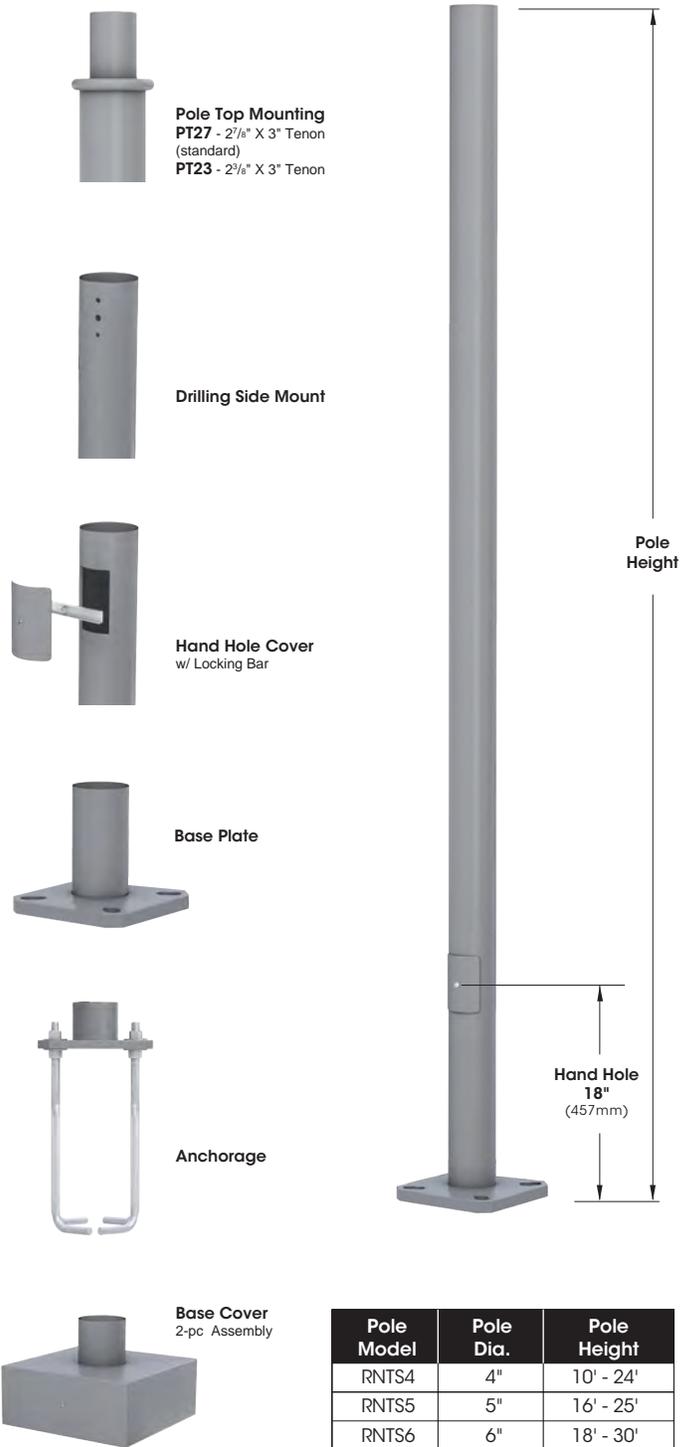

DRILLING SIDE MOUNT

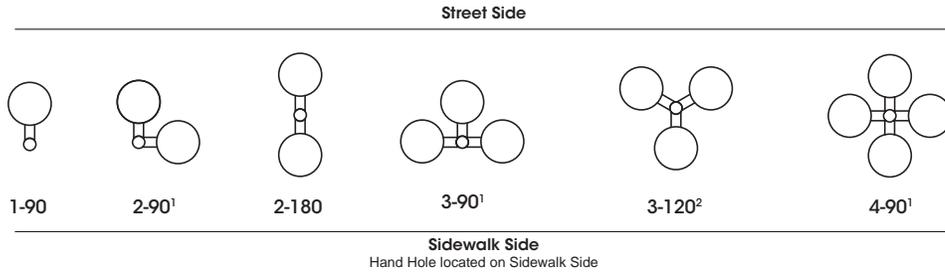


Notes

- 1- Poles smaller than 5" Dia. at top, or Non Linear Drilling requires PT27 and T490 Adaptor. (Adaptor is rotatable)
- 2- Poles smaller than 5" Dia. at top, or Non Linear Drilling requires PT27 and T3120 Adaptor. (Adaptor is rotatable)

When drilling pattern from other manufacturer's fixture is required, add "DP" to drill specifications. (Example: 2-180DP) **Drilling template must be provided.**

In the case of other manufacturer's drilling pattern, customer must provide drilling pattern.

BOLT CIRCLE

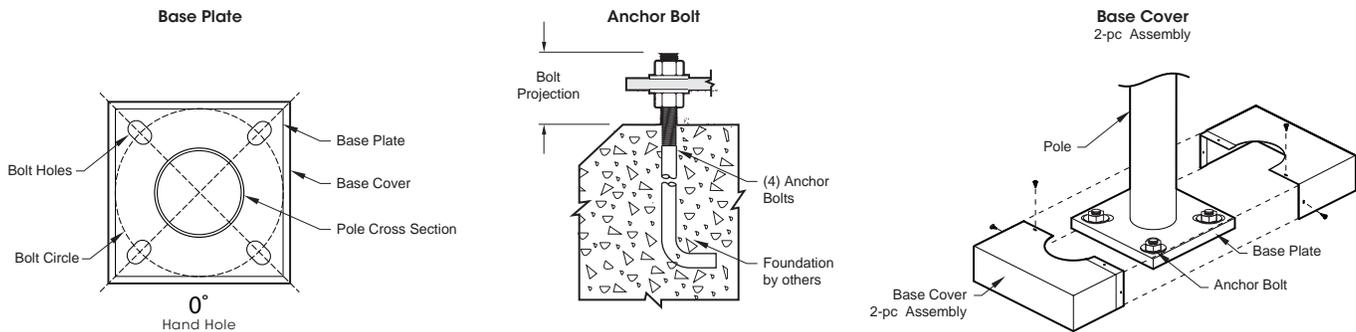

Catalog Number	POLE						Wall Thickness (In/Ga)	Weight (Lbs)	ANCHOR BOLTS				ANCHOR PLATE		
	Height		Bottom - Top						Bolt Size	Bolt Projection above grade ^{2,3}	Bolt Circle Dia Range ¹	Bolt Circle Dia (In) (Rec.) ¹	Template	Base Plate	Cover
	Fi	M	In	Cm	In	Cm									
RNTS 104-11	10	3.05	4.00	4.00	10.16	10.16	11	66	3/4" x 18" x 3"	3 1/4" - 3 3/4"	8" - 11"	9"	US9	3/4" x 10" x 10"	5" x 12" x 12"
RNTS 124-11	12	3.66	4.00	4.00	10.16	10.16	11	76	3/4" x 18" x 3"	3 1/4" - 3 3/4"	8" - 11"	9"	US9	3/4" x 10" x 10"	5" x 12" x 12"
RNTS 144-11	14	4.27	4.00	4.00	10.16	10.16	11	86	3/4" x 18" x 3"	3 1/4" - 3 3/4"	8" - 11"	9"	US9	3/4" x 10" x 10"	5" x 12" x 12"
RNTS 164-11	16	4.88	4.00	4.00	10.16	10.16	11	96	3/4" x 18" x 3"	3 1/4" - 3 3/4"	8" - 11"	9"	US9	3/4" x 10" x 10"	5" x 12" x 12"
RNTS 184-11	18	5.49	4.00	4.00	10.16	10.16	11	106	3/4" x 18" x 3"	3 1/4" - 3 3/4"	8" - 11"	9"	US9	3/4" x 10" x 10"	5" x 12" x 12"
RNTS 204-11	20	6.10	4.00	4.00	10.16	10.16	11	116	3/4" x 24" x 3"	3 1/4" - 3 3/4"	8" - 11"	10"	US10	3/4" x 10" x 10"	5" x 12" x 12"
RNTS 204-7	20	6.10	4.00	4.00	10.16	10.16	7	163	3/4" x 30" x 3"	3 1/4" - 3 3/4"	8" - 11"	11"	US11	3/4" x 10" x 10"	5" x 12" x 12"
RNTS 244-7	24	7.32	4.00	4.00	10.16	10.16	7	192	3/4" x 30" x 3"	3 1/4" - 3 3/4"	8" - 11"	11"	US11	3/4" x 10" x 10"	5" x 12" x 12"
RNTS 165-11	16	4.88	5.00	5.00	12.70	12.70	11	129	1" x 36" x 4"	4" - 4 1/2"	10 1/2" - 12 1/2"	12"	US12	1" x 11 1/2" x 11 1/2"	5" x 12" x 12"
RNTS 185-11	18	5.49	5.00	5.00	12.70	12.70	11	142	1" x 36" x 4"	4" - 4 1/2"	10 1/2" - 12 1/2"	12"	US12	1" x 11 1/2" x 11 1/2"	5" x 12" x 12"
RNTS 185-7	18	5.49	5.00	5.00	12.70	12.70	7	196	1" x 36" x 4"	4" - 4 1/2"	10 1/2" - 12 1/2"	12"	US12	1" x 11 1/2" x 11 1/2"	5" x 12" x 12"
RNTS 205-11	20	6.10	5.00	5.00	12.70	12.70	11	154	1" x 36" x 4"	4" - 4 1/2"	10 1/2" - 12 1/2"	12"	US12	1" x 11 1/2" x 11 1/2"	5" x 12" x 12"
RNTS 205-7	20	6.10	5.00	5.00	12.70	12.70	7	215	1" x 36" x 4"	4" - 4 1/2"	10 1/2" - 12 1/2"	12"	US12	1" x 11 1/2" x 11 1/2"	5" x 12" x 12"
RNTS 255-11	25	7.62	5.00	5.00	12.70	12.70	11	186	1" x 36" x 4"	4" - 4 1/2"	10 1/2" - 12 1/2"	12"	US12	1" x 11 1/2" x 11 1/2"	5" x 12" x 12"
RNTS 255-7	25	7.62	5.00	5.00	12.70	12.70	7	261	1" x 36" x 4"	4" - 4 1/2"	10 1/2" - 12 1/2"	12"	US12	1" x 11 1/2" x 11 1/2"	5" x 12" x 12"
RNTS 186-7	18	5.49	6.00	6.00	15.24	15.24	7	241	1" x 36" x 4"	4" - 4 1/2"	11 1/2" - 14 1/2"	12"	US12	1" x 13 1/2" x 13 1/2"	5" x 14" x 14"
RNTS 206-7	20	6.10	6.00	6.00	15.24	15.24	7	263	1" x 36" x 4"	4" - 4 1/2"	11 1/2" - 14 1/2"	12"	US12	1" x 13 1/2" x 13 1/2"	5" x 14" x 14"
RNTS 256-7	25	7.62	6.00	6.00	15.24	15.24	7	319	1" x 36" x 4"	4" - 4 1/2"	11 1/2" - 14 1/2"	12"	US12	1" x 13 1/2" x 13 1/2"	5" x 14" x 14"
RNTS 286-7	28	8.54	6.00	6.00	15.24	15.24	7	353	1 1/4" x 42" x 6"	4 1/4" - 4 3/4"	11 1/2" - 14 1/2"	13"	US13	1" x 13 1/2" x 13 1/2"	5" x 14" x 14"
RNTS 306-7	30	9.15	6.00	6.00	15.24	15.24	7	375	1 1/4" x 42" x 6"	4 1/4" - 4 3/4"	11 1/2" - 14 1/2"	14"	US14	1" x 13 1/2" x 13 1/2"	5" x 14" x 14"

1 - Not using correct bolt size or "(REC.) Recommended" Bolt Circle could result in Pole's failure.
 2 - Bolt Projection is calculated for slopes with 3 degrees or less.
 3 - For slopes greater than 3 degrees, please add Bolt Length Projection as necessary.

ORDERING INFORMATION

Spec/Order Example: RNTS205-7/1-90/RAL-6005-T

Pole Model Number	Mounting	Finish	Options																											
Pole Model Number	Mounting	Finish	Options																											
<p>4" Pole Dia.</p> <table border="1"> <thead> <tr> <th>Pole Model Number</th> <th>Pole Height</th> <th>Wall Thickness</th> </tr> </thead> <tbody> <tr><td><input type="checkbox"/> RNTS 104 - 11</td><td>10'</td><td>11</td></tr> <tr><td><input type="checkbox"/> RNTS 124 - 11</td><td>12'</td><td>11</td></tr> <tr><td><input type="checkbox"/> RNTS 144 - 11</td><td>14'</td><td>11</td></tr> <tr><td><input type="checkbox"/> RNTS 164 - 11</td><td>16'</td><td>11</td></tr> <tr><td><input type="checkbox"/> RNTS 184 - 11</td><td>18'</td><td>11</td></tr> <tr><td><input type="checkbox"/> RNTS 204 - 11</td><td>20'</td><td>11</td></tr> <tr><td><input type="checkbox"/> RNTS 204 - 7</td><td>20'</td><td>7</td></tr> <tr><td><input type="checkbox"/> RNTS 244 - 7</td><td>24'</td><td>7</td></tr> </tbody> </table>	Pole Model Number	Pole Height	Wall Thickness	<input type="checkbox"/> RNTS 104 - 11	10'	11	<input type="checkbox"/> RNTS 124 - 11	12'	11	<input type="checkbox"/> RNTS 144 - 11	14'	11	<input type="checkbox"/> RNTS 164 - 11	16'	11	<input type="checkbox"/> RNTS 184 - 11	18'	11	<input type="checkbox"/> RNTS 204 - 11	20'	11	<input type="checkbox"/> RNTS 204 - 7	20'	7	<input type="checkbox"/> RNTS 244 - 7	24'	7	<p>Tenon Mount</p> <p><input type="checkbox"/> 2 7/8" X 3" Tenon PT27 (Standard)</p> <p><input type="checkbox"/> 2 3/8" X 3" Tenon PT23</p> <p><input type="checkbox"/> 2 7/8" X 6" Tenon PT276</p> <p><input type="checkbox"/> Other Tenon Mt _____</p> <p>Drill Mount</p> <p><input type="checkbox"/> 1-90 </p> <p><input type="checkbox"/> 2-180 </p> <p><input type="checkbox"/> 2-90 </p> <p><input type="checkbox"/> 3-90 </p> <p><input type="checkbox"/> 4-90 </p> <p><input type="checkbox"/> 3-120 </p> <p>3-120 requires PT27 and T3120 Adapter</p> <p>2-90, 3-90, 4-90 requires PT27 and T490 Adapter</p> <p>When Drilling Pattern from other manufacturer is required, add "DP" to drill specifications (Example: 2-180DP) Drilling template must be provided.</p>	<p>Standard Smooth Finish</p> <p><input type="checkbox"/> Black RAL-9005-S</p> <p><input type="checkbox"/> White RAL-9003-S</p> <p><input type="checkbox"/> Grey RAL-7004-S</p> <p><input type="checkbox"/> Dark Bronze RAL-8019-S</p> <p><input type="checkbox"/> Green RAL-6005-S</p> <p>Premium Finishes</p> <p><input type="checkbox"/> Rust</p> <p><input type="checkbox"/> Patina Copper PC</p> <p><input type="checkbox"/> Custom Specify RAL# _____</p> <p><input type="checkbox"/> Galvanized GLV</p> <p>For Smooth Finish replace suffix "T" with suffix "T" Example: RAL-9005-S</p> <p>See USALTG.COM for additional colors</p>	<p><input type="checkbox"/> Vibration Dampener 2nd Mode Field Install VBDS-M2</p> <p>Receptacle</p> <p><input type="checkbox"/> G.F.I. Receptacle w/ Cover GFI</p> <p><input type="checkbox"/> G.F.I. Receptacle w/ In-Use Cover GFI-U [Specify GFI location: Height and Direction] See Location Diagram below</p> <p><input type="checkbox"/> 3 Way Adapter T3120</p> <p><input type="checkbox"/> 4 Way Adapter T490</p> <p>Coupling</p> <p><input type="checkbox"/> 1/2" Coupling CPLN12</p> <p><input type="checkbox"/> 3/4" Coupling CPLN34</p> <p><input type="checkbox"/> 1 1/4" Coupling CPLN114</p> <p><input type="checkbox"/> 1 1/2" Coupling CPLN112</p> <p><input type="checkbox"/> 2" Coupling CPLN2 [Specify Coupling location: Height and Direction] See Location Diagram below</p> <p>Nipple</p> <p><input type="checkbox"/> 1/2" Nipple NPLE12</p> <p><input type="checkbox"/> 3/4" Nipple NPLE34</p> <p><input type="checkbox"/> 1 1/4" Nipple NPLE114</p> <p><input type="checkbox"/> 1 1/2" Nipple NPLE112</p> <p><input type="checkbox"/> 2" Nipple NPLE2 [Specify Coupling location: Height and Direction] See Location Diagram below</p> <p>Location Diagram Please use this diagram to indicate placement location</p> <p>Refer to the Accessories Section for other options</p>
Pole Model Number	Pole Height	Wall Thickness																												
<input type="checkbox"/> RNTS 104 - 11	10'	11																												
<input type="checkbox"/> RNTS 124 - 11	12'	11																												
<input type="checkbox"/> RNTS 144 - 11	14'	11																												
<input type="checkbox"/> RNTS 164 - 11	16'	11																												
<input type="checkbox"/> RNTS 184 - 11	18'	11																												
<input type="checkbox"/> RNTS 204 - 11	20'	11																												
<input type="checkbox"/> RNTS 204 - 7	20'	7																												
<input type="checkbox"/> RNTS 244 - 7	24'	7																												
<p>5" Pole Dia.</p> <table border="1"> <tbody> <tr><td><input type="checkbox"/> RNTS 165 - 11</td><td>16'</td><td>11</td></tr> <tr><td><input type="checkbox"/> RNTS 185 - 11</td><td>18'</td><td>11</td></tr> <tr><td><input type="checkbox"/> RNTS 185 - 7</td><td>18'</td><td>7</td></tr> <tr><td><input type="checkbox"/> RNTS 205 - 11</td><td>20'</td><td>11</td></tr> <tr><td><input type="checkbox"/> RNTS 205 - 7</td><td>20'</td><td>7</td></tr> <tr><td><input type="checkbox"/> RNTS 255 - 11</td><td>25'</td><td>11</td></tr> <tr><td><input type="checkbox"/> RNTS 255 - 7</td><td>25'</td><td>7</td></tr> </tbody> </table>	<input type="checkbox"/> RNTS 165 - 11	16'	11	<input type="checkbox"/> RNTS 185 - 11	18'	11	<input type="checkbox"/> RNTS 185 - 7	18'	7	<input type="checkbox"/> RNTS 205 - 11	20'	11	<input type="checkbox"/> RNTS 205 - 7	20'	7	<input type="checkbox"/> RNTS 255 - 11	25'	11	<input type="checkbox"/> RNTS 255 - 7	25'	7									
<input type="checkbox"/> RNTS 165 - 11	16'	11																												
<input type="checkbox"/> RNTS 185 - 11	18'	11																												
<input type="checkbox"/> RNTS 185 - 7	18'	7																												
<input type="checkbox"/> RNTS 205 - 11	20'	11																												
<input type="checkbox"/> RNTS 205 - 7	20'	7																												
<input type="checkbox"/> RNTS 255 - 11	25'	11																												
<input type="checkbox"/> RNTS 255 - 7	25'	7																												
<p>6" Pole Dia.</p> <table border="1"> <tbody> <tr><td><input type="checkbox"/> RNTS 186 - 7</td><td>18'</td><td>7</td></tr> <tr><td><input type="checkbox"/> RNTS 206 - 7</td><td>20'</td><td>7</td></tr> <tr><td><input type="checkbox"/> RNTS 256 - 7</td><td>25'</td><td>7</td></tr> <tr><td><input type="checkbox"/> RNTS 286 - 7</td><td>28'</td><td>7</td></tr> <tr><td><input type="checkbox"/> RNTS 306 - 7</td><td>30'</td><td>7</td></tr> </tbody> </table> <p>Other heights available Please consult factory</p>	<input type="checkbox"/> RNTS 186 - 7	18'	7	<input type="checkbox"/> RNTS 206 - 7	20'	7	<input type="checkbox"/> RNTS 256 - 7	25'	7	<input type="checkbox"/> RNTS 286 - 7	28'	7	<input type="checkbox"/> RNTS 306 - 7	30'	7															
<input type="checkbox"/> RNTS 186 - 7	18'	7																												
<input type="checkbox"/> RNTS 206 - 7	20'	7																												
<input type="checkbox"/> RNTS 256 - 7	25'	7																												
<input type="checkbox"/> RNTS 286 - 7	28'	7																												
<input type="checkbox"/> RNTS 306 - 7	30'	7																												

OPTIONS



GFI
Duplex GFI
w/ Cover



GFI-U
Duplex GFI
w/ In-Use Cover



T3120
3 Way Adapter



T490
4 Way Adapter



FRBC
Flat Round Base Cover



RBC
Round Base Cover




CPLN
1/2", 3/4", 1 1/4", 1 1/2",
or 2" Coupling



NPLE
1/2", 3/4", 1 1/4", 1 1/2",
or 2" Nipple

WIND MAP

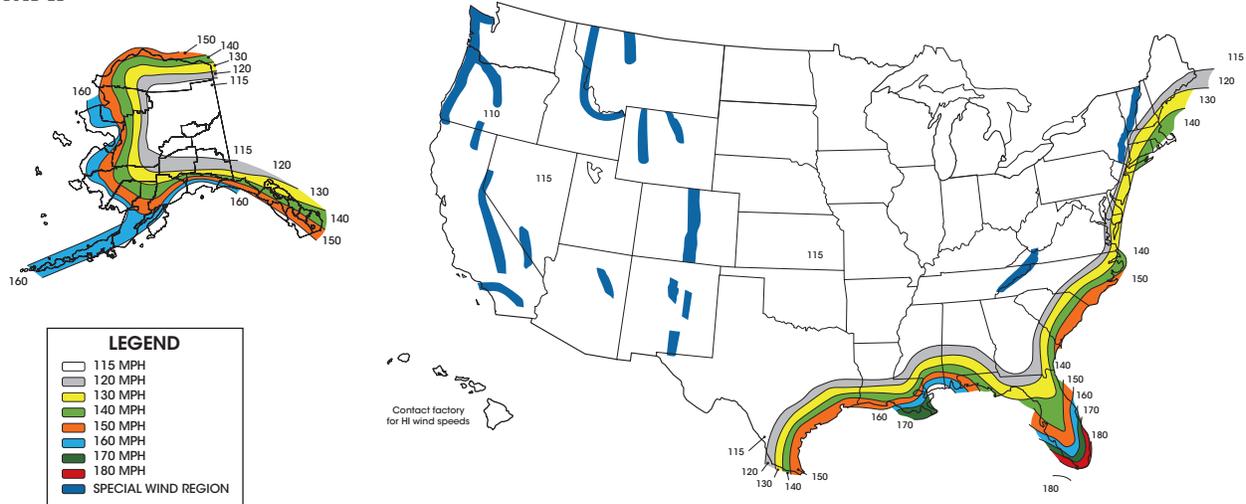

EPA INFORMATION (ft²) (per AASHTO LRFDLTS-1 revised 2022)

Cat. No.	Weight Capacity Maximum (Lbs.)	100 MPH	110 MPH	115 MPH	120 MPH	130 MPH	140 MPH	150 MPH	160 MPH	170 MPH	180 MPH
RNTS 104-11	300 - 252*	15.0	15.0	15.0	15.0	14.4	12.4	10.6	9.0	8.2	7.2
RNTS 124-11	300 - 182*	15.0	15.0	15.0	13.6	11.2	9.6	7.8	6.8	6.2	5.2
RNTS 144-11	300 - 143.5*	15.0	13.5	12.1	10.9	9.1	7.5	6.3	5.1	4.7	4.1
RNTS 164-11	300 - 87.5*	13.1	10.3	9.1	8.1	6.7	5.1	4.1	3.5	3.3	2.5
RNTS 184-11	300 - 66.5*	10.9	8.3	7.3	6.7	4.9	3.7	2.9	2.7	2.3	1.9
RNTS 204-11	300 - 60*	9.0	7.0	5.8	5.0	3.6	2.6	1.8	1.4	1.3	1.2
RNTS 204-7	300 - 105*	15.0	14.0	12.1	9.4	7.8	6.4	4.8	4.2	3.6	3.0
RNTS 244-7	300 - 60*	10.2	8.0	6.3	5.0	3.9	3.0	2.2	1.8	1.5	0.9
RNTS 165-11	300 - 262.5*	15.0	15.0	15.0	15.0	15.0	15.0	13.3	10.7	9.1	7.5
RNTS 185-11	300 - 182*	15.0	15.0	15.0	15.0	15.0	12.8	10.0	8.0	6.6	5.2
RNTS 185-7	300 - 217*	15.0	15.0	15.0	15.0	15.0	14.6	12.2	9.6	8.0	6.2
RNTS 205-11	300 - 129.5*	15.0	12.5	10.9	9.1	7.8	6.6	5.5	4.8	4.3	3.7
RNTS 205-7	300 - 154*	15.0	15.0	15.0	15.0	14.8	12.0	9.2	7.2	5.8	4.4
RNTS 255-11	300 - 60*	9.4	6.8	5.4	5.0	4.0	3.2	2.6	1.8	1.8	1.4
RNTS 255-7	300 - 126*	15.0	12.6	10.8	9.6	8.2	6.8	5.8	4.6	4.2	3.6
RNTS 186-7	300	15.0	15.0	15.0	15.0	15.0	15.0	15.0	13.5	12.1	10.5
RNTS 206-7	300	15.0	15.0	15.0	15.0	15.0	15.0	13.6	11.8	10.4	9.2
RNTS 256-7	300	15.0	15.0	15.0	15.0	15.0	15.0	14.2	12.0	10.2	8.8
RNTS 286-7	300 - 189*	15.0	15.0	15.0	13.8	11.4	9.6	8.4	7.2	6.2	5.4
RNTS 306-7	300 - 161*	15.0	15.0	13.2	12.0	9.8	8.2	7.2	5.8	5.0	4.6

EPA INFORMATION (ft²) (per 2020 FL Building Code)

Cat. No.	Weight Capacity Maximum (Lbs.)	120 MPH	130 MPH	140 MPH	150 MPH	160 MPH	170 MPH	180 MPH
RNTS 104-11	300 - 154*	8.6	7.8	7.1	6.5	5.5	5.0	4.4
RNTS 124-11	224 - 112*	6.4	5.8	5.3	4.8	4.2	3.8	3.2
RNTS 144-11	179 - 87.5*	5.1	4.7	4.2	3.9	3.1	2.9	2.5
RNTS 164-11	115.5 - 60*	3.3	3.0	2.8	2.5	2.1	2.0	1.5
RNTS 184-11	84 - 60*	2.4	2.1	2.0	1.8	1.7	1.4	1.2
RNTS 204-11	168 - 60*	4.8	3.4	2.5	1.7	1.3	1.2	1.1
RNTS 204-7	300 - 101.5*	8.9	7.4	6.1	4.6	4.0	3.4	2.9
RNTS 244-7	168 - 60*	4.8	3.7	2.9	2.1	1.7	1.4	0.9
RNTS 165-11	300 - 161*	10.8	9.8	9.0	8.1	6.5	5.6	4.6
RNTS 185-11	283.5 - 112*	8.1	7.4	6.7	6.1	4.9	4.0	3.2
RNTS 185-7	300 - 133*	9.9	9.0	8.2	7.5	5.9	4.9	3.8
RNTS 205-11	300 - 122.5*	8.6	7.4	6.3	5.2	4.6	4.1	3.5
RNTS 205-7	262.5 - 94.5*	7.5	6.8	6.2	5.6	4.4	3.5	2.7
RNTS 255-11	73.5 - 60*	2.1	1.9	1.8	1.6	1.4	1.1	0.9
RNTS 255-7	164.5 - 77*	4.7	4.3	3.9	3.5	3.0	2.6	2.2
RNTS 186-7	300 - 224*	12.2	11.1	10.1	9.2	8.3	7.4	6.4
RNTS 206-7	300 - 196*	11.1	10.1	9.2	8.3	7.2	6.4	5.6
RNTS 256-7	238 - 112*	6.8	6.2	5.7	5.1	4.3	3.7	3.2
RNTS 286-7	238 - 115.5*	6.8	6.2	5.7	5.1	4.4	3.8	3.3
RNTS 306-7	206.5 - 98*	5.9	5.3	4.8	4.4	3.5	3.1	2.8

* Please use the following to obtain the proper weight capacity:
 The maximum fixture weight equals 60 lbs., or the product of 35 lbs. x the EPA value (from the chart above), whichever is greater, not to exceed 300 lbs.
 Example, EPA = 2.2, maximum fixture weight = 35 lbs. x 2.2 EPA = 77 lbs.


- Notes**
- Specifier is responsible for correct pole selection. For proper pole choice, the specifier must consider the total EPA of fixtures, banners, arms, and any other accessories attached to pole assembly.
 - U.S. Outdoor Lighting discourages the attachment of unauthorized accessories; any such attachments will void the manufacturer's warranty.
 - ALL EPAs are calculated for ground installations. For installations on bridges, buildings or other structures, the specifier must contact the factory or consult with a Structural Engineer.
 - Unpredictable aerodynamic forces such as 2nd Mode (Aeolian) wind-induced vibrations are not included in wind velocity ratings or EPA ratings.
 - Wind gust factors are considered in developing all EPA chart data.

- To mitigate 2nd Mode (Aeolian) Vibration please read the following Recommendations:**
- We do not recommend the installation of poles without a fixture; such installations have been known to fail due to destructive 2nd mode pole vibration.
 - Pole installations with a combined (fixtures, banners, flags, etc.) EPA of less than 2.0 ft² and 25 feet or taller are strongly recommended to be installed with a Vibration Dampener. Please consult with your Structural Engineer for site-specific requirements.
 - U.S. Outdoor Lighting offers a 2nd Mode Vibration Dampener VBDS-M2 for purchase as a field-installable option.


ANCHOR BOLT TEMPLATES

For printable versions of Templates: click on the Template's name, otherwise go to <https://usalgt.com/downloads/templates.html>.


US8
8" Bolt Circle




US9
9" Bolt Circle

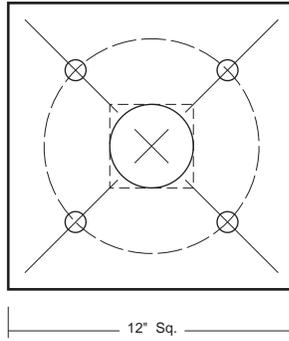


US10
10" Bolt Circle

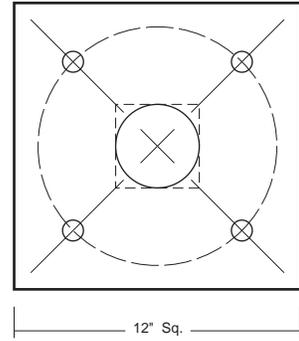


US11
11" Bolt Circle




US12
12" Bolt Circle

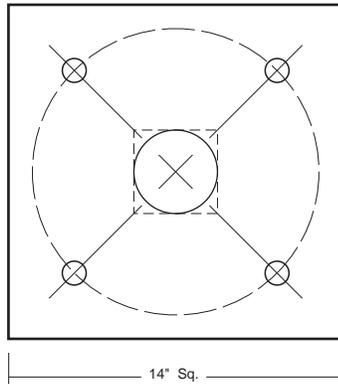


US13
13" Bolt Circle

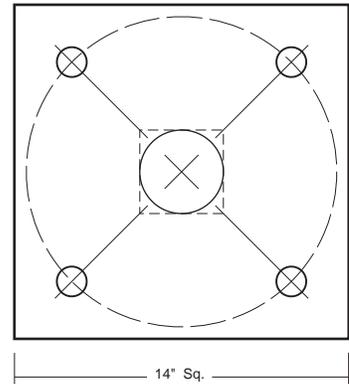

US14
14" Bolt Circle

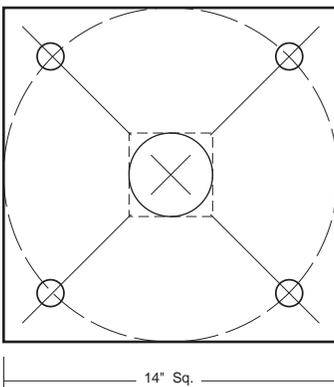

US15
15" Bolt Circle

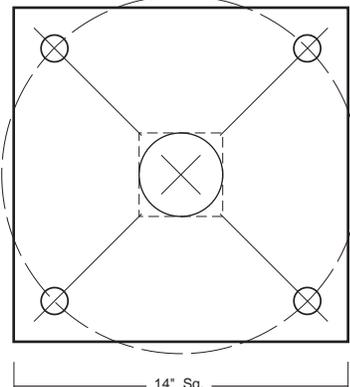

US16
16" Bolt Circle

