

TENON MOUNTED ARM

XAB

PROJECT NAME: _____

PROJECT TYPE: _____

FEATURES

Arm

Durable corrosion resistant, cast aluminum construction.


Finish

Electrostatically applied TGIC Polyester Powder Coat on substrate prepared with 20 PSI power wash at 140°F. Four step media blast and iron phosphate pretreatment for protection and paint adhesion. 400°F bake for maximum hardness and durability.




XAB


Patent pending

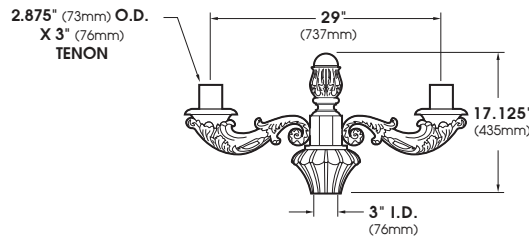

XAB-2-180
EPA = 1.01



XAB-1
EPA = 0.70

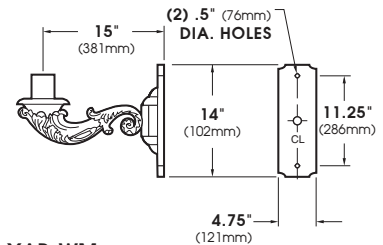









XAB-WM
EPA = 0.51

SCALE: 1/2"=1'

ORDERING INFORMATION

Spec/Order Example: XAB-3-180/RAL-9003-S

Configuration	<input type="checkbox"/>  XAB-WM	<input type="checkbox"/>  XAB-1	<input type="checkbox"/>  XAB-2-180	<input type="checkbox"/>  XAB-3-180	<input type="checkbox"/>  XAB-3-120	<input type="checkbox"/>  XAB-4-120	<input type="checkbox"/>  XAB-4-90	<input type="checkbox"/>  XAB-5-90
Finish*	<input type="checkbox"/> Black RAL-9005-T	<input type="checkbox"/> White RAL-9003-T	<input type="checkbox"/> Grey RAL-7004-T	<input type="checkbox"/> Dark Bronze RAL-8019-T	<input type="checkbox"/> Green RAL-6005-T	*Standard texture finish For smooth finish replace suffix "T" with suffix "S" (Example: RAL-9005-S) Consult factory for custom colors		