

PENDANT MOUNTED ARM

XMR

PROJECT NAME: _____

PROJECT TYPE: _____

FEATURES

Arm

Extruded aluminum arm that bolts to the pole with 2 bolts. Fixture mounts to arm with 2 bolts through the side of the driver housing. A wiring harness is provided through the arm assembly terminating in the driver housing with quick-connects. All hardware is stainless steel.

Finish


Electrostatically applied TGIC Polyester Powder Coat on substrate prepared with 20 PSI power wash at 140°F. Four step media blast and iron phosphate pretreatment for protection and paint adhesion. 400°F bake for maximum hardness and durability.




XMR*

Shown w/ optional Dome Cap


Patent pending



XMR-2-180
EPA = 1.10



XMR-1
EPA = 0.39

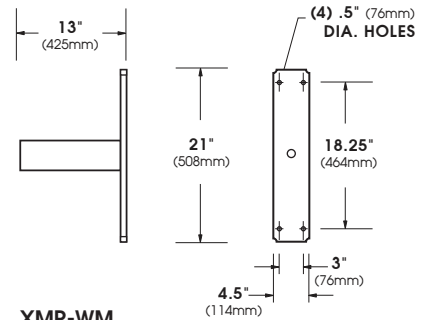







XMR-WM
EPA = 0.52

SCALE: 1/2"=1'

ORDERING INFORMATION

Spec/Order Example: XMR-2-180/RAL-8019-S

Configuration	<input type="checkbox"/>  XMR-WM	<input type="checkbox"/>  XMR-1	<input type="checkbox"/>  XMR-2-180	<input type="checkbox"/>  XMR-3-180	<input type="checkbox"/>  XMR-3-120	<input type="checkbox"/>  XMR-4-90
Finish*	<input type="checkbox"/> Black RAL-9005-T	<input type="checkbox"/> White RAL-9003-T	<input type="checkbox"/> Grey RAL-7004-T	<input type="checkbox"/> Dark Bronze RAL-8019-T	<input type="checkbox"/> Green RAL-6005-T	<p>*Standard texture finish</p> <p>For smooth finish replace suffix "T" with suffix "S" (Example: RAL-9005-S)</p> <p>Consult factory for custom colors</p>