


SIDE MOUNTED ARM

ASL/SSL

PROJECT NAME: _____

PROJECT TYPE: _____

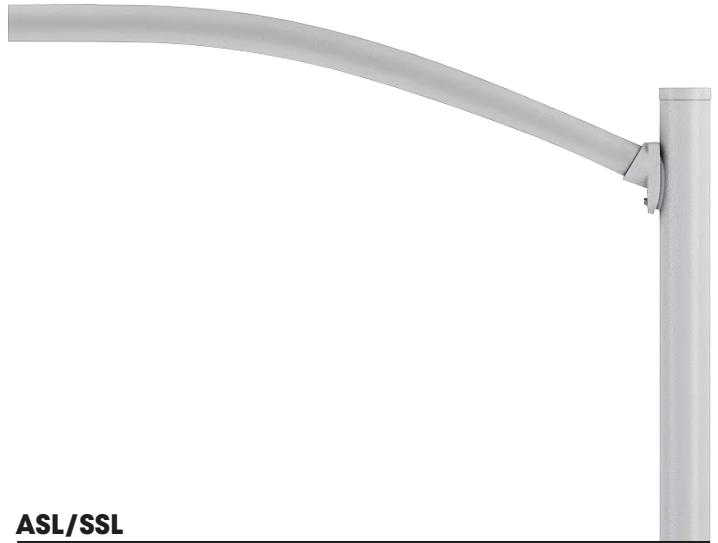

ASL/SSL

FEATURES


Arm

Aluminum: Clamp on bracket with 2" pipe (2 3/8" O.D.) extruded from 6063 alloy aluminum heat treated to produce a T6 temper.

Steel: Cast iron clamp on bracket with 2" steel pipe (2 3/8" O.D.) constructed from high grade structural steel.

Finish

Electrostatically applied TGIC Polyester Powder Coat on substrate prepared with 20 PSI power wash at 140°F. Four step media blast and iron phosphate pretreatment for protection and paint adhesion. 400°F bake for maximum hardness and durability.

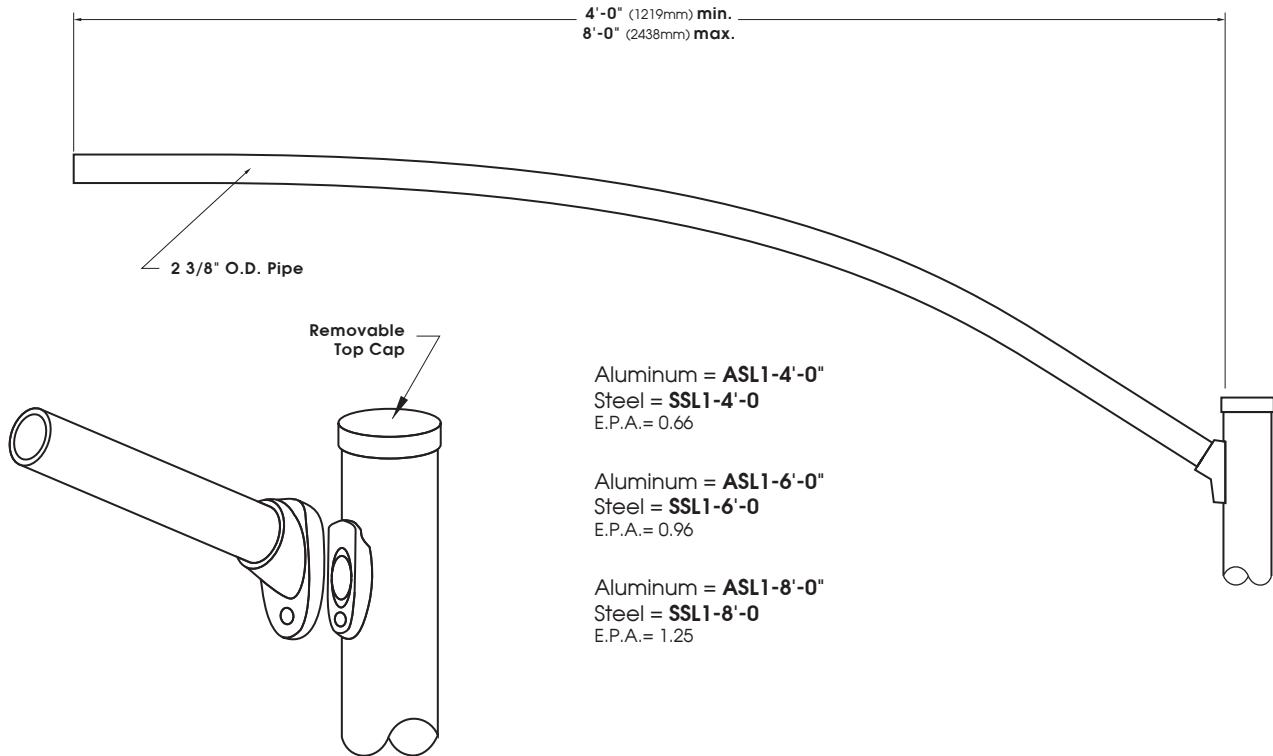

SCALE: 1/2"=1'

ASL/SSL

ORDERING INFORMATION

Spec/Order Example: ASL-2-180/6'-0"/RAL-6005-S

Configuration	<input type="checkbox"/> ASL-1 <input type="checkbox"/> SSL-1	<input type="checkbox"/> ASL-2-180 <input type="checkbox"/> SSL-2-180	<input type="checkbox"/> ASL-3-90 <input type="checkbox"/> SSL-3-90	<input type="checkbox"/> ASL-3-120 <input type="checkbox"/> SSL-3-120	<input type="checkbox"/> ASL-4-90 <input type="checkbox"/> SSL-4-90
Width	<input type="checkbox"/> 4'-0"	<input type="checkbox"/> 6'-0"	<input type="checkbox"/> 8'-0"		
Finish*	<input type="checkbox"/> Black RAL-9005-S	<input type="checkbox"/> White RAL-9003-S	<input type="checkbox"/> Grey RAL-7004-S	<input type="checkbox"/> Dark Bronze RAL-8019-S	<input type="checkbox"/> Green RAL-6005-S

*Aluminum standard texture finish
 Steel supplied with smooth finish
 For smooth finish replace suffix "T" with
 suffix "S"
 (Example: RAL-9005-S)
 Consult factory for custom colors

Note:
 ASL/SL Arm to be purchased in conjunction with U.S. Architectural or Sun Valley pole.