


AMWM-CSR

Wall Pack

Field Selectable Output & CCT

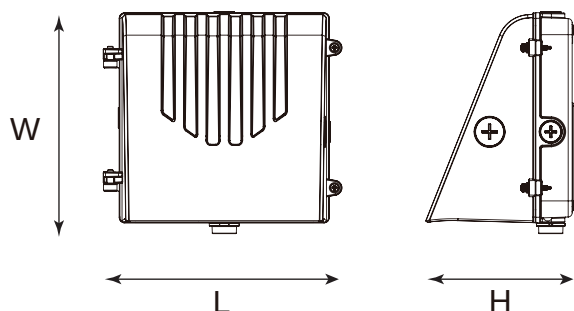

Model #	L (in)	W (in)	H (in)	Weight (lbs)
AMWM-CSR9	10.06	8.86	6.25	3.98
AMWM-CSR17	14.49	9.25	6.44	5.97

PROJECT NAME:

FIXTURE TYPE:

SPECIFICATIONS

Housing:

Die Cast Aluminum Housing and Front Frame. Stainless Steel Hardware. Housing comes standard with Sensor Ready Receptacle & Screw-In Sensor Receptacle. Conduit Entries With Plugs.

Finish:

Dark Bronze Premium Polyester Powdercoat

Listings & Ratings:

cUL Listed For Wet Location. DLC Premium Listed. IP65 Listed for Ingress. IK08 Listed for Impact.

Lens / Optics:

UV Stabilized Polycarbonate Lens.

LED's:

Long Life LED's provide a TM-21-11 calculated L90 of 51,000 hrs and L70 of 167,000 hrs. CCT is Field Selectable in 3000K(WW), 4000K(NW), and 5000K (CW). All CCT's have a 80CRI Min. Color Shift of <0.0034 ($\Delta u'v'$) over initial 6,000 hrs of operation.

Four-Step Field Selectable Wattage / Lumen Output*:

AMWM-CSR9 4,815 - 9,010 Nominal Lumens / 30 - 60 Watts

AMWM-CSR17 9,337 - 17,186 Nominal Lumens / 60 - 120 Watts

*See Lumen / Wattage Tables For Field Selected Options

Driver:

Electronic Driver Available in 120-277V 50/60Hz. Drivers have a THD < 20% and a PF > 0.90. Integral 6kV Surge Protection. Drivers are 0-10V Standard Dimming. Luminaire has an Ambient Operating Temperature Range from -40°C to 50°C (-40°F to 122°F).

Controls & Sensors:

Integrated Photocell. Photocell can be enabled/disabled via an internal switch. Sensor Ready.

Mounting Options:

Wall Mount Kit.

Warranty:

5 Year Electronics & Housing Warranty in -40°C to +50°C Environments.

CERTIFICATIONS & LISTINGS:



2026006

ORDERING

MODEL	OPTIONS
AMWM-CSR9	HD09VR-PH5-1 PIR Motion Sensor (Max Height = 39ft)* HD09VR-MH5-1 Microwave Step Dimming Sensor (Max Height = 49ft)* HD05R Remote Programmer for HD09VR Sensors EM8 8 Watt Emergency Driver SP10 10kV Parallel Surge Protector
AMWM-CSR17	

*HD05R is Required for Altering Factory Sensor Settings. Factory settings are Detection Area = 100%, Stand By Period = 0 Sec, Stand By Dimming Level = 10%, Daylight Threshold = Disabled.

Ordering Example: AMWM-CSR8 / HD09VR-PH-1 / HD05R / SP10

LUMEN / WATTAGE TABLES


Output Setting CCT Setting	30W			40W			50W			60W		
	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
AMWM-CSR9 Lumens	4815	5015	5024	6043	6295	6308	7644	8042	8000	8529	9010	8916
Watts	31.3	30.6	31.2	39.9	39.0	39.8	52.0	50.1	52.0	59.1	57.2	59.0
Efficacy	153.9	164.1	160.9	151.3	161.5	158.5	146.9	159.1	153.9	144.2	157.5	151.3

Output Setting CCT Setting	60W			80W			100W			120W		
	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
AMWM-CSR17 Lumens	9337	9638	9740	12067	12561	12586	14370	15090	15010	16282	17186	16980
Watts	59.6	58.5	59.4	78.9	77.0	78.8	96.3	93.8	96.3	111.8	108.4	111.5
Efficacy	156.6	164.8	163.6	153.0	163.1	159.8	149.2	160.9	155.9	145.6	158.6	152.3

PHOTOMETRY

AMWM-CSR9

Output Setting = 60W (57.2 Watts)
 CCT Setting = 4000K
 Distribution = Type-III
 Total Lumens = 9010
 Max CD = 3710 (360H, 25V)
 B3-U0-G1

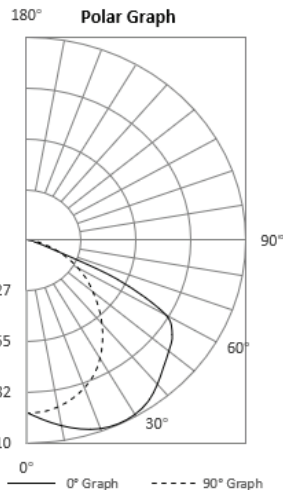

AMWM-CSR17

Output Setting = 120W (108.4 Watts)
 CCT Setting = 4000K
 Distribution = Type-III
 Total Lumens = 17186
 Max CD = 6670 (360H, 28V)
 B3-U0-G2

