



PROJECT NAME: _____

FIXTURE TYPE: _____

QSRNTA

ROUND NON-TAPERED ALUMINUM POLE



Shaft

6063-T6 extruded aluminum tubing with hand hole and cover. Ground lugs are provided at the cast aluminum base plate.

Side Mount Drilling

Includes removable pole cap. Standard drilling matches U.S. Architectural fixtures. Specify "DP" for alternate drill patterns (example: 2-180DP).

Pole Top Mount

Standard PT27 mount uses 3" tall (2.875" O.D.) aluminum pipe. Other tenon and pole-top configurations are available.

Hand Hole Cover

Heavy-gauge aluminum 3" x 5" cover with 2¼" x 4¼" access opening, secured with aluminum bar and tamper-resistant stainless steel screw.

Base Plate

A-356-T6 cast aluminum base with eight reinforcing gussets, telescoped and circumferentially welded to the shaft.

Anchorage

Four galvanized steel anchor bolts, 50,000 PSI minimum yield strength, with "L" bend, threaded ends, two nuts and two washers per bolt.

Base Cover

Two-piece, heavy-wall aluminum cover conceals the base.

Finish

TGIC polyester powder coat over media-blasted and iron-phosphate-pretreated aluminum; baked at 400°F for durability and adhesion.






QUICK REFERENCE	
Max Diameter	5"
Max Wall Thickness	0.188"
Max Height	20'
Finish	Black, Dark Bronze, Grey

QSRNTA

SELECT CONFIGURATIONS
ACCELERATED LEAD TIME

POLE				ANCHOR BOLTS			MAX E.P.A.				
CATALOG #	MOUNTING HEIGHT (ft)	DIAMETER (in)	WALL THICKNESS (In/Ga)	BOLT SIZE	BOLT CIRCLE DIA RANGE	BOLT CIRCLE DIA (In)	100 MPH	120 MPH	140 MPH	160 MPH	180 MPH
QSRNTA 104-125	10	4.00	0.125	3/4" x 18" x 3"	9 1/2" - 10 1/2"	10"	10.3	6.5	4.2	3.1	2.2
QSRNTA 124-125	12	4.00	0.125	3/4" x 18" x 3"	9 1/2" - 10 1/2"	10"	7.5	4.4	2.8	1.7	1.2
QSRNTA 144-125	14	4.00	0.125	3/4" x 18" x 3"	9 1/2" - 10 1/2"	10"	5.7	3.1	1.4	0.9	0.5
QSRNTA 105-125	10	5.00	0.125	3/4" x 24" x 3"	11" - 12"	12"	17.4	11.4	8.1	5.9	4.7
QSRNTA 125-125	12	5.00	0.125	3/4" x 24" x 3"	11" - 12"	12"	13.3	8.3	5.8	4.4	3.3
QSRNTA 145-125	14	5.00	0.125	3/4" x 24" x 3"	11" - 12"	12"	10.5	6.1	4.3	3.2	2.4
QSRNTA 145-188	14	5.00	0.188	3/4" x 24" x 3"	11" - 12"	12"	16.9	10.8	7.4	5.6	4.1
QSRNTA 165-125	16	5.00	0.125	3/4" x 24" x 3"	11" - 12"	12"	7.3	4.1	2.8	1.8	1.4
QSRNTA 165-188	16	5.00	0.188	3/4" x 24" x 3"	11" - 12"	12"	12.6	7.6	5.4	3.9	3.0
QSRNTA 185-125	18	5.00	0.125	3/4" x 24" x 3"	11" - 12"	12"	5.4	2.6	1.7	0.9	0.5
QSRNTA 185-188	18	5.00	0.188	3/4" x 24" x 3"	11" - 12"	12"	10.2	5.7	3.8	2.7	2.1
QSRNTA 205-188	20	5.00	0.188	3/4" x 24" x 3"	11" - 12"	12"	7.8	4.2	2.8	1.7	1.3

BOLT CIRCLE

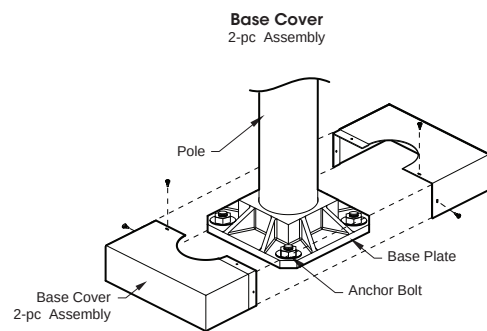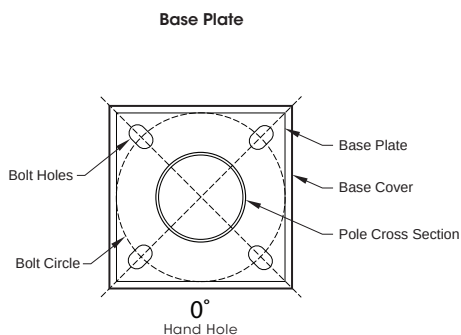

INCLUDED IN QUICK SHIP PROGRAM

- Fixture mounting holes or tenon top - Specify
- Full base cover
- Anchor bolts - Fully galvanized
- Other finishes available - Contact Factory for lead time and prices
- Satin finish - deduct \$8 per foot

Full Freight Allowed \$4,000

**SHIPS IN
3 WEEKS**