



PROJECT NAME: _____

FIXTURE TYPE: _____

QSRNTS

ROUND NON-TAPERED STEEL POLE



Shaft

Round structural steel tube conforming to ASTM A501, 46,000 PSI minimum yield strength. 11 GA (.120") or 7 GA (.180") wall. Internal ground lug opposite hand hole.

Drilling - Side Mount

Includes removable pole cap. Standard drilling matches U.S. Architectural fixtures. For custom drilling, specify "DP" after drill pattern (e.g., 2-180DP).

Pole Top Mount

Standard PT27 mount: 3" tall (2.875" O.D.) steel pipe. Tenon options available; consult factory for custom configurations.

Hand Hole Cover

15' and above: Reinforced 2" x 4" access opening with 3" x 5" heavy-gauge aluminum cover.

Under 15': 2¼" x 4¼" access opening with 3" x 5" heavy-gauge aluminum cover.

Both secured with aluminum bar and tamper-resistant stainless steel screw.

Base Plate

Hot-rolled structural steel, 36,000 PSI minimum yield strength, telescoped and circumferentially welded to shaft. Slotted holes provide ±1" bolt-circle adjustment.

Anchorage

Four galvanized L-bend steel anchor bolts, 50,000 PSI minimum yield strength. Includes two nuts and two washers per bolt.

Base Cover

Two-piece heavy-gauge carbon steel cover.

Finish

TGIC polyester powder coat over power-washed, media-blasted and iron-phosphate-pretreated steel; baked at 400°F for durability.




QUICK REFERENCE	
Max Diameter	5"
Max Wall Thickness	11Ga
Max Height	25'
Finish	Black, Dark Bronze, Grey

QSRNTS

SELECT CONFIGURATIONS
ACCELERATED LEAD TIME

POLE				ANCHOR BOLTS			MAX E.P.A.				
CATALOG #	MOUNTING HEIGHT (ft)	DIAMETER (in)	WALL THICKNESS (In/Ga)	BOLT SIZE	BOLT CIRCLE DIA RANGE	BOLT CIRCLE DIA (In)	100 MPH	120 MPH	140 MPH	160 MPH	180 MPH
QSRNTS 104-11	10	4.00	11	3/4" x 18" x 3"	8" - 11"	9"	15.0	15.0	12.4	9.0	7.2
QSRNTS 124-11	12	4.00	11	3/4" x 18" x 3"	8" - 11"	9"	15.0	13.6	9.6	6.8	5.2
QSRNTS 144-11	14	4.00	11	3/4" x 18" x 3"	8" - 11"	9"	15.0	10.9	7.5	5.1	4.1
QSRNTS 164-11	16	4.00	11	3/4" x 18" x 3"	8" - 11"	9"	13.1	8.1	5.1	3.5	2.5
QSRNTS 184-11	18	4.00	11	3/4" x 18" x 3"	8" - 11"	9"	10.9	6.7	3.7	2.7	1.9
QSRNTS 204-11	20	4.00	11	3/4" x 24" x 3"	8" - 11"	10"	9.0	5.0	2.6	1.4	1.2
QSRNTS 204-7	20	4.00	7	3/4" x 30" x 3"	8" - 11"	11"	15.0	9.4	6.4	4.2	3.0
QSRNTS 244-7	24	4.00	7	3/4" x 30" x 3"	8" - 11"	11"	10.2	5.0	3.0	1.8	0.9
QSRNTS 165-11	16	5.00	11	1" x 36" x 4"	10 1/2" - 12 1/2"	12"	15.0	15.0	15.0	10.7	7.5
QSRNTS 185-11	18	5.00	11	1" x 36" x 4"	10 1/2" - 12 1/2"	12"	15.0	15.0	12.8	8.0	5.2
QSRNTS 185-7	18	5.00	7	1" x 36" x 4"	10 1/2" - 12 1/2"	12"	15.0	15.0	14.6	9.6	6.2
QSRNTS 205-11	20	5.00	11	1" x 36" x 4"	10 1/2" - 12 1/2"	12"	15.0	9.1	6.6	4.8	3.7
QSRNTS 205-7	20	5.00	7	1" x 36" x 4"	10 1/2" - 12 1/2"	12"	15.0	15.0	12.0	7.2	4.4
QSRNTS 255-11	25	5.00	11	1" x 36" x 4"	10 1/2" - 12 1/2"	12"	9.4	5.0	3.2	1.8	1.4
QSRNTS 255-7	25	5.00	7	1" x 36" x 4"	10 1/2" - 12 1/2"	12"	15.0	9.6	6.8	4.6	3.6

BOLT CIRCLE

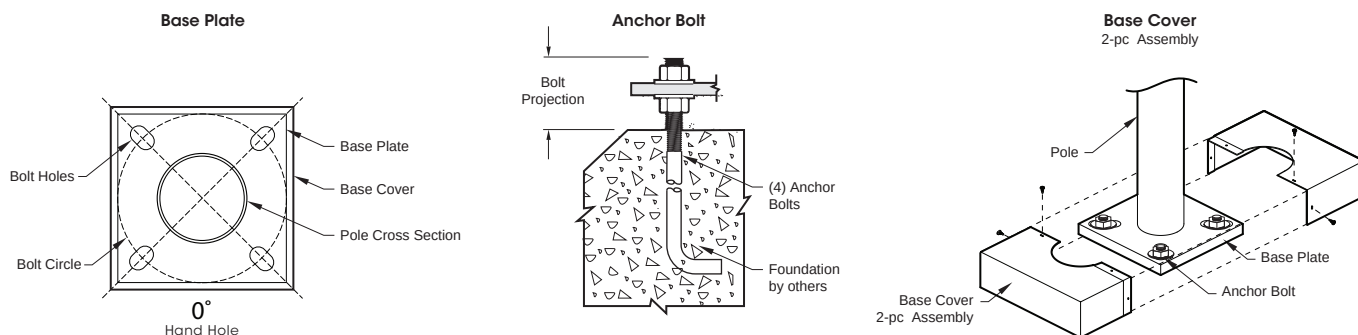

INCLUDED IN QUICK SHIP PROGRAM

- Fixture mounting holes or tenon top - Specify
- Full base cover
- Anchor bolts - Fully galvanized
- Other finishes available - Contact Factory for lead time and prices
- Satin finish - deduct \$8 per foot

Full Freight Allowed \$4,000

**SHIPS IN
3 WEEKS**