



PROJECT NAME: _____

FIXTURE TYPE: _____

QSSNTS

SQUARE NON-TAPERED STEEL POLE



QUICK SHIP PROGRAM

Shaft

Square structural steel tube conforming to ASTM A501, minimum 46,000 PSI yield strength. Available in 11 GA (.120") or 7 GA (.180") wall thickness. Ground lug located inside shaft opposite hand hole.

Drilling - Side Mount

Includes removable pole cap. Standard drilling matches U.S. Architectural fixtures. For custom drilling, specify "DP" after drill pattern (e.g., 2-180DP).

Pole Top Mount

Standard PT27 mount fabricated from 3" tall (2.875" O.D.) steel pipe. Tenon options available; consult factory for custom configurations.

Hand Hole Cover

Reinforced 2 5/8" x 4 5/8" access opening with 3" x 5" heavy-gauge aluminum cover, secured by formed aluminum bar and tamper-resistant stainless steel screw.

Base Plate

Hot-rolled structural steel, minimum 36,000 PSI yield strength. Telescoped and circumferentially welded to shaft. Slotted bolt holes provide 1" adjustment on either side of bolt-circle centerline.

Anchorage

Four galvanized steel anchor bolts, minimum 50,000 PSI yield strength, with "L" bend and threaded end. Includes two nuts and two washers per bolt.

Base Cover

Two-piece, heavy-gauge carbon steel cover conceals base.

Finish

TGIC polyester powder coat over power-washed, media-blasted and iron-phosphate-pretreated substrate. Baked at 400°F for maximum adhesion, hardness and durability.



QUICK REFERENCE




Max Diameter	5"
Max Wall Thickness	11Ga
Max Height	25'
Finish	Black, Dark Bronze, Grey

QSSNTS

SELECT CONFIGURATIONS
ACCELERATED LEAD TIME

POLE				ANCHOR BOLTS			MAX E.P.A.				
CATALOG #	MOUNTING HEIGHT (ft)	DIAMETER (in)	WALL THICKNESS (In/Ga)	BOLT SIZE	BOLT CIRCLE DIA RANGE	BOLT CIRCLE DIA (In)	100 MPH	120 MPH	140 MPH	160 MPH	180 MPH
QSSNTS 104 - 11	10	4.00	11	3/4" x 18" x 3"	8" - 11"	9"	15.0	15.0	15.0	10.8	8.2
QSSNTS 124 - 11	12	4.00	11	3/4" x 18" x 3"	8" - 11"	9"	15.0	15.0	11.7	7.9	5.7
QSSNTS 144 - 11	14	4.00	11	3/4" x 18" x 3"	8" - 11"	9"	15.0	15.0	11.4	8.2	5.4
QSSNTS 154 - 11	15	4.00	11	3/4" x 18" x 3"	8" - 11"	9"	15.0	11.9	7.5	4.7	2.7
QSSNTS 164 - 11	16	4.00	11	3/4" x 18" x 3"	8" - 11"	9"	15.0	9.8	6.0	3.8	1.8
QSSNTS 184 - 11	18	4.00	11	3/4" x 18" x 3"	8" - 11"	9"	13.2	7.6	4.4	2.2	0.4
QSSNTS 204 - 11	20	4.00	11	3/4" x 24" x 3"	8" - 11"	10"	12.6	7.2	3.8	1.6	0.0
QSSNTS 204 - 7	20	4.00	7	3/4" x 30" x 3"	8" - 11"	11"	14.4	8.2	4.8	2.0	0.4
QSSNTS 254 - 11	25	4.00	11	3/4" x 24" x 3"	8" - 11"	11"	15.0	5.6	3.6	0.8	0.0
QSSNTS 254 - 7	25	4.00	7	3/4" x 30" x 3"	8" - 11"	11"	15.0	8.6	5.6	3.3	1.2
QSSNTS 185 - 11	18	5.00	11	1" x 36" x 4"	10 1/2" - 12 1/2"	12"	15.0	15.0	12.8	8.0	5.2
QSSNTS 205 - 11	20	5.00	11	1" x 36" x 4"	10 1/2" - 12 1/2"	12"	15.0	15.0	9.8	6.0	3.2
QSSNTS 205 - 7	20	5.00	7	1" x 36" x 4"	10 1/2" - 12 1/2"	12"	15.0	15.0	12.0	7.2	4.4
QSSNTS 255 - 11	25	5.00	11	1" x 36" x 4"	10 1/2" - 12 1/2"	12"	15.0	8.6	3.6	1.0	0.0
QSSNTS 255 - 7	25	5.00	7	1" x 36" x 4"	10 1/2" - 12 1/2"	12"	15.0	10.2	10.4	5.4	2.5

BOLT CIRCLE

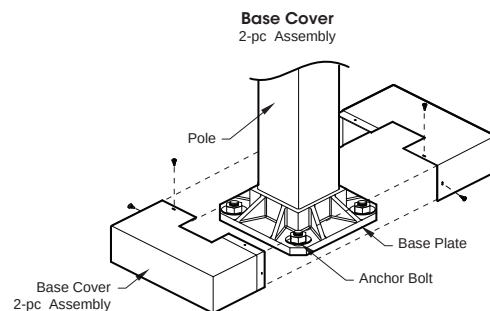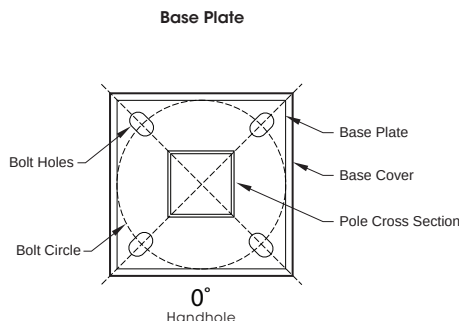

INCLUDED IN QUICK SHIP PROGRAM

- Fixture mounting holes or tenon top - Specify
- Full base cover
- Anchor bolts - Fully galvanized
- Other finishes available - Contact Factory for lead time and prices
- Satin finish - deduct \$8 per foot

Full Freight Allowed \$4,000

**SHIPS IN
3 WEEKS**