

TRADITIONAL STYLED BASE

1900 Series

Base

One piece corrosion resistant, durable cast aluminum One piece corrosion resistant, durable cast aluminum construction. Decorative Base consists of a bottom Ring, topped by two smaller Rings and evenly spaced vertical stylized flutes. Base contains a large Hand Hole Cover contoured to Base design. Hand Hole Cover supplied with tamper resistant hardware. Grounding Lug provided inside base opposite Hand Hole.


Anchorage

A 3/4" cast aluminum anchor ring is welded 1" above bottom of base to accept (4) fully galvanized anchor bolts. Each bolt supplied with two nuts and two washers. Anchorage is fastened through hand hole.

Finish


Electrostatically applied TGIC Polyester Powder Coat on substrate prepared with 20 PSI power wash at 140°F. Four step media blast and iron phosphate pretreatment for protection and paint adhesion. 400°F bake for maximum hardness and durability.

ANCHORAGE DATA

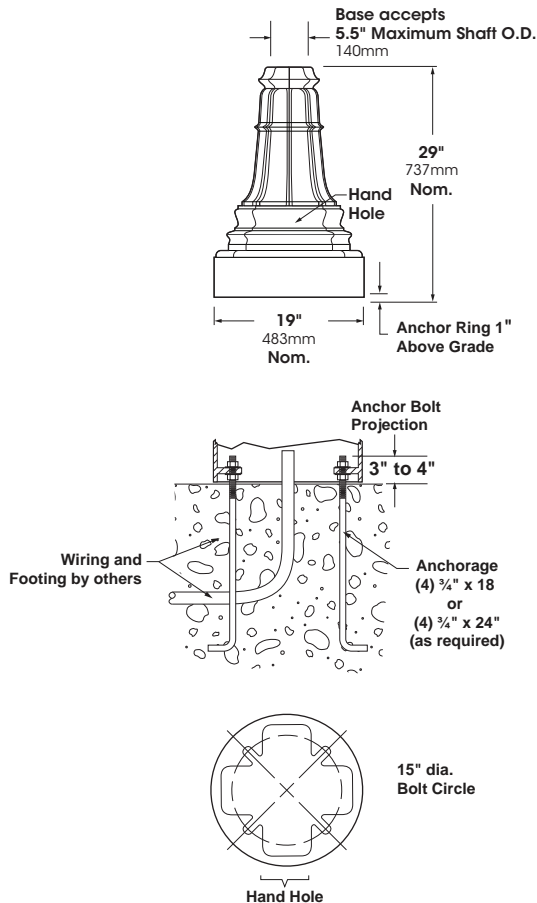


1900

OPTIONS

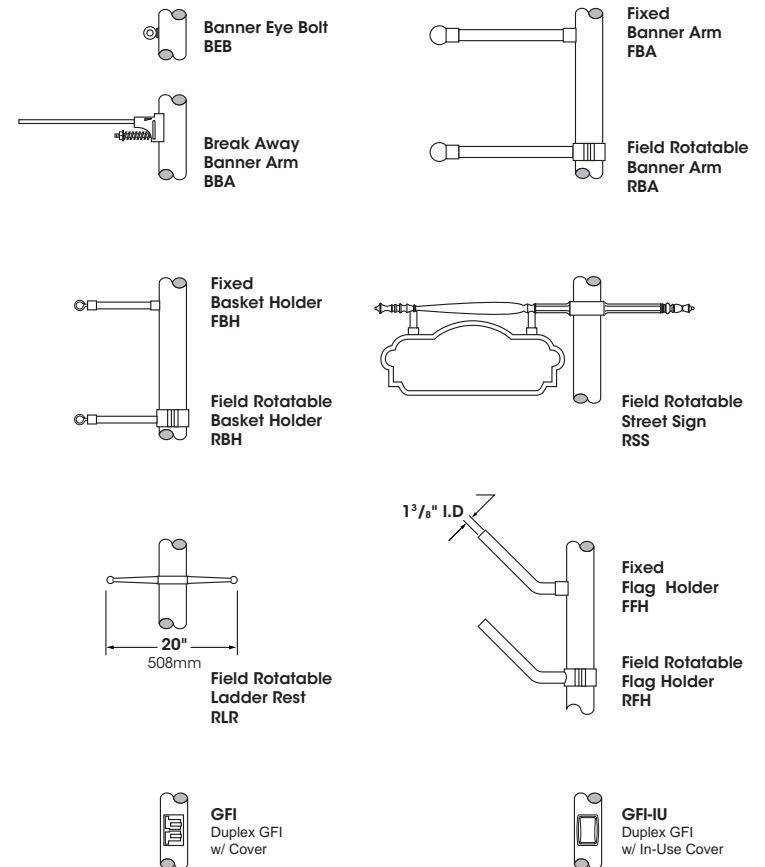

2025206

SAMPLE ASSEMBLIES

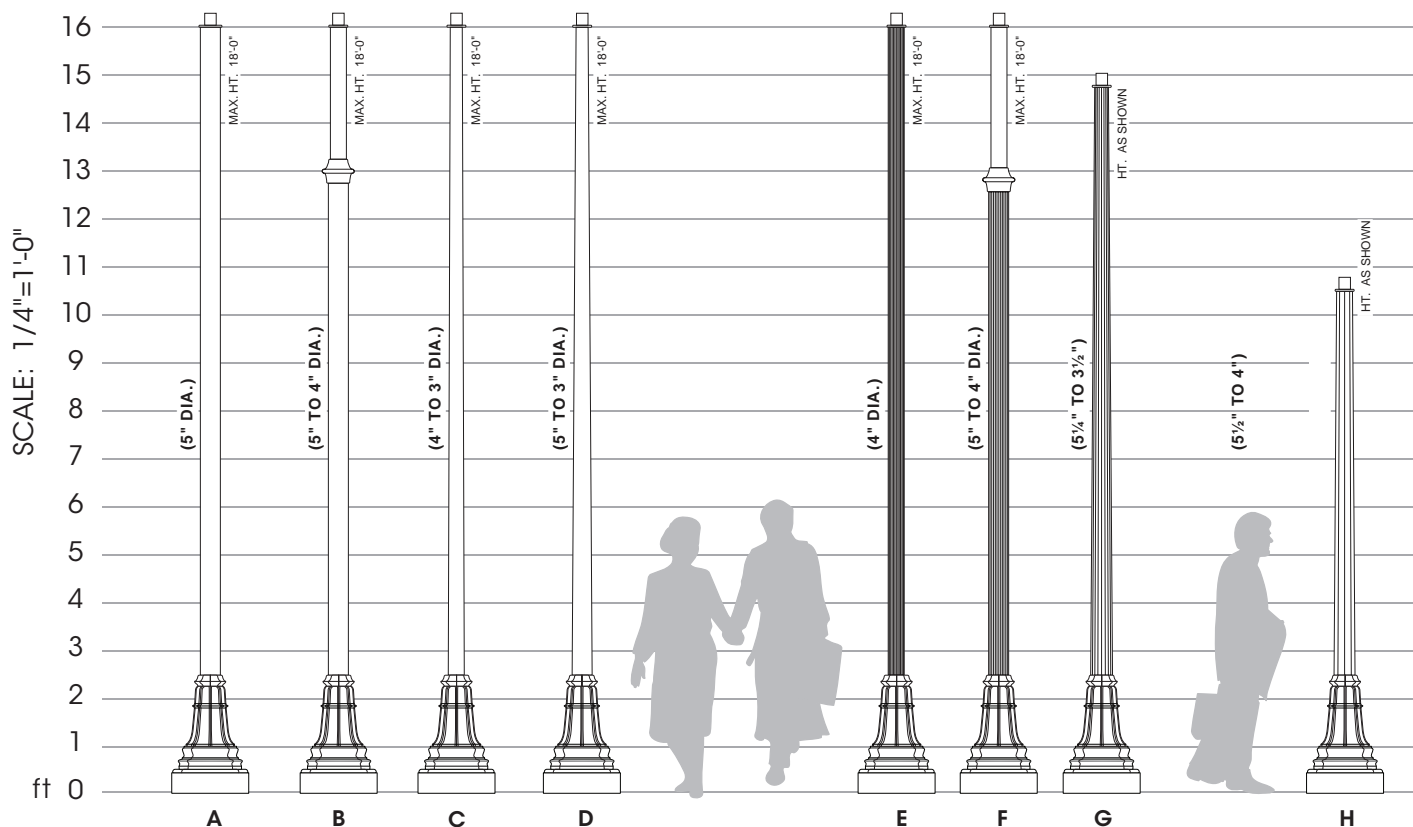

Finish Standard Textured (-T)

- ☐ Black
RAL-9005-T
- ☐ White
RAL-9003-T
- ☐ Grey
RAL-7004-T
- ☐ Dark Bronze
RAL-8019-T
- ☐ Green
RAL-6005-T

Premium Finishes

- ☐ Patina
Copper
PC
- ☐ Rust
- ☐ Custom
Specify RAL# _____
- ☐ Anodized
AZ

See USALTG.COM for
additional colors

- A. 19-1050-XX-PT27/OPTIONS/FINISH
- B. 19-5040-XX-PT27/OPTIONS/FINISH
- C. 19-1030T-XX-PT27/OPTIONS/FINISH
- D. 19-1035T-XX-PT27/OPTIONS/FINISH
- E. 19-1060-XX-PT27/OPTIONS/FINISH
- F. 19-7040-XX-PT27/OPTIONS/FINISH
- G. 19-1030C-XX-PT27/OPTIONS/FINISH
- H. 19-1058C-XX-PT27/OPTIONS/FINISH

Note: XX represents height, example 10 foot and 6 inches will be written as 10'-6": 19-1040-10'-6"-PT27/OPTIONS.

Sample Assemblies show a small offering of the Sun Valley Line of Poles & Shafts.

Please visit usaltdg.com for the full product offering.